




Automation solutions

Visualization solutions, modular and compact control systems, remote I/O systems and software: Eaton offer a wide spectrum of automation solutions.



XV - visualisation solutions

Simple operation relieves operators of machinery, installations or individual applications
+++ Simultaneous high performance PLC +++ Resistive touch displays or robust infrared touch displays from 3.5 – 15 inches

XC - modular PLCs

Construction scalable within wide limits +++ Different PLC performance classes, multiple expansion modules +++ Integration into communication concept +++ Data exchange through Ethernet and integrated Web server facilitate innovative solutions



EC4P – Compact control system

Many functions in one device +++ Automation of smaller applications +++ Ethernet variants allow remote programming +++ Numerous local expansion modules, easyNet extensions, CANopen extensions and network modules


XI/ON – Remote I/O system

Control movements, measure temperature or speed, record currents and voltages +++ Ideal for solutions focused on remote signal processing +++ Modular concept and simple handling

Software

All controls programmed with CoDeSys in compliance with IEC 61131-3 +++ Easy and efficient generation of operator guidance with interactive visualization software Galileo +++ Mask generation for HMI-PLC devices (XV100, XV400); also with integrated CoDeSys visualization +++ Convenient, uncomplicated planning and realization of XI/ON stations with the cost-free I/O Assistant +++ Generate SmartWire-DT configurations with cost-free SWD-Assist







System overview	
Touch Panel XV	14/2
Description	
Touch Panel XV	14/4
Ordering	
Touch Panel XV	
HMI(-PLC) XV100	14/5
HMI-PLC XV200	14/6
HMI-PLC MFD4, HMI XVH300	14/7
HMI-PLC XVS400	14/8
HMI Mobile Panel XVM400	14/9
HMI-PLC XV400	14/10
XV accessories	14/12
Engineering	
Communication protocols, licensing	14/14
Technical data	
Touch Panel XV	
HMI(-PLC) XV100	14/18
HMI-PLC XV200	14/20
HMI-PLC MFD4	14/22
HMI Mobile Panel	14/23
HMI XVH300	14/24
HMI-PLC XV400	14/28
HMI-PLC XVS400	14/32
Dimensions	
Touch Panel XV	14/34
System overview	
XC100, XC121, XC200 modular PLCs	14/36
Ordering	
XC100, XC121, XC200 modular PLCs	14/38
XI/OC input/output expansion	14/39
Accessories	14/40
Technical data	
XC100 modular PLCs	14/42
Text display for XC100 modular PLC	14/44
XC121 modular PLCs	14/45
Input/output expansion for XC121	14/47
XC200 modular PLCs	14/49
I/O expansions XI/OC	14/51
Dimensions	
XC100, XC200 Modular PLCs	14/59
XI/OC input/output expansion	14/59
Text display for XC100 modular PLC	14/60
XC121 modular PLCs, XIO-EXT expansion	14/60



System overview	
EC4P compact PLCs	14/62
Ordering	
EC4P compact PLCs	14/64
Expansion devices	14/65
Accessories	14/66
Technical data	
EC4P compact PLCs	14/70
I/O expansions EC4E	14/75
MFD-CP4-CO communication modules	14/79
Dimensions	
Compact PLCs, I/O expansions, communication modules	14/80
System overview	
Remote I/O XI/ON	14/82
Description	
Remote I/O XI/ON	14/84
Selection chart	14/85
Maximum system configuration	14/86
Ordering	
Gateways	14/88
Power supply modules	14/90
I/O modules	14/91
Technology modules	14/93
Basic modules	14/94
I/O expansions, SWD, accessories	14/97
Engineering	
Gateways, supply modules	14/99
I/O modules	14/100
Technology modules	14/110
Technical data	
General information, terminals	14/111
Gateways	14/112
Supply modules	14/113
I/O modules	14/114
Technology Modules	14/122
Dimensions	
Gateways, XNE electronics modules	14/124
XN Electronics modules	14/125
Base modules	14/126
Software	14/128
Power supplies	14/131



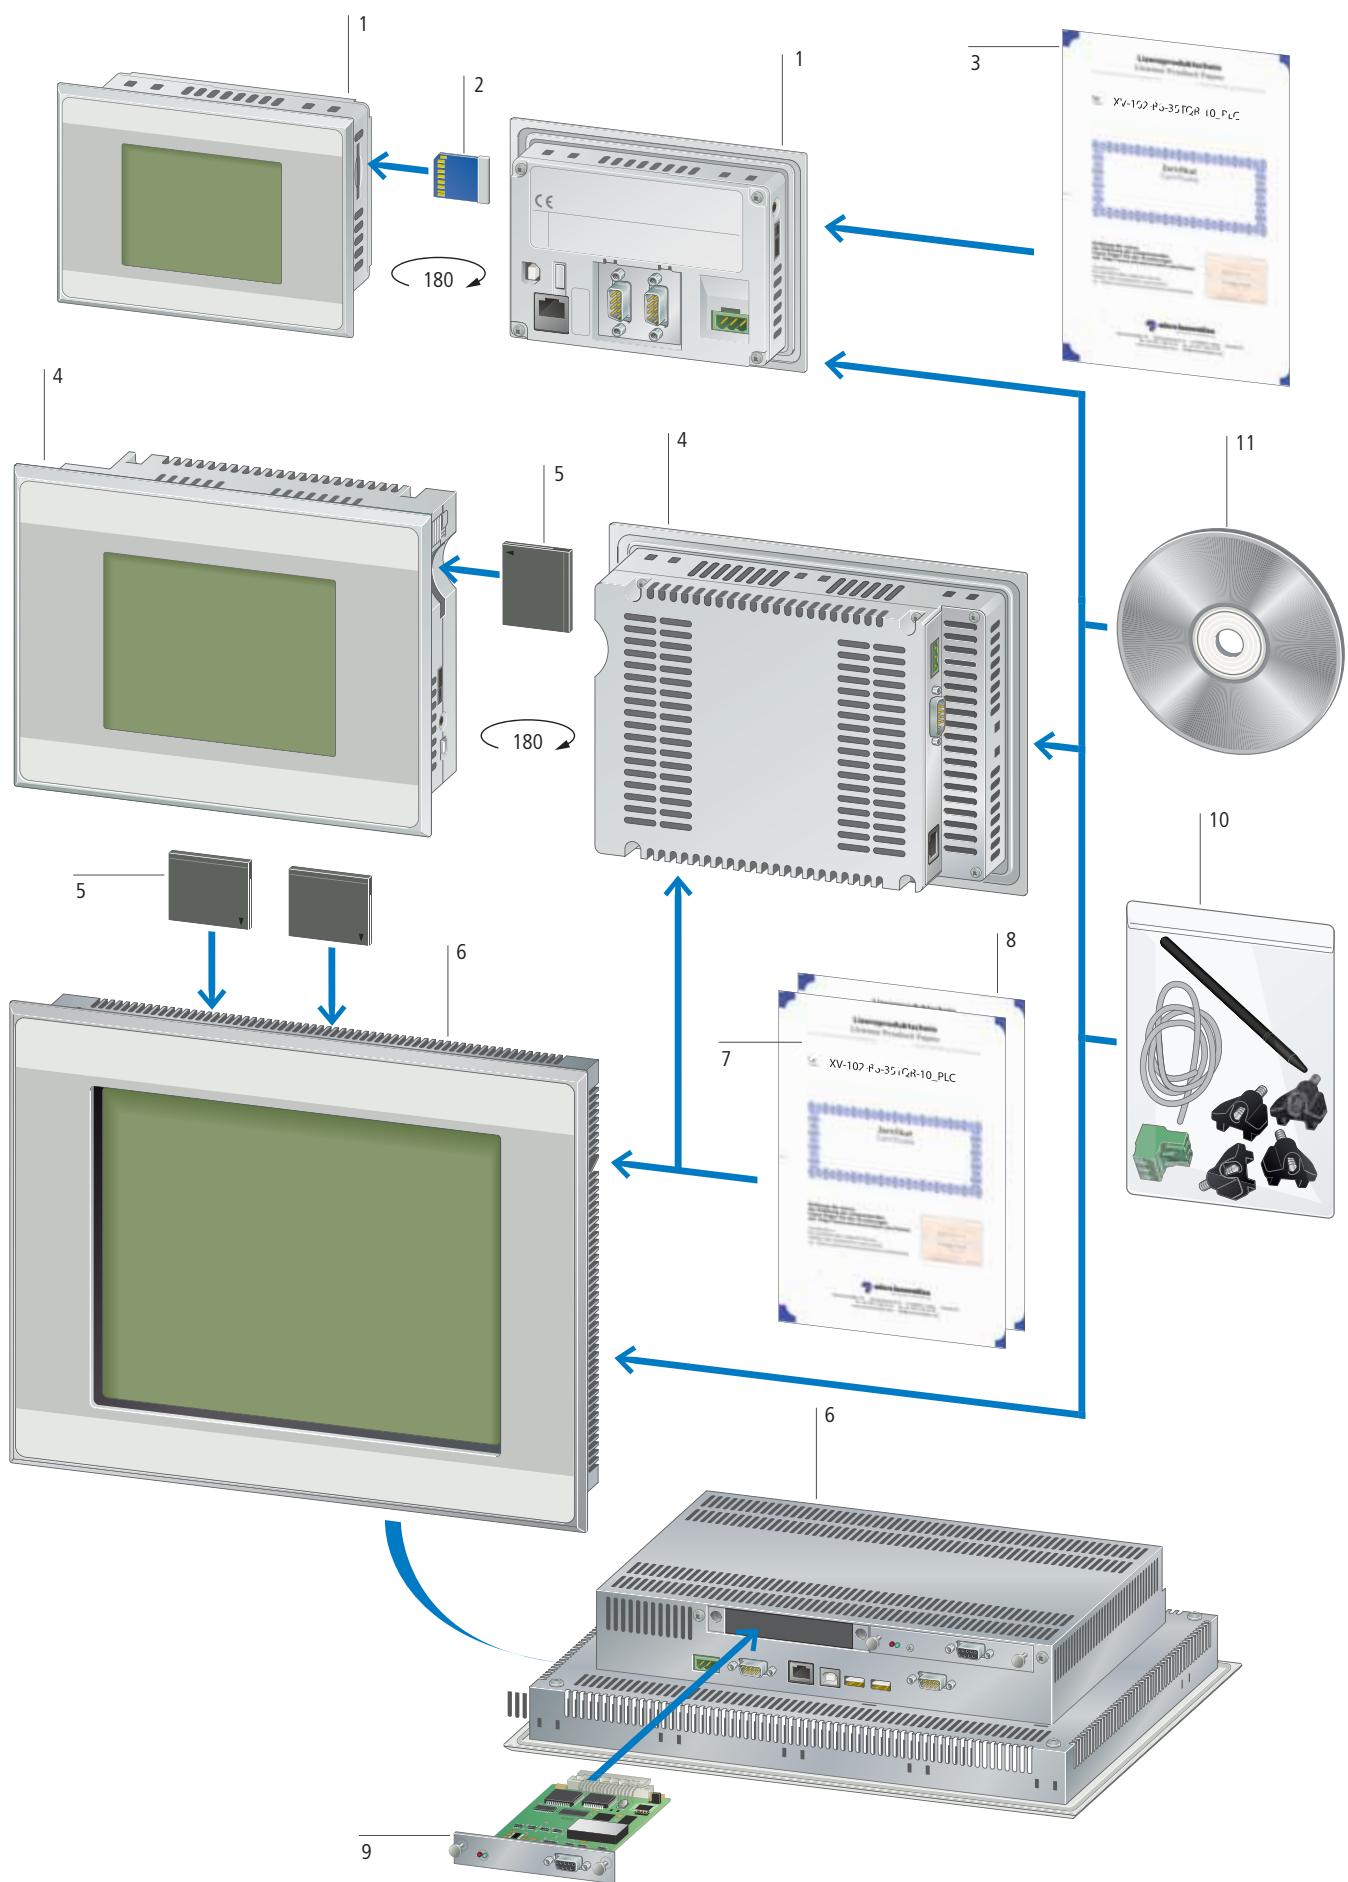System overview

XV100 HMI/PLC with touch display	1	XV200 HMI/PLC with touch display	4	XV400 HMI/PLC with touch display	6	Communication card for XV400	9
Compact operator panels with wide range of functions.		Fully graphic 5.7" devices with monochrome or color display (STN).		5.7", 8.4", 10.4", 12.1", 15" devices		Depending on device size 1 or 2 cards can be plugged in.	
Fully-graphical 3.5", 5.7" or 7" wide-screen devices.		Resistive touch		TFT color display		→ Page 14/13	
TFT display, color or monochrome		Ethernet interface on board.		Infra-red or Resistive-touch.			
Resistive touch		In addition CAN, PROFIBUS, or RS232 possible.		Numerous communication possibilities through pluggable communication cards.			
Ethernet interface on board.				Also available in stainless steel design.			
In addition CAN, PROFIBUS, RS232 or RS485 possible.				→ Page 14/6			
→ Page 14/5							
SD memory card	2	Compact-Flash memory card	5	XV license product certificate	7	Mounting kit	10
Optional memory for project, recipe data, etc.		Memory for project, recipe data, etc.		Expansion of device functionality through assignment of license points.		Additional fixing kits for all XV devices.	
→ Page 14/12		With or without pre-installed Win CE operating system.		Licensing is through the Internet.		Fixing kit are generally included as standard.	
		→ Page 14/12		→ Page 14/10		The illustration shows an XV-100 fixing kit.	
XV license product certificate	3					→ Page 14/12	
Expansion of device functionality through assignment of license points.							
Licensing is through the Internet.							
→ Page 14/12							
				Windows CE licence	8	Software	11
				Win CE license with license label.		Visualization software Galileo	
				→ Page 14/12		Programming software XSOFT-CODESYS, EPAM	
						→ Page 14/130	



Description



HMI with integrable PLC

The modern touch displays XV can optionally be used as fully-featured PLCs. This cost-saving, leading-edge concept offers the perfect solution for every application, whether in the low-cost segment or in the demanding high-end segment, where performance is key. The devices are available in display sizes from 3.5" to 15" and, depending on model with resistive or infrared touch. Alternatively, the panels can also be mounted edgewise.

XV100: Designed for the low-cost segment, these devices excel with a compact design, light-weight plastic housing and a wide range of onboard interfaces. Despite its small size, the XV100 with 3.5" touch display has an exceptional range of performance features, including PLC function.

The touch panels with 5.7" and 7" display feature an additional USB host and an RS232 interface.



XVS400 and XV400: These multipurpose devices with their rugged metal housing are exceptionally flexible and provide comprehensive communication possibilities. The XVS400 features a PROFIBUS-DP master/MPI interface as standard as well as Ethernet, RS232 and onboard USB host. With optional communication modules the XV400 can be easily and quickly expanded and adapted.

The XV400 with stainless steel front is also ideally equipped for special applications:

- IP69K: cleaning using high-pressure and steam jets (5.7")
- Ex zone 1: For use in potentially explosive atmospheres (10.4" and 12.1")

XVM400: The mobile version with its round, ergonomic design is easy to operate with just one hand.



Licencing procedure

To make sure that you pay for only those functions that you actually need, the devices work with a license point system. Use the points to activate specific functions, such as:




- Runtime for the visualization (GALILEO or EPAM)
- Communication (e.g. Ethernet, CANopen, Siemens MPI)
- Tools (e.g. CE Telediag, S7 PG Router)
- XSOFT-CODESYS-2 runtime for the PLC function

With license product certificates you can buy additional license points. This has the following benefits for you:

- Cost optimization
- Low warehousing costs
- Flexible handling

→ For detailed information about this topic see chapter Licensing

Ordering

Display	Front design	Screen diagonal Inches	Resolution Pixels	Communication interface	Part No. Article No.	Price See price list	Std. pack
XV100							
<ul style="list-style-type: none"> HMI or HMI PLC with communication through on-board interface. Communication scope extendable through licensing, → Page 14/12. Standard front, special front please inquire Insulating enclosure and front plate Processor: RISC central processing unit, 32-bit, 400 MHz OS, program and data memory: 64 MB 1 slot for 1 SD card Software (engineering): Visualization = GALILEO or EPAM, PLC = XSOFT-CODESYS-2 (depending on version) Windows CE Core 5.0 license (incl.) <p>- Built-in interfaces: 1 × Ethernet 100/10, 1 × USB device, communications interface - No PLC function possible</p>							
 Resistive touch 3.5" TFT LCD 32 grey levels		Standard membrane (fully enclosed)	3.5	320 x 240	–	XV-102-A0-35MQR-10 141759	1 off 
PROFIBUS							
RS232							
RS485							
CAN RS232							
XV-102-A5-35MQR-10 141823							
<p>- Built-in interfaces: 1 × Ethernet 100/10, 1 × USB device, communications interface - Can be expanded with PLC function, → Page 14/14</p>  Resistive touch 3.5" TFT LCD 64 k Colors		Standard membrane (fully enclosed)	3.5	320 x 240	–	XV-102-B0-35TQR-10 140007	1 off 
PROFIBUS							
RS232							
RS485							
CAN RS232							
XV-102-B5-35TQR-10 140011							
<p>- Including PLC function - Built-in interfaces: 1 × Ethernet 100/10, 1 × USB device, communications interface</p>  Resistive touch 3.5" TFT LCD 32 grey levels		Standard membrane (fully enclosed)	3.5	320 x 240	–	XV-102-B0-35MQR-10-PLC 140012	1 off 
RS232							
RS485							
CAN RS232							
XV-102-B4-35MQR-10-PLC 140014							
PROFIBUS							
RS485							
CAN RS485							
XV-102-B8-35MQR-10-PLC 140017							
PROFIBUS RS485							
CAN RS485							
XV-102-B0-35TQR-10-PLC 140018							
RS232							
RS485							
CAN RS485							
XV-102-B3-35TQR-10-PLC 140019							
RS232							
RS485							
CAN RS485							
XV-102-B4-35TQR-10-PLC 140020							
RS232							
RS485							
CAN RS485							
XV-102-B5-35TQR-10-PLC 140021							
RS232							
RS485							
CAN RS485							
XV-102-B6-35TQR-10-PLC 140022							
PROFIBUS RS485							
CAN RS485							
XV-102-B8-35TQR-10-PLC 140023							
 Resistive touch 3.5" TFT LCD 64 k Colors		Standard membrane (fully enclosed)	3.5	320 x 240	–	XV-102-BB-35MQR-10-PLC 140024	
RS232							
RS485							
CAN RS485							
XV-102-BB-35MQR-10-PLC 140024							

**Information relevant
for export to
North America**

Product Standards
UL File No.
UL CCN
CSA File No.
CSA Class No.
NA Certification




UL 60950-01; cUL;
IEC/EN 61131-2; CE marking
E208621
NWGQ2, NWGQ8
UL report applies to both US and Canada
-
UL Recognized, certified by UL for use in Canada

Conditions of Acceptability



The investigated Pollution Degree is: 2
The following end-product enclosures are required:
Fire. The unit must be supplied via a SELV source. The provided Ethernet Connection is only allowed to connect to inhouse networks

Degree of Protection

IEC: IP65, UL/CSA Type: -

Display	Front design	Screen diagonal Inches	Resolution Pixels	Communication interface	Part No. Article No.	Price See price list	Std. pack	
XV100								
<ul style="list-style-type: none"> - Built-in interfaces: 1 x Ethernet 100/10, 1 x USB device, 1 x USB host, communications interface - Can be expanded with PLC function, → Page 14/14 								
	Resistive touch 5.7" TFT LCD 64 k Colors	Standard membrane (fully enclosed)	5.7	640 x 480	RS232	XV-102-D0-57TVR-10 142530	1 off	
			5.7	640 x 480	CAN RS232 RS485	XV-102-D6-57TVR-10 142531		
			5.7	640 x 480	PROFIBUS RS232 RS485	XV-102-D8-57TVR-10 142532		
	Resistive touch 7" TFT LCD 64 k Colors		7	800 x 480	RS232	XV-102-D0-70TWR-10 142535		
			7	800 x 480	CAN RS232 RS485	XV-102-D6-70TWR-10 142536		
			7	800 x 480	PROFIBUS RS232 RS485	XV-102-D8-70TWR-10 142537		
<ul style="list-style-type: none"> - Including PLC function - Built-in interfaces: 1 x Ethernet 100/10, 1 x USB device, 1 x USB host, communications interface 								
	Resistive touch 5.7" TFT LCD 64 k Colors	Standard membrane (fully enclosed)	5.7	640 x 480	CAN RS232 RS485	XV-102-D6-57TVR-10-PLC 142533	1 off	
			5.7	640 x 480	PROFIBUS RS232 RS485	XV-102-D8-57TVR-10-PLC 142534		
	Resistive touch 7" TFT LCD 64 k Colors		7	800 x 480	CAN RS232 RS485	XV-102-D6-70TWR-10-PLC 142538		
			7	800 x 480	PROFIBUS RS232 RS485	XV-102-D8-70TWR-10-PLC 142539		
XV200								
	<ul style="list-style-type: none"> • HMI or HMI PLC with communication through on-board interface. • PLC function and communications scope can be upgraded with licenses, → Page 14/12. • Standard front, special front please inquire • Insulating enclosure and front plate • Processor: RISC central processing unit, 32-bit, 200 MHz • OS, program and data memory: 32 MB. • Built-in interfaces: 1 x Ethernet, 1 x USB device, communications interface • 1 slot for 1 Compact Flash™ card. • Software (engineering): visualization = GALILEO or EPAM, PLC = XSOFT-CODESYS-2 • Windows CE license required • Compact Flash™ required → XV accessories • Flush mounting compatible with 5.7" XV-400 devices and older predecessors 							
	Resistive touch 5.7" FSTN LCD (monochrome display) 256 grey levels	Standard membrane	5.7	320 x 240	CAN	XV-230-57CNN-1-10 139951	1 off  	
			5.7	320 x 240	PROFIBUS	XV-230-57MPN-1-10 139952		
			5.7	320 x 240	RS232	XV-232-57BAS-1-10 139950		
	Resistive touch 5.7" CSTN LCD (Color display)		5.7	320 x 240	CAN RS232	XV-252-57CNN-1-10 139956		
			5.7	320 x 240	PROFIBUS RS232	XV-252-57MPN-1-10 139957		

Information relevant for export to North America 	Product Standards UL File No. UL CCN CSA File No. CSA Class No. NA Certification	UL 60950-01; cUL; IEC/EN 61131-2; CE marking E208621 NWGQ2, NWGQ8 UL report applies to both US and Canada – UL Recognized, certified by UL for use in Canada	Conditions of Acceptability Degree of Protection	The investigated Pollution Degree is: 2 The following end-product enclosures are required: Fire, Electrical The unit must be supplied via a SELV source. The provided Ethernet Connection is only allowed to connect to inhouse networks. IEC: IP65, UL/CSA Type: -
--	---	--	---	---

Display	Screen diagonal Inches	Resolution Pixels	Communication interface	Part No. Article No.	Price See price list	Std. pack
MFD4						
<ul style="list-style-type: none"> Memory card pluggable (optional) → Page 14/41 Real-time clock Operating system: Windows CE 	Resistive touch 5.7" TFT LCD 32 k Colors	5.7	320 x 240	Ethernet CANopen/easyNet RS232	MFD4-5-XRC-30 109428	1 off
XVH300						
<ul style="list-style-type: none"> HMI (No PLC function possible) with communication through on-board interface. Communication scope extendable through licensing, → Page 14/12. Standard front, special front please inquire Metal enclosure and front plate Processor: RISC central processing unit, 32-bit, 200 MHz OS, program and data memory: 64 MB Display: 5.7" CSTN LCD (Color display), 256 colors Built-in interfaces: 1 × Ethernet, 1 × USB device, communications interface 1 slot for 1 Compact Flash™ card Software (engineering): visualization = GALILEO or EPAM WinCE license required → XV accessories Compact Flash™ required → XV accessories 	Infra-red touch 5.7" CSTN LCD (Color display)	Standard front with standard membrane Laminated safety glass, non-reflective	5.7 5.7 5.7 5.7 5.7 5.7	320 x 240 320 x 240 320 x 240 320 x 240 320 x 240 320 x 240	– CAN PROFIBUS RS485 (Suconet K) RS232 (Sucom A) CAN	XVH-340-57BAS-1-10 139869 XVH-340-57CAN-1-10 139870 XVH-340-57MPI-1-10 139871 XVH-342-57SKS-1-10 139873 XVH-340-57CAN-1-50¹⁾ 139872
	Resistive touch 5.7" CSTN LCD (Color display)	Standard front with standard membrane (fully laminated)	5.7 5.7 5.7	320 x 240 320 x 240 320 x 240	– CAN PROFIBUS	XVH-330-57BAS-1-10 139866 XVH-330-57CAN-1-10 139867 XVH-330-57MPI-1-10 139868

Notes**Information relevant for export to North America**

¹⁾ Approved for IP69K.
Observe installation instructions to IP69K.

Product Standards	UL 60950-01; cUL; IEC/EN 61131-2; CE marking E208621 NWGQ2, NWGQ8 UL report applies to both US and Canada
UL File No.	–
UL CCN	NWGQ2, NWGQ8
CSA File No.	UL report applies to both US and Canada
CSA Class No.	–
NA Certification	UL Recognized, certified by UL for use in Canada
Conditions of Acceptability	The investigated Pollution Degree is: 2 Proper bonding to the end-product main protective earthing termination is: Required The following end-product enclosures are required: Fire, Electrical The unit must be supplied via a SELV source. The provided Ethernet Connection is only allowed to connect to inhouse networks. IEC: IP65, UL/CSA Type: -
Degree of Protection	



Display	Front design	Screen diagonal Inches	Resolution Pixels	Part No. Article No.	Price See price list	Std. pack
XVS400						
<ul style="list-style-type: none"> HMI or HMI PLC with communication through on-board interface. PLC function and communications scope can be upgraded with licenses, → Page 14/12. Standard front, special front please inquire Metal enclosure and front plate Processor: RISC central processing unit, 32-bit, 400 MHz OS, program and data memory: 64 MB Software (engineering): visualization = GALILEO or EPAM, PLC = XSOFT-CODESYS-2 WinCE license required → XV accessories Compact Flash™ required → XV accessories <p>— Display: 5.7" CSTN LCD (color display), 256 colors — 1 slot for Compact Flash™ cards — Built-in interfaces: 1 × Ethernet 100/10, 1 × RS232, 1 × PROFIBUS, 1 × USB host, 1 × USB device</p>						
	Resistive touch 5.7" CSTN LCD (Color display)	Standard membrane (fully laminated)	5.7	320 x 240	XVS-430-57MPI-1-10 139967	
	Infra-red touch 5.7" TFT LCD	Standard membrane Laminated safety glass, non-reflective	5.7	320 x 240	XVS-460-57MPI-1-10 139970	
<p>— Display: 5.7" or 8.4" TFT LCD (Color display), adjustable: 65536 or 256 colors — 1 slot for Compact Flash™ card — Built-in interfaces: 1 × Ethernet 100/10, 1 × RS232, 1 × PROFIBUS, 1 × USB host, 1 × USB device</p>						
	Infra-red touch 5.7" CSTN LCD (Color display)	Standard membrane Laminated safety glass, non-reflective	5.7	320 x 240	XVS-440-57MPI-1-10 139968	
	Resistive touch 5.7" TFT LCD	Standard membrane (fully laminated)	5.7	320 x 240	XVS-450-57MPI-1-10 139969	
	Infra-red touch 8.4" TFT LCD	Standard membrane Laminated safety glass, non-reflective	8.4	640 x 480	XVS-460-84MPI-1-10 139971	
<p>— Display: 10.4", 12.1" or 15" TFT LCD (Color display), adjustable: 65536 or 256 colors — 2 slots for Compact Flash™ cards — Built-in interfaces: 1 × Ethernet 100/10, 1 × RS232, 1 × PROFIBUS, 2 × USB host, 1 × USB device</p>						
	Infra-red touch 10.4" TFT LCD	Standard membrane Laminated safety glass, non-reflective	10.4	640 x 480	XVS-440-10MPI-1-10 139973	
	Resistive touch 10.4" TFT LCD	Standard membrane (fully laminated)	10.4	640 x 480	XVS-430-10MPI-1-10 139972	
	Infra-red touch 12.1" TFT LCD	Standard membrane Laminated safety glass, non-reflective	12.1	800 x 600	XVS-440-12MPI-1-10 139975	
	Resistive touch 12.1" TFT LCD	Standard membrane (fully laminated)	12.1	800 x 600	XVS-430-12MPI-1-10 139974	
	Infra-red touch 15" TFT LCD	Standard membrane Laminated safety glass, non-reflective	15	1024 x 768	XVS-460-15MPI-1-10 139976	
Information relevant for export to North America						
	Product Standards UL File No. UL CCN CSA File No. CSA Class No. NA Certification Conditions of Acceptability	UL 60950-01; cUL; IEC/EN 61131-2; CE marking E208621 NWGQ2, NWGQ8 UL report applies to both US and Canada — UL Recognized, certified by UL for use in Canada The investigated Pollution Degree is: 2 Proper bonding to the end-product main protective earthing termination is: Required The following end-product enclosures are required: Fire, Electrical The unit must be supplied via a SELV source. The provided Ethernet Connection is only allowed to connect to inhouse networks. Degree of Protection	IEC: IP65, UL/CSA Type: -			

Display	Operating elements	Part No. Article No.	Price See price list	Std. pack	Information relevant for export to North America
XVM400					
	<ul style="list-style-type: none"> Mobile HMI (No PLC function possible) with communication through on-board interface. Communication scope extendable through licensing, → Page 14/12. Standard front, 31 membrane keys, 4 status LEDs Insulating enclosure and front plate Processor: RISC central processing unit, 32-bit, 400 MHz OS, program and data memory : min 64 MB Built-in interfaces: 1 × Ethernet, 1 × RS232-C, 1 × USB host Software (engineering): Visualization = GALILEO (runtime already installed) Windows CE 5.0 license (incl.) 				
	Resistive touch 6.5" TFT LCD 64 k Colors	2 acknowledgement keys (3-stage, 2-circuit) externally wired Emergency switching off button (2-circuit), externally wired	XVM-430-65TVB-1-11 139996	1 off 	Product Standards UL 508; cUL; IEC/EN 6113-2; CE marking E176666 UL File No. UL CCN CSA File No. CSA Class No. NA Certification Degree of Protection
	Resistive touch 6.5" TFT LCD 64 k Colors	2 acknowledgement keys (3-stage, 2-circuit) externally wired Emergency switching off button (2-circuit), externally wired Key switch (3-position), internally wired Electronic hand wheel, internally wired	XVM-450-65TVB-1-11 139998		UL report applies to both US and Canada - UL Recognized, certified by UL for use in Canada IEC: IP65, UL/CSA Type: -
	Resistive touch 6.5" TFT LCD 64 k Colors	2 acknowledgement keys (3-stage, 2-circuit) externally wired Key switch (3-position), internally wired Electronic hand wheel, internally wired	XVM-410-65TVB-1-11 139997		

Display	Front design	Screen diagonal Inches	Resolution Pixels	Part No. Article No.	Price See price list	Std. pack	Notes
XV400							
<ul style="list-style-type: none"> • HMI or HMI PLC with communication through on-board interface. • PLC function and communications scope can be upgraded with licenses, → Page 14/12. • Standard front, stainless steel front, special fronts please inquire • Metal enclosure and front plate • Processor: RISC central processing unit, 32-bit, 400 MHz • OS, program and data memory: 64 MB • Software (engineering): visualization = GALILEO or EPAM, PLC = XSOFT-CODESYS-2 • WinCE license required → XV accessories • Compact Flash™ required → S XV accessories 							
<ul style="list-style-type: none"> — Display: 5.7" CSTN LCD (color display), 256 colors — 1 slot for Compact Flash™ cards — 1 slot for communication cards — Built-in interfaces: 1 × Ethernet 100/10, 1 × RS232, 1 × CAN, 1 × USB host, 1 × USB device 							
	Infra-red touch 5.7" CSTN LCD (Color display)	Standard front with standard membrane Laminated safety glass, non-reflective	5.7	320 x 240	XV-442-57CQB-1-10 139892		—
	Infra-red touch 5.7" CSTN LCD (Color display)	Four-hole front with standard membrane Laminated safety glass, non-reflective	5.7	320 x 240	XV-442-57CQB-1-20 139894		1)
	Infra-red touch 5.7" CSTN LCD (Color display)	Satin-finish brushed stainless steel Laminated safety glass, non-reflective	5.7	320 x 240	XV-442-57CQB-1-50 139896		1) 2)
	Resistive touch 5.7" CSTN LCD (Color display)	Standard front with standard membrane (fully laminated)	5.7	320 x 240	XV-432-57CQB-1-10 139890		—
<ul style="list-style-type: none"> — Display: 5.7" or 8.4" TFT LCD (Color display), adjustable: 65536 or 256 colors — 1 slot for Compact Flash™ card — 1 slot for communication cards — Built-in interfaces: 1 × Ethernet 100/10, 1 × RS232, 1 × CAN, 1 × USB host, 1 × USB device 							
	Infra-red touch 5.7" TFT LCD	Standard front with standard membrane Laminated safety glass, non-reflective	5.7	320 x 240	XV-460-57TQB-1-10 139897		—
	Infra-red touch 5.7" TFT LCD	Satin-finish brushed stainless steel Laminated safety glass, non-reflective	5.7	320 x 240	XV-460-57TQB-1-50 139898		2)
	Resistive touch 5.7" TFT LCD	Standard front with standard membrane (fully laminated)	5.7	320 x 240	XV-450-57TQB-1-10 139899		—
	Infra-red touch 8.4" TFT LCD	Standard front with standard membrane Laminated safety glass, non-reflective	8.4	640 x 480	XV-460-84TVB-1-10 139900		—

Instructions

1) Not for new applications.

2) Approved for II 2G Ex px II IP5x (ATEX 94/9/EC);
Observe installation instructions to IP69K.

Information relevant for export to North America



Product Standards

UL File No.

UL CCN

CSA File No.

CSA Class No.

NA Certification

Conditions of Acceptability

UL 60950-01; cUL; IEC/EN 61131-2; CE marking

E208621

NWGQ2, NWGQ8

UL report applies to both US and Canada

—

UL Recognized, certified by UL for use in Canada

The investigated Pollution Degree is: 2

Proper bonding to the end-product main protective earthing

termination is: Required


The following end-product enclosures are required: Fire, Electrical

The unit must be supplied via a SELV source.

The provided Ethernet Connection is only allowed to connect to inhouse networks.

IEC: IP65, UL/CSA Type: -

Degree of Protection

Display	Front design	Screen diagonal Inches	Resolution Pixels	Part No. Article No.	Price See price list	Std. pack	Notes
XV400							
<ul style="list-style-type: none"> — Display: 10.4", 12.1" or 15" TFT LCD (Color display), adjustable: 65536 or 256 colors — 2 slots for Compact Flash™ cards — 2 slots for communication cards — Built-in interfaces: 1 × Ethernet 100/10, 1 × RS232, 1 × CAN, 2 × USB host, 1 × USB device 							
	Infra-red touch 10.4" TFT LCD	Standard front with standard membrane Laminated safety glass, non-reflective	10.4	640 x 480	XV-440-10TVB-1-10 139904	1 off  	-
	Infra-red touch 10.4" TFT LCD	Four-hole front with standard membrane Laminated safety glass, non-reflective	10.4	640 x 480	XV-440-10TVB-1-20 139906	1 off  	1)
	Infra-red touch 10.4" TFT LCD	Satin-finish brushed stainless steel Laminated safety glass, non-reflective	10.4	640 x 480	XV-440-10TVB-1-50 139908	1 off  	2)
	Resistive touch 10.4" TFT LCD	Standard front with standard membrane (fully laminated)	10.4	640 x 480	XV-430-10TVB-1-10 139902	1 off  	-
	Infra-red touch 12.1" TFT LCD	Standard front with standard membrane Laminated safety glass, non-reflective	12.1	800 x 600	XV-440-12TSB-1-10 139911	1 off  	-
	Infra-red touch 12.1" TFT LCD	Four-hole front with standard membrane Laminated safety glass, non-reflective	12.1	800 x 600	XV-440-12TSB-1-20 139913	1 off  	1)
	Infra-red touch 12.1" TFT LCD	Satin-finish brushed stainless steel Laminated safety glass, non-reflective	12.1	800 x 600	XV-440-12TSB-1-50 139915	1 off  	2)
	Resistive touch 12.1" TFT LCD	Standard front with standard membrane (fully laminated)	12.1	800 x 600	XV-430-12TSB-1-10 139909	1 off  	-
	Infra-red touch 15" TFT LCD	Standard front with standard membrane Laminated safety glass, non-reflective	15	1024 x 768	XV-460-15TXB-1-10 139916	1 off  	-
	Infra-red touch 15" TFT LCD	Four-hole front with standard membrane Laminated safety glass, non-reflective	15	1024 x 768	XV-460-15TXB-1-20 139917	1 off  	1)
	Infra-red touch 15" TFT LCD	Satin-finish brushed stainless steel Laminated safety glass, non-reflective	15	1024 x 768	XV-460-15TXB-1-50 139918	1 off  	-

Instructions

1) Not for new applications.

2) Approved for II 2G Ex px II IP5x (ATEX 94/9/EC):

Zone 1, Category 2G (Only for flush-mounting in a pressurized enclosure!)

Max. permissible excess pressure: 10 mbar continuous.)

Zone 2, Category 3G (Only for flush-mounting in a pressurized enclosure!)

Max. permissible excess pressure: 10 mbar continuous.)

Information relevant for export to North America

Product Standards

UL 60950-01; cUL; IEC/EN 61131-2; CE marking

E208621

NWGQ02, NWGQ08

UL report applies to both US and Canada

-

UL Recognized, certified by UL for use in Canada

The investigated Pollution Degree is: 2

Proper bonding to the end-product main protective earthing
termination is: Required

The following end-product enclosures are required: Fire, Electrical

The unit must be supplied via a SELV source.

The provided Ethernet Connection is only allowed to connect to
inhouse networks.

IEC: IP65, UL/CSA Type: -

Degree of Protection



Description	For use with	Part No. Article No.	Price See price list	Std. pack	Information relevant for export to North America
Windows CE licenses					
License for Windows CE 3.0 incl. license label	XV-2... XVH-3... XV-4... XVS-4...	LIC-OS-CE30 140405		1 off  	UL/CSA certification not required
License for Windows CE 5.0 Core incl. license label		LIC-OS-CE50-C 140406			
License for Windows CE 5.0 Professional Plus incl. license label		LIC-OS-CE50-PP 140408			
Memory cards					
SD memory card with min. 128 MByte Without operating system	XV-1...	MEMORY-SD-A1-S 139807		1 off  	UL/CSA certification not required
Compact flash with min. 128 MByte Without operating system	XV-2... XVH-3... XV-4... XVS-4...	MEMORY-CF-A1-S 139528			
Compact flash with min. 128 MByte Windows CE 3.0 preinstalled Without Windows license (license required (LIC-OS-CE30))	XV-2... XVH-3... XV-4... XVS-4...	OS-FLASH-A1-S 140366			
Compact flash with min. 128 MByte Windows CE 5.0 Core preinstalled Without Windows license (license required (LIC-OS-CE 50-C))		OS-FLASH-A1-C 140368			
XV license product certificates					
License product certificate PLC with license label COMPACT	XV-1...-B... XV-1...-D...	LIC-PLC-MXP-COMPACT 142581		1 off  	UL/CSA certification not required
License product certificate PLC with license label LIGHT	XV-2...-57BAS... XV-2...-57CNN...	LIC-PLC-MXP-LIGHT 140388			
License product certificate PLC with license label SMALL	XV-2...-57MPN... XV-4...-57... XV-4...-84... XVS-4...-57... XVS-4...-84...	LIC-PLC-MXP-SMALL 140389			
License product certificate PLC with license label MEDIUM	XV-4...-10... XV-4...-12... XV-4...-15... XVS-4...-10... XVS-4...-12... XVS-4...-15...	LIC-PLC-MXP-MEDIUM 140390			
License product certificate 40 POINTS	XV-1... XV-2...	LIC-OPT-1ST-LEVEL 140391			
License product certificate 80 POINTS	XVH-3... XV-4... XVS-4... XVM-4...	LIC-OPT-2ND-LEVEL 140392			
License product certificate 160 POINTS		LIC-OPT-3RD-LEVEL 140393			
Additional fixing brackets					
4 mounting brackets with grub screw	XVH-3... XV-4... XVS-4...	ACCESSORIES-HKS-IP65 139809		1 off  	UL/CSA certification not required
100 mounting brackets with grub screw		ACCESSORIES-HKS-IP65-100 139810			



HPL14013EN

Description	For use with	Part No. Article No.	Price See price list	Std. pack	Information relevant for export to North America
Standard accessories					
Supplied as standard with devices					
Device accessories as replacement for insulated devices: 8 mounting brackets with grub screw for flush mounting 1 sealing profile for flush mounting device 1 power supply plug 1 touch pen	XV-1... XV-2...	ACCESSORIES-TP-57-KG-1 139837		1 off 	UL/CSA certification not required
Device accessories as replacement for 5.7" devices with resistive touch and metal front: 4 mounting brackets with grub screw for flush mounting 1 sealing profile for flush mounting device 1 power supply plug 1 touch pen	XVH-330... XV-432-57... XV-450-57... XVS-430-57... XVS-450-57...	ACCESSORIES-TP-57-RES-1 139827			
Device accessories as replacement for 5.7" devices with infrared touch and standard front: 4 mounting brackets with grub screw for flush mounting 1 sealing profile for flush mounting device 1 power supply plug	XVH-34... XV-442-57... XV-460-57... XVS-440-57... XVS-460-57...	ACCESSORIES-TP-57-IR-1¹⁾ 139828			
Device accessories as replacement for 5.7" devices with infrared touch and stainless steel front: 8 mounting brackets with grub screw for flush mounting 1 seal for flush mounting device 1 power supply plug	XVH-340-57...-50 XV-442-57...-50 XV-460-57...-50	ACCESSORIES-TP-57-EST-1 139830			
Device accessories as replacement for 10.4" and 12.1" devices with resistive touch: 6 mounting brackets with grub screw for flush mounting 1 sealing profile for flush mounting device 1 power supply plug 1 touch pen	XV-430-10... XV-430-12... XVS-430-10... XVS-430-12...	ACCESSORIES-TP-10/12-RES-1 139831			UL/CSA certification not required
Device accessories as replacement for 10.4", 12.1" and 15" devices with infrared touch: 8 mounting brackets with grub screw for flush mounting 1 sealing profile for flush mounting device 1 power supply plug	XV-440-10... XV-440-12... XV-440-15... XVS-440-10... XVS-440-12... XVS-460-15... XP-7...-10... XP-7...-12... XP-7...-15...	ACCESSORIES-TP-15-IR-1 139843			
Communication cards					
Protocols for communication cards → Page 14/14					
Multiple protocol card	XV-4...	COM-MPB1-TP 139850		1 off 	UL/CSA certification refer to main component information
Multiple protocol card MPI		COM-MPB2-TP 139847			
PROFIBUS-DP master (12 MBaud)		COM-DPM-MC2 139853			
PROFIBUS-DP slave (12 MBaud)		COM-PDP-TP 139849			
EIB (3rd release)		COM-EIB2-TP 139852			
Accessories for Mobile Panel					
Wall mount with cable holder	XVM-4...	KETOP-WB095 139999	1 off 	UL/CSA certification not required	
Switch box outside control panel IP65		KETOP-CB211 140002	1 off	–	
Switch box for installation inside control panel		JB001/ASET 140003	1 off	–	
Connection cable, 5 m		KETOP-TT050-MV1 140000	1 off 	UL/CSA certification not required	
Connection cable, 10 m		KETOP-TT100-MV1 140001			
Connection cable, 15 m		KETOP-TT150-MV1 140005			
Jumper plug for emergency switching off		KETOP-BC001 140004			
Spare keys, 2 off	XVM-410... XVM-450...	KETOP-EKY001 140006			

Notes

¹⁾ XVH-340-57CAN-1-50, XV-442-57CQB-1-50 and XV-460-57TQB-1-50 have a special seal.

Engineering

Protocols for communication cards for panel XV400

For panels XV400, communications protocols are available through optional plug-in communication cards (No license products required):
Excerpt From the most common protocols, which are available for XV400 devices through optional plug-in communication cards:

Protocol	Required communication cards for XV400
EIB (3rd release)	COM-EIB2-TP
Matsushita FP series	COM-MPB1-TP / COM-MPB2-TP
Mitsubishi A series/F series	COM-MPB1-TP / COM-MPB2-TP
Moeller Suconet K	COM-MPB1-TP / COM-MPB2-TP
Omron C, H, or K series	COM-MPB1-TP / COM-MPB2-TP
PROFIBUS-DP master (12 Mbaud)	COM-DPM-MC2
PROFIBUS-DP slave (12 Mbaud)	COM-PDP-TP
Siemens MPI	COM-MPB2-TP
Telemecanique Unitelway new	COM-MPB1-TP / COM-MPB2-TP

To inquire about further protocols, contact your vendor.

Licensing for Panel XV...

The panels XV100, XV200, Xvh300, XV400, Xvs400 and Xvm400 are supplied with license points saved to the device. License points are required to be able to perform certain functions with the device:

- XSOFT-CODESYS-2 runtime for the PLC function (not possible with XV-102-A...,Xvh300 and Xvm400)
- Runtime for the visualization (GALILEO or EPAM)
- Tools (e. g. CE Telediag, S7 PG Router)
- Communication (e.g. Ethernet, CANopen, Siemens MPI)

Number of license points supplied with standard devices:

- 140 license points: XV100 (without PLC function), XV200, Xvh300, XV400, Xvs400
- 240 license points: XV100 with PLC function
- 260 licence points: Xvm400

If the device does not contain enough license points for the required functions or to add the PLC function to the HMI, you must purchase additional license points. To do this you need one or more license product certificates. The following are available:

- License product certificates for the PLC function: To enable the PLC function (XSOFT-CODESYS-2) special license product certificates are required. These contain a license label for the device type, which must be applied to the device for legal reasons.
- License product certificates for visualization, communication and tools

Determining required license points

For the visualization and tools and communication features used, add the license points required for each function. Communication connections to several devices with the same protocol must be counted only once. From this total, subtract the points already contained on the devices (e.g. 140 points). The difference is the number of license points that you must install for communication protocols and tools through license product certificates.

Table: Required license points for runtime and tools

Visualization/Tools	Required on-board interface	Licence points
GALILEO-Runtime	None	100
EPAM runtime	None	100
XSOFT-CODESYS-2 runtime (PLC function)	None	100
XSOFT-CODESYS-2 runtime (PLC function and TargetVisu function)	None	200
CE Telediag	RS232	40
S7 PG Router	Ethernet and PROFIBUS	80
CAN Monitor	CAN	0
Domain Server	Ethernet	80

Table: Required license points for communication through on-board interface

Manufacturer	PLC	Protocol	Required on-board interface	Licence points XSOFT-CODE-SYS-2	Licence points GALILEO	Licence points EPAM
Eaton	XV with PLC function		Local	-	0	0
	XV with PLC function		Ethernet	0	40	0
		CANopen, master	CAN	0	-	-
		CANopen, PDO	CAN	0	40	-
		CANopen, SDO	CAN	0	40	-
		XV200 DP master (1.5 MBaud)	PROFIBUS	40	-	-
		XV100/XVS400 DP master (1.5 Mbaud)	PROFIBUS	0	-	-
		Modbus RTU	RS232	0	40	-
		Modbus TCP	Ethernet	0	80	-
	CoDeSys		Ethernet	0	40	0
A. Bradley	Logix	DF1	RS232	-	120	-
	Logix	Ethernet/IP	Ethernet	-	120	-
	MicroLogix	SLC5/03 MicroLogix DF1	RS232	-	40	-
Beckhoff	TwinCAT	ADS	Ethernet	-	80	-
	BC9000	ADS	Ethernet	-	80	-
HIMA	HIMatrix	Modbus TCP	Ethernet	-	80	-
Mitsubishi	PG-AX/PG-FX		RS232	-	40	-
Eaton	easy500/easy700		RS232	-	40	-
	easy800/MFD-Titan		RS232	-	40	-
	PS4		RS232	-	40	-
	XC100, XC200		CAN	-	40	-
	XC100, XC200		Ethernet	-	40	-
	PS4	Suconet K (to XVH342-57SKS)	Suconet K	-	0	-
Siemens	S7	Industrial Ethernet	Ethernet	-	80	-
	S7	MPI	PROFIBUS	-	40	-
	S7	PROFIBUS-DP (1.5 Mbaud) S7 default profile	PROFIBUS	-	40	-
	S7-200	PPI	PROFIBUS	-	40	-
	-	XVM400 keypad	Local	-	40	-

- Communication currently not available

To inquire about further protocols, contact your vendor.



Communication cards for MICRO PANEL XV400

For panels XV400 further communications protocols are available through optional plug-in communication cards (No license products required). Depending on the required functionality the following license product certificates are available (→ XV accessories):


Licensing examples

HMI application: XV100, XV200, XVS400

Visualization, communication

Visualization (GALILEO)	100	Points
Communication MPI	40	Points
Communication CoDeSys external	40	Points
Total	180	Points
Contained in device on delivery	-140	Points
Additionally required points for communication	40	Points
PLC		
PLC application	No	

Required license product certificates:
1 x LIC-OPT-1ST-LEVEL (40 points)

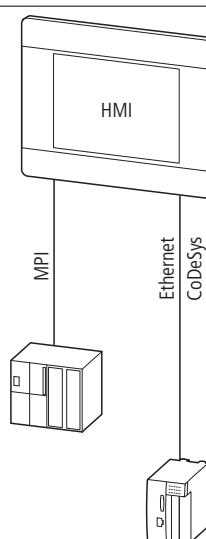

HMI application: XV100, XV200, XVS400, with additional software S7 PG Router


Visualization, communication

Visualization (GALILEO)	100	Points
Communication MPI	40	Points
S7 PG Router	80	Points
Total	220	Points
Contained in device on delivery	-140	Points
Additionally required points for communication	80	Points

PLC

PLC application	No
-----------------	----

Required license product certificates:
1 x LIC-OPT-2ND-LEVEL (80 points)

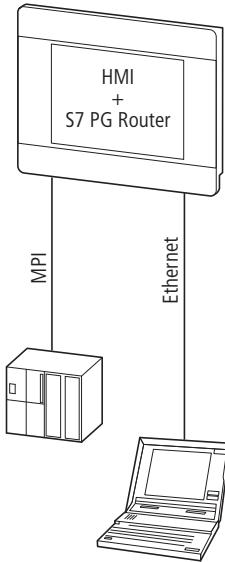**HMI-PLC Application: XV100**


Visualization, communication

Visualization (GALILEO)	100	Points
Communication HMI-PLC local	0	Points
Communication CANopen or PROFIBUS-DP master (XSOFT-CODESYS-2)	0	Points
Total	100	Points
Contained in device on delivery	-140	Points
Additionally required points for communication	0	Points

PLC

PLC application	100	Points
-----------------	-----	--------

Required license product certificates:
1 x LIC-PLC-MXP-COMPACT (100 points)

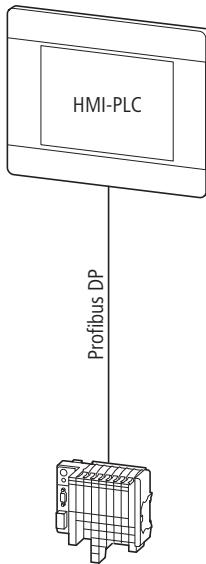


For device versions XV-102-...-PLC license LIC-PLC-MXP-COMPACT is included with the device as standard (the device therefore has 240 license points).

HMI-PLC Application: XV400 10.4"

Visualization, communication		Points
Visualization (GALILEO)	100	Points
Communication HMI-PLC local	0	Points
Communication Modbus TCP client (GALILEO)	80	Points
Communication CANopen (XSOFT-CODESYS-2)	0	Points
Total	180	Points
Contained in device on delivery	-140	Points
Additionally required points for communication	40	Points
PLC		
PLC application	100	Points

Required license product certificates:

- 1 x LIC-OPT-1ST-LEVEL (40 points)
- 1 x LIC-PLC-MXP-MEDIUM (100 points)

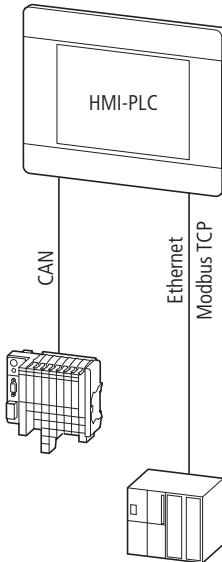


For device versions XV-102-...-PLC license LIC-PLC-MXP-COMPACT is included with the device as standard (the device therefore has 240 license points).

Redeeming a license product certificate (XV100, XV200, XV400, XVS400, XVH300)

- 1 Order the required license product certificate.
- 2 Keep the following information available:
 - Certificate number of license product certificate
 - The serial number of your device
 - Your e-mail address
- 3 On the Micro Innovation website (www.microinnovation.com/license), select menu item “Validate License” and click [Start Licensing].
- 4 In the new window that opens, enter your certificate number. The license product certificate is associated with a specific device through its serial number. The website generates a license code, which is immediately shown on the web page.
- 5 Enter the license code in your device:
 - On the device, select [Start] > [Programs] > [Control Panel].
 - Double-click the Licence icon.
 - Enter the license code with the License Administrator tool (Change Licence).
- 6 Restart the device.

After the device has been restarted the new license points are available.

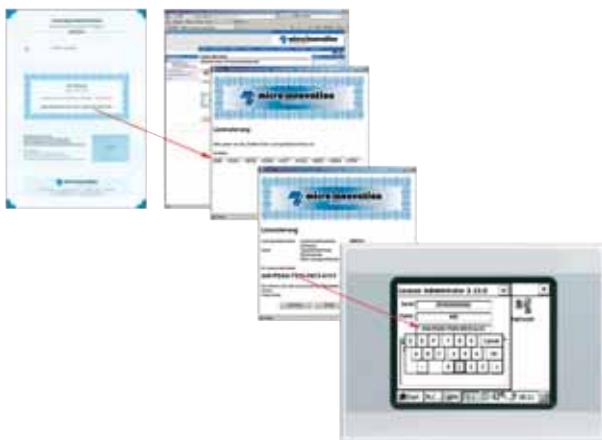**Redeeming a license product certificate for XVM400 devices**

Follow the procedure described in document M002379 (Mobile PANEL XVM400), which you can find on the Micro Innovation website under “Downloads”.

	XV-102-A...-35MQR-10	XV-102-B...-35MQR-10-PLC
Technical data		
Display		
Screen diagonal/type	3.5" TFT LCD (monochrome)	3.5" TFT LCD (monochrome)
Resolution	QVGA (320 × 240 pixels or 240 × 320 pixels in portrait format)	QVGA (320 × 240 pixels or 240 × 320 pixels in portrait format)
Visible screen area	70 mm x 53 mm	70 mm x 53 mm
Color resolution (grayscale or color)	32 grey levels	32 grey levels
Contrast ratio	Normally 300:1	Normally 300:1
Brightness	Normally 250 cd/m ²	Normally 250 cd/m ²
Backlight	LED, dimmable via software	LED, dimmable via software
Lifespan of backlight	Normally 40000 h	Normally 40000 h
Resistive touch protective screen	Touch sensor (glass with membrane)	Touch sensor (glass with membrane)
Operation		
Technology	Resistive touch, 4-conductor	Resistive touch, 4-conductor
System		
Processor	RISC, 32 bit, 400 MHz	RISC, 32 bit, 400 MHz
Internal memory		
DRAM (OS, program and data memory)	64 MByte	64 MByte
NAND FLASH (can be used for data backup)	Approx. 128 Byte available	Approx. 128 Byte available
NVRAM (Retain data)	–	Approx. 32 kByte available
External memory		
SD Memory Card Slot	SDA Specification 1.00	SDA Specification 1.00
Real-time clock (battery backup)		
Battery	Zero maintenance	Zero maintenance
Backup time at zero voltage	Normally 10 years	Normally 10 years
Operating system	Windows CE	Windows CE
Engineering		
Visualization software	GALILEO/EPAM	GALILEO/EPAM
PLC programming software	–	XSOFT-CODESYS-2
Interfaces, communication		
Ethernet	100Base-TX/10Base-T	100Base-TX/10Base-T
USB Host	–	–
USB device	USB 2.0, not isolated	USB 2.0, not isolated
Part No.	...A0... ...A2... ...A3... ...A4... ...A5...	...B0... ...B3... ...B4... ...B5... ...B6... ...B8...
System Port (RS232)	– – ● ¹⁾ – ● ¹⁾	– ● ¹⁾ – ● ¹⁾ – –
CAN	– – – ● ²⁾ ● ²⁾ –	– – – ● ²⁾ ● ²⁾ –
PROFIBUS	– ● ³⁾ – – –	– – – ● ³⁾ – –
RS485	– – – ● ⁴⁾ –	– – – ● ⁴⁾ – ● ⁴⁾ ● ⁴⁾
Power supply		
Nominal voltage	24 V DC SELV (safety extra low voltage)	24 V DC SELV (safety extra low voltage)
Permissible voltage	R.m.s.: 19.2 – 30.0 V DC (rated operating voltage -20 %/+25 %) Absolute with ripple: 18.0 – 31.2 V DC Battery operation: 18.0 – 31.2 V DC (rated operating voltage -25 %/+30 %) 35 V DC for a duration of < 100 ms	R.m.s.: 19.2 – 30.0 V DC (rated operating voltage -20 %/+25 %) Absolute with ripple: 18.0 – 31.2 V DC Battery operation: 18.0 – 31.2 V DC (rated operating voltage -25 %/+30 %) 35 V DC for a duration of < 100 ms
Voltage dips	10 ms from nominal voltage (24 V DC), 5 ms from undervoltage (20.4 V DC)	10 ms from nominal voltage (24 V DC), 5 ms from undervoltage (20.4 V DC)
Input power	Max. 5 W	Max. 5 W
Protection against polarity reversal	Yes	Yes
Fuse	Yes (fuse not accessible)	Yes (fuse not accessible)
Potential isolation	No	No
General		
Front design	Standard membrane (fully enclosed)	Standard membrane (fully enclosed)
Degree of protection		
Front	IP65	IP65
Rear	IP20	IP20
Approvals		
Approvals	cUL	cUL
Explosion protection (According to ATEX 94/9/EC)	II 3D Ex II T70°C IP5x: Zone 22, Category 3D	II 3D Ex II T70°C IP5x: Zone 22, Category 3D
Applied standards and directives		
EMC (relevant for CE)	EN 61000-6-2, EN 61000-6-4, EN 61131-2	EN 61000-6-2, EN 61000-6-4, EN 61131-2
Explosion protection (relevant for CE)	EN 60079-0, EN 61241-1, EN 13463	EN 60079-0, EN 61241-1, EN 13463
Safety	EN 60950/UL 60950	EN 60950/UL 60950
Product standards	EN 50178, EN 61131-2	EN 50178, EN 61131-2
Weight	Approx. 0.3 kg	Approx. 0.3 kg
Environmental Conditions		
Temperature		
Operation	0 – 50°C	0 – 50°C
Storage/transport	-20 – 60°C	-20 – 60°C
Relative humidity	10 - 95%, non-condensing	10 - 95%, non-condensing
Impact resistance	To IEC 68-2-27	To IEC 68-2-27
Vibration	To IEC 68-2-6	To IEC 68-2-6
Notes	¹⁾ RS232, not isolated (D-sub 9-pin, UNC)	
	²⁾ CAN, not isolated (D-sub 9-pin, UNC)	

XV-102B...-35TQR-10	XV-102-B...-35TQR-10-PLC	XV-102-D...-57TVR-10	XV-102-D...70TWR-10...
Visualization			
3.5" TFT LCD (color)	3.5" TFT LCD (color)	5.7" TFT LCD (color)	7" TFT LCD (color)
QVGA (320 × 240 pixels or 240 × 320 pixels in portrait format)	QVGA (320 × 240 pixels or 240 × 320 pixels in portrait format)	VGA (640 × 480 pixels or 480 × 640 pixels in portrait format)	WVGA (800 × 480 pixels or 480 × 800 pixels in portrait format)
70 mm x 53 mm	70 mm x 53 mm	115 mm x 86 mm	152 mm x 91 mm
32 grey levels	64 k Colors	64 k Colors	64 k Colors
Normally 300:1	Normally 300:1	Normally 300:1	Normally 300:1
Normally 250 cd/m ²	Normally 250 cd/m ²	Normally 250 cd/m ²	Normally 250 cd/m ²
LED, dimmable via software	LED, dimmable via software	LED, dimmable via software	LED, dimmable via software
Normally 40000 h	Normally 40000 h	Normally 40000 h	Normally 40000 h
Touch sensor (glass with membrane)	Touch sensor (glass with membrane)	Touch sensor (glass with membrane)	Touch sensor (glass with membrane)
Resistive touch, 4-conductor	Resistive touch, 4-conductor	Resistive touch, 4-conductor	Resistive touch, 4-conductor
RISC, 32 bit, 400 MHz	RISC, 32 bit, 400 MHz	RISC, 32 bit, 400 MHz	RISC, 32 bit, 400 MHz
64 MByte	64 MByte	64 MByte	64 MByte
Approx. 128 Byte available	Approx. 128 Byte available	Approx. 128 Byte available	Approx. 128 Byte available
–	Approx. 32 kBByte available	Approx. 32 kBByte available	Approx. 32 kBByte available
SDA Specification 1.00	SDA Specification 1.00	SDA Specification 1.00	SDA Specification 1.00
Zero maintenance	Zero maintenance	Zero maintenance	Zero maintenance
Normally 10 years	Normally 10 years	Normally 10 years	Normally 10 years
Windows CE	Windows CE	Windows CE	Windows CE
GALILEO/EPAM	GALILEO/EPAM	GALILEO/EPAM	GALILEO/EPAM
XSOFT-CODESYS-2	XSOFT-CODESYS-2	XSOFT-CODESYS-2	XSOFT-CODESYS-2
100Base-TX/10Base-T	100Base-TX/10Base-T	100Base-TX/10Base-T	100Base-TX/10Base-T
–	–	USB 2.0 (1.5 - 12 Mbit/s), not isolated	USB 2.0, not isolated
USB 2.0, not isolated	USB 2.0, not isolated	USB 2.0, not isolated	USB 2.0, not isolated
...B0... ...B3... ...B4... ...B5... ...B6... ...B8...	...B0... ...B3... ...B4... ...B5... ...B6... ...B8...	...D0... ...D6... ...D8... ...D6... ...D8... ...D8...	...D0... ...D6... ...D8... ...D6... ...D8... ...D8...
– – ● ¹⁾ – ● ¹⁾	– ● ¹⁾ – ● ¹⁾ – –	● ¹⁾ ● ¹⁾ ● ¹⁾ ● ¹⁾ ● ¹⁾	● ¹⁾ ● ¹⁾ ● ¹⁾ ● ¹⁾ ● ¹⁾
– – – ● ²⁾ ● ²⁾ –	– – – ● ²⁾ ● ²⁾ –	– – – ● ²⁾ ● ²⁾ –	– – – ● ²⁾ ● ²⁾ –
– ● ³⁾ – – –	– – – – ● ³⁾ – –	– – – – ● ³⁾ – –	– – – – ● ³⁾ – –
– – – ● ⁴⁾ –	– – – ● ⁴⁾ – ● ⁴⁾ ● ⁴⁾	– – – ● ⁴⁾ – ● ⁴⁾ ● ⁴⁾	– – – ● ⁴⁾ – ● ⁴⁾ ● ⁴⁾
24 V DC SELV (safety extra low voltage)	24 V DC SELV (safety extra low voltage)	24 V DC SELV (safety extra low voltage)	24 V DC SELV (safety extra low voltage)
R.m.s.: 19.2 – 30.0 V DC (rated operating voltage -20 %/+25 %)	R.m.s.: 19.2 – 30.0 V DC (rated operating voltage -20 %/+25 %)	R.m.s.: 19.2 – 30.0 V DC (rated operating voltage -20 %/+25 %)	R.m.s.: 19.2 – 30.0 V DC (rated operating voltage -20 %/+25 %)
Absolute with ripple: 18.0 – 31.2 V DC	Absolute with ripple: 18.0 – 31.2 V DC	Absolute with ripple: 18.0 – 31.2 V DC	Absolute with ripple: 18.0 – 31.2 V DC
Battery operation: 18.0 – 31.2 V DC (rated operating voltage -25 %/+30 %)	Battery operation: 18.0 – 31.2 V DC (rated operating voltage -25 %/+30 %)	Battery operation: 18.0 – 31.2 V DC (rated operating voltage -25 %/+30 %)	Battery operation: 18.0 – 31.2 V DC (rated operating voltage -25 %/+30 %)
35 V DC for a duration of < 100 ms	35 V DC for a duration of < 100 ms	35 V DC for a duration of < 100 ms	35 V DC for a duration of < 100 ms
10 ms from nominal voltage (24 V DC), 5 ms from undervoltage (20.4 V DC)	10 ms from nominal voltage (24 V DC), 5 ms from undervoltage (20.4 V DC)	Max. 5 W	Max. 10 W
Max. 5 W	Max. 5 W	Yes	Yes
Yes	Yes	No	No
Yes (fuse not accessible)	Yes (fuse not accessible)	Standard membrane (fully enclosed)	Standard membrane (fully enclosed)
No	No	Standard membrane (fully enclosed)	Standard membrane (fully enclosed)
IP65	IP65	IP65	IP65
IP20	IP20	IP20	IP20
cUL	cUL	cUL	cUL
II 3D Ex II T70°C IP5x: Zone 22, Category 3D	II 3D Ex II T70°C IP5x: Zone 22, Category 3D	II 3D Ex II T70°C IP5x: Zone 22, Category 3D	II 3D Ex II T70°C IP5x: Zone 22, Category 3D
EN 61000-6-2, EN 61000-6-4, EN 61131-2	EN 61000-6-2, EN 61000-6-4, EN 61131-2	EN 61000-6-2, EN 61000-6-4, EN 61131-2	EN 61000-6-2, EN 61000-6-4, EN 61131-2
EN 60079-0, EN 61241-1, EN 13463	EN 60079-0, EN 61241-1, EN 13463	EN 60079-0, EN 61241-1, EN 13463	EN 60079-0, EN 61241-1, EN 13463
EN 60950/UL 60950	EN 60950/UL 60950	EN 60950/UL 60950	EN 60950/UL 60950
EN 50178, EN 61131-2	EN 50178, EN 61131-2	EN 50178, EN 61131-2	EN 50178, EN 61131-2
Approx. 0.3 kg	Approx. 0.3 kg	Approx. 0.6 kg	Approx. 0.6 kg
0 – 50°C	0 – 50°C	0 – 50°C	0 – 50°C
-20 – 60°C	-20 – 60°C	-20 – 60°C	-20 – 60°C
10 - 95%, non-condensing	10 - 95%, non-condensing	10 - 95%, non-condensing	10 - 95%, non-condensing
To IEC 68-2-27	To IEC 68-2-27	To IEC 68-2-27	To IEC 68-2-27
To IEC 68-2-6	To IEC 68-2-6	To IEC 68-2-6	To IEC 68-2-6
¹⁾ PROFIBUS, not isolated, max. 1.5 MBit/s (D-sub 9-pin socket, UNC)			
²⁾ RS485, not isolated (D-sub 9-pin, UNC)			

	XV-230-57CNN-1-10	XV-230-57MPN-1-10	XV-232-57BAS-1-10	XV-252-57CNN-1-10	XV-252-57MPN-1-10
Display					
Screen diagonal/type	5.7" FSTN LCD (monochrome display)			5.7" CSTN LCD (Color display)	
Resolution	QVGA (320 × 240 pixels or 240 × 320 pixels in portrait format)				
Visible screen area	115 mm x 86 mm				
Color resolution (grayscale or color)	256 grey levels	256 grey levels	256 grey levels	256 colors	256 colors
Contrast ratio	Normally 10:1	Normally 10:1	Normally 10:1	Normally 35:1	Normally 35:1
Brightness	Normally 150 cd/m ²				
Backlight	1 x CCFL, dimmable via software				
Lifespan of backlight	Normally 50000 h				
Resistive touch protective screen	Touch sensor (glass with membrane)				
Operation					
Technology	Resistive touch, 4-conductor				
System					
Processor	RISC, 32-bit, 200 MHz				
Internal memory					
DRAM (OS, program and data memory)	32 MByte	32 MByte	32 MByte	32 MByte	32 MByte
FLASH (can be used for data backup)	Approx. 1.5 MByte available				
NVRAM (Retain data)	Approx. 100 Byte available				
External memory					
CF slot	1 x CompactFlash card type I for operating system, programs and data				
Real-time clock (battery backup)					
Battery	Zero maintenance	Zero maintenance	Zero maintenance	Zero maintenance	Zero maintenance
Backup time at zero voltage	Normally 10 years	Normally 10 years	Normally 10 years	Normally 10 years	Normally 10 years
Operating system	Windows CE	Windows CE	Windows CE	Windows CE	Windows CE
Engineering					
Visualization software	GALILEO/EPAM	GALILEO/EPAM	GALILEO/EPAM	GALILEO/EPAM	GALILEO/EPAM
PLC programming software	XSOFT-CODESYS-2	XSOFT-CODESYS-2	XSOFT-CODESYS-2	XSOFT-CODESYS-2	XSOFT-CODESYS-2
Interfaces, communication					
Ethernet	100Base-TX/10Base-T				
System port	–	–	RS232, not isolated (D-sub 9-pin, UNC)		
CAN	CAN, not isolated (D-sub 9-pin, UNC)	–	–	CAN, not isolated (D-sub 9-pin, UNC)	–
PROFIBUS	–	PROFIBUS, not isolated, max. 1.5 MBit/s (D-sub 9-pin socket, UNC)	–	–	PROFIBUS, not isolated, max. 1.5 MBit/s (D-sub 9-pin, UNC)
USB device	USB 1.1, not isolated				
Power supply					
Nominal voltage	24 V DC SELV (safety extra low voltage)				
Permissible voltage	R.m.s.: 19.2 – 30.0 V DC (rated operating voltage -20 %/+25 %) Absolute with ripple: 18.0 – 31.2 V DC Battery operation: 18.0 – 31.2 V DC (rated operating voltage -25 %/+30 %) 35 V DC for a duration of < 100 ms				
Voltage dips	20 ms from nominal voltage (24 V DC), 10 ms from undervoltage (20.4 V DC)				
Input power	Max. 8 W	Max. 8 W	Max. 8 W	Max. 8 W	Max. 8 W
Protection against polarity reversal	Yes	Yes	Yes	Yes	Yes
Fuse	Yes (zero maintenance)	Yes (zero maintenance)	Yes (zero maintenance)	Yes (zero maintenance)	Yes (zero maintenance)
Potential isolation	No	No	No	No	No



	XV-230-57CNN-1-10	XV-230-57MPN-1-10	XV-232-57BAS-1-10	XV-252-57CNN-1-10	XV-252-57MPN-1-10
General					
Front design	Standard membrane	Standard membrane	Standard membrane	Standard membrane	Standard membrane
Degree of protection					
Front	IP65	IP65	IP65	IP65	IP65
Rear	IP20	IP20	IP20	IP20	IP20
Approvals					
Approvals	cUL	cUL	cUL	cUL	cUL
Explosion protection (According to ATEX 94/9/EC)	II 3D Ex II T70°C IP5x: Zone 22, Category 3D				
Applied standards and directives					
EMC (relevant for CE)	EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, EN 61131-2				
Explosion protection (relevant for CE)	EN 60079-0, EN 61241-1, EN 13463				
Safety	EN 60950/UL 60950	EN 60950/UL 60950	EN 60950/UL 60950	EN 60950/UL 60950	EN 60950/UL 60950
Product standards	EN 50178, EN 61131-2				
Weight	Approx. 0.7 kg	Approx. 0.7 kg	Approx. 0.7 kg	Approx. 0.7 kg	Approx. 0.7 kg
Environmental Conditions					
Temperature					
Operation	0 – 50°C	0 – 50°C	0 – 50°C	0 – 50°C	0 – 50°C
Storage/transport	-20 – 60°C	-20 – 60°C	-20 – 60°C	-20 – 60°C	-20 – 60°C
Relative humidity	10 - 95%, non-condensing				
Impact resistance	To IEC 68-2-27	To IEC 68-2-27	To IEC 68-2-27	To IEC 68-2-27	To IEC 68-2-27
Vibration	To IEC 68-2-6	To IEC 68-2-6	To IEC 68-2-6	To IEC 68-2-6	To IEC 68-2-6



MFD4-5-XRC-30	
Display	
Screen diagonal/type	5.7" TFT Color display
Resolution	QVGA (320 x 240 pixels)
Visible screen area	118 mm x 89 mm
Color resolution (grayscale or color)	32 K
Contrast ratio	Normally 350:1
Brightness	Normally 500 cd/m ²
Backlight	1 x CCFL, dimmable via software
Lifespan of backlight	Normally 50000 h
Resistive touch protective screen	Touch sensor (glass with membrane)
Operation	
Technology	Resistive touch, 4-conductor
System	
Processor	Risc, 32-bit 130 MHz
Internal memory	
DRAM (OS, program and data memory)	4 MByte
FLASH (can be used for data backup)	512 kByte
NVRAM (Retain data)	32 kByte
External memory	
Slot	1 x MMC for operating system, programs and data
Real-time clock (battery backup)	
Battery	Lithium, 1/2AA(3.6V)
Backup time at zero voltage	Normally 5 years
Operating system	Windows CE
Engineering	
Visualization software	XSOFT-CODESYS-2
PLC programming software	XSOFT-CODESYS-2
Interfaces, communication	
Ethernet	100Base-TX/10Base-T
System port	RS232, not isolated (D-sub 9-pin, UNC)
CAN	CAN, galvanically isolated (D-sub 9-pin, UNC)
PROFIBUS	–
USB device	–
Power supply	
Nominal voltage	24 V DC SELV (safety extra low voltage)
Permissible voltage	20.4 to 28.8 V DC, residual ripple ≤ 5 %
Voltage dips	Duration of dip to IEC/EN 61131-2: 10 ms
Input power	Max. 10 W
Protection against polarity reversal	Yes
Fuse	No
Potential isolation	No
General	
Enclosure	Metal
Front design	Seamless membrane
Degree of protection	
Front	IP65
Rear	IP20
Approvals	
Approvals	LR, GL, DNV,BV, ABS
Explosion protection (According to ATEX 94/9/EC)	II 3D Ex II T85°C IP5x: Zone 22, Category 3D
Applied standards and directives	
EMC (relevant for CE)	EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, EN 61131-2
Explosion protection (relevant for CE)	EN 60079-0, EN 61241-1, EN 13463
Safety	EN 60950
Product standards	EN 50178, EN 61131-2
Weight	Approx. 1.3 kg
Environmental Conditions	
Temperature	0 – 50°C
Operation	- 20 to 70 °C
Storage/transport	10 – 95 %, non-condensing
Relative humidity	15 g/11 ms
Impact resistance	10 to 57 Hz ± 0.075 mm; 57 to 150 Hz ± 1.0 g
Vibration	

	XVM-430-65TVB-1-11	XVM-450-65TVB-1-11	XVM-410-65TVB-1-11
Display			
Screen diagonal/type	6.5" TFT LCD	6.5" TFT LCD	6.5" TFT LCD
Resolution	VGA (640 x 480 pixel)	VGA (640 x 480 pixel)	VGA (640 x 480 pixel)
Visible screen area	132 mm x 99 mm	132 mm x 99 mm	132 mm x 99 mm
Color resolution (grayscale or color)	64k Colors	64k Colors	64k Colors
Backlight	2 CCFT cold cathode tubes	2 CCFT cold cathode tubes	2 CCFT cold cathode tubes
Lifespan of backlight	Normally 50000 h	Normally 50000 h	Normally 50000 h
Resistive touch protective screen	Touch sensor (glass with membrane)	Touch sensor (glass with membrane)	Touch sensor (glass with membrane)
Operation			
Technology	Resistive touch	Resistive touch	Resistive touch
Keypad	31 membrane keys with tactile feedback, 4 status LEDs	31 membrane keys with tactile feedback, 4 status LEDs	31 membrane keys with tactile feedback, 4 status LEDs
Operating elements	2 acknowledgement keys (3-stage, 2-circuit), externally wired Emergency switching off button (2-circuit), externally wired	2 acknowledgement keys (3-stage, 2-circuit), externally wired Emergency switching off button (2-circuit), externally wired Keyswitch (3-position), internally wired Electronic hand wheel, internally wired	2 acknowledgement keys (3-stage, 2-circuit), externally wired Emergency switching off button (2-circuit), externally wired Keyswitch (3-position), internally wired Electronic hand wheel, internally wired
System			
Processor	RISC, 32 bit, 400 MHz	RISC, 32 bit, 400 MHz	RISC, 32 bit, 400 MHz
Internal memory			
DRAM (OS, program and data memory)	Min. 64 MByte	Min. 64 MByte	Min. 64 MByte
FLASH	Min. 64 MByte	Min. 64 MByte	Min. 64 MByte
NVRAM (Retain data)	—	—	—
Operating system	Windows CE	Windows CE	Windows CE
Engineering			
Visualization software	GALILEO	GALILEO	GALILEO
Interfaces, communication			
Ethernet	100Base-TX/10Base-T	100Base-TX/10Base-T	100Base-TX/10Base-T
RS232	RS232-C	RS232-C	RS232-C
USB Host	USB 1.1 (12 Mbit/s)	USB 1.1 (12 Mbit/s)	USB 1.1 (12 Mbit/s)
Power supply			
Nominal voltage	24 V DC	24 V DC	24 V DC
Permissible voltage	R.m.s.: 19.2 – 30.0 V DC	R.m.s.: 19.2 – 30.0 V DC	R.m.s.: 19.2 – 30.0 V DC
Voltage dips	≤ 10 ms	≤ 10 ms	≤ 10 ms
Input power	9.6 W	9.6 W	9.6 W
General			
Front design	Standard membrane Membrane keypad with tactile feedback	Standard membrane Membrane keypad with tactile feedback	Standard membrane Membrane keypad with tactile feedback
Degree of protection			
Front	IP65	IP65	IP65
Rear	IP65	IP65	IP65
Approvals			
Approvals	cUL (UL508)	cUL (UL508)	cUL (UL508)
Applied standards and directives			
Product standards	EN 50178, EN 61131-2	EN 50178, EN 61131-2	EN 50178, EN 61131-2
Weight	Approx. 1.3 kg	Approx. 1.3 kg	Approx. 1.3 kg
Environmental Conditions			
Temperature			
Operation	0 – 50°C	0 – 50°C	0 – 50°C
Storage/transport	-20 – 70°C	-20 – 70°C	-20 – 70°C
Relative humidity	5 - 95%, non-condensing	5 - 95%, non-condensing	5 - 95%, non-condensing
Shock (IEC 60068-2-27)	25 g/11ms	25 g/11ms	25 g/11ms
Vibration (IEC 60068-2-6)	10 Hz ≥ f > 57 Hz with 0.15 mm 9 Hz ≥ f > 150 Hz with 2 g	10 Hz ≥ f > 57 Hz with 0.15 mm 9 Hz ≥ f > 150 Hz with 2 g	10 Hz ≥ f > 57 Hz with 0.15 mm 9 Hz ≥ f > 150 Hz with 2 g



	XVH-340-57BAS-1-10	XVH-340-57CAN-1-10	XVH-340-57MPI-1-10
Display			
Screen diagonal/type	5.7" CSTN LCD (color)	5.7" CSTN LCD (color)	5.7" CSTN LCD (color)
Resolution			
Visible screen area	QVGA (320 × 240 pixels or 240 × 320 pixels in portrait format)	115 mm x 86 mm	115 mm x 86 mm
Color resolution (grayscale or color)	256 colors	256 colors	256 colors
Contrast ratio	Normally 35:1	Normally 35:1	Normally 35:1
Brightness	Normally 150 cd/m ²	Normally 150 cd/m ²	Normally 150 cd/m ²
Backlight	1 x CCFL, dimmable via software		
Lifespan of backlight	Normally 50000 h	Normally 50000 h	Normally 50000 h
Resistive touch protective screen	–	–	–
Infra-red touch protective screen	Laminated safety glass, non-reflective		
Operation			
Technology	Infra-red touch, 47 × 31 logic channels		
System			
Processor	RISC, 32-bit, 200 MHz	RISC, 32-bit, 200 MHz	RISC, 32-bit, 200 MHz
Internal memory			
DRAM (OS, program and data memory)	64 MByte	64 MByte	64 MByte
FLASH (can be used for data backup)	Approx. 1.5 MByte available	Approx. 1.5 MByte available	Approx. 1.5 MByte available
NVRAM (Retain data)	–	–	–
External memory			
CF slot	1 x CompactFlash card type I/II for operating system, programs and data		
Real-time clock (battery backup)			
Battery	Zero maintenance	Zero maintenance	Zero maintenance
Backup time at zero voltage	Normally 10 years	Normally 10 years	Normally 10 years
Operating system	Windows CE	Windows CE	Windows CE
Engineering			
Visualization software	GALILEO/EPAM	GALILEO/EPAM	GALILEO/EPAM
PLC programming software	–	–	–
Interfaces, communication			
Ethernet	100Base-TX/10Base-T	100Base-TX/10Base-T	100Base-TX/10Base-T
System port	–	–	–
Com Port	–	–	–
CAN	–	CAN, isolated (Sub-D 9-pin plug)	–
PROFIBUS	–	–	PROFIBUS galvanically isolated, max. 1.5 MBit/s (D-sub 9-pin socket, UNC)
USB device	USB 1.1, not isolated		
Power supply			
Nominal voltage	24 V DC SELV (safety extra low voltage)		
Permissible voltage	R.m.s.: 20.4 – 28.8 V DC (rated operating voltage -15 %/+20 %) Absolute with ripple: 19.2 – 30.0 V DC 35 V DC for a duration < 100 ms		
Voltage dips	20 ms from nominal voltage (24 V DC), 2 ms from undervoltage (20.4 V DC)		
Input power	Max. 16 W (normally 12 W)	Max. 16 W (normally 12 W)	Max. 16 W (normally 12 W)
Protection against polarity reversal	Yes	Yes	Yes
Fuse	Yes (fuse not accessible)		
Potential isolation	No (0V connection to housing potential)		

XVH-342-57SKS-1-10	XVH-340-57CAN-1-50	XVH-330-57BAS-1-10	XVH-330-57CAN-1-10	XVH-330-57MPI-1-10
5.7" CSTN LCD (color)				
QVGA (320 × 240 pixels or 240 × 320 pixels in portrait format)				
115 mm x 86 mm	115 mm x 86 mm	115 mm x 86 mm	115 mm x 86 mm	115 mm x 86 mm
256 colors	256 colors	256 colors	256 colors	256 colors
Normally 35:1	Normally 35:1	Normally 35:1	Normally 35:1	Normally 35:1
Normally 150 cd/m ²	Normally 150 cd/m ²	Normally 150 cd/m ²	Normally 150 cd/m ²	Normally 150 cd/m ²
1 x CCFL, dimmable via software				
Normally 50000 h	Normally 50000 h	Normally 50000 h	Normally 50000 h	Normally 50000 h
–	–	Touch sensor (glass with membrane)	Touch sensor (glass with membrane)	Touch sensor (glass with membrane)
Laminated safety glass, non-reflective		–	–	–
Infra-red touch, 47 × 31 logic channels		Resistive touch, 4-conductor	Resistive touch, 4-conductor	Resistive touch, 4-conductor
RISC, 32-bit, 200 MHz	RISC, 32-bit, 200 MHz	RISC, 32-bit, 200 MHz	RISC, 32-bit, 200 MHz	RISC, 32-bit, 200 MHz
64 MByte	64 MByte	64 MByte	64 MByte	64 MByte
Approx. 1.5 MByte available	Approx. 1.5 MByte available	Approx. 1.5 MByte available	Approx. 1.5 MByte available	Approx. 1.5 MByte available
–	–	–	–	–
1 x CompactFlash card type I/II for operating system, programs and data				
Zero maintenance	Zero maintenance	Zero maintenance	Zero maintenance	Zero maintenance
Normally 10 years	Normally 10 years	Normally 10 years	Normally 10 years	Normally 10 years
Windows CE	Windows CE	Windows CE	Windows CE	Windows CE
GALILEO/EPAM	GALILEO/EPAM	GALILEO/EPAM	GALILEO/EPAM	GALILEO/EPAM
–	–	–	–	–
100Base-TX/10Base-T	100Base-TX/10Base-T	100Base-TX/10Base-T	100Base-TX/10Base-T	100Base-TX/10Base-T
RS232 (Sucom A), not isolated (Sub-D 9-pin plug, UNC)	–	–	–	–
RS485 (Suonet K), isolated (Sub-D 9-pin socket, UNC)	–	–	–	–
–	CAN, galvanically isolated (D-sub 9-pin, UNC)	–	CAN, galvanically isolated (D-sub 9-pin, UNC)	–
–	–	–	–	PROFIBUS galvanically isolated, max. 1.5 MBit/s (D-sub 9-pin socket, UNC)
USB 1.1, not isolated				
24 V DC SELV (safety extra low voltage)				
R.m.s.: 20.4 – 28.8 V DC (rated operating voltage -15 %/+20 %) Absolute with ripple: 19.2 – 30.0 V DC 35 V DC for a duration < 100 ms				
20 ms from nominal voltage (24 V DC), 2 ms from undervoltage (20.4 V DC)				
Max. 21 W (normally 17 W)	Max. 16 W (normally 12 W)	Max. 16 W (normally 12 W)	Max. 16 W (normally 12 W)	Max. 16 W (normally 12 W)
Yes	Yes	Yes	Yes	Yes
Yes (fuse not accessible)				
No (0V connection to housing potential)				

	XVH-340-57BAS-1-10	XVH-340-57CAN-1-10	XVH-340-57MPI-1-10
General			
Front design	Standard front with standard membrane	Standard front with standard membrane	Standard front with standard membrane
Degree of protection			
Front	IP65	IP65	IP65
	Additional mounting bracket set required for flush mounting (→ Accessories)	Additional mounting bracket set required for flush mounting (→ Accessories)	Additional mounting bracket set required for flush mounting (→ Accessories)
Rear	IP20	IP20	IP20
Approvals			
Approvals	cUL	cUL	cUL
Explosion protection (According to ATEX 94/9/EC)	II 3D Ex II T70°C IP5x: Zone 22, Category 3D	II 3D Ex II T70°C IP5x: Zone 22, Category 3D	II 3D Ex II T70°C IP5x: Zone 22, Category 3D
	Additional mounting bracket set required for flush mounting (→ Accessories)	Additional mounting bracket set required for flush mounting (→ Accessories)	Additional mounting bracket set required for flush mounting (→ Accessories)
Applied standards and directives			
EMC (relevant for CE)	EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, EN 61131-2	EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, EN 61131-2	EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, EN 61131-2
Explosion protection (relevant for CE)	EN 60079-0, EN 61241-1, EN 13463	EN 60079-0, EN 61241-1, EN 13463	EN 60079-0, EN 61241-1, EN 13463
Safety	EN 60950/UL 60950	EN 60950/UL 60950	EN 60950/UL 60950
Product standards	EN 50178, EN 61131-2	EN 50178, EN 61131-2	EN 50178, EN 61131-2
Weight	Approx. 1.7 kg	Approx. 1.7 kg	Approx. 1.7 kg
Environmental Conditions			
Temperature			
Operation	0 – 50°C	0 – 50°C	0 – 50°C
Storage/transport	-20 – 60°C	-20 – 60°C	-20 – 60°C
Relative humidity	10 - 95%, non-condensing	10 - 95%, non-condensing	10 - 95%, non-condensing
Impact resistance	To IEC 68-2-27	To IEC 68-2-27	To IEC 68-2-27
Vibration	To IEC 68-2-6	To IEC 68-2-6	To IEC 68-2-6

XVH-342-57SKS-1-10	XVH-340-57CAN-1-50	XVH-330-57BAS-1-10	XVH-330-57CAN-1-10	XVH-330-57MPI-1-10
Standard front with standard membrane	Satin-finish brushed stainless steel	Standard front with standard membrane (fully laminated)	Standard front with standard membrane (fully laminated)	Standard front with standard membrane (fully laminated)
IP65	IP65, IP69K	IP65	IP65	IP65
Additional mounting bracket set required for flush mounting (→ Accessories)	Observe installation instructions to IP69K	Additional mounting bracket set required for flush mounting (→ Accessories)	Additional mounting bracket set required for flush mounting (→ Accessories)	Additional mounting bracket set required for flush mounting (→ Accessories)
IP20	IP20	IP20	IP20	IP20
cUL	cUL	cUL	cUL	cUL
II 3D Ex II T70°C IP5x: Zone 22, Category 3D	II 3D Ex II T70°C IP5x: Zone 22, Category 3D	II 3D Ex II T70°C IP5x: Zone 22, Category 3D	II 3D Ex II T70°C IP5x: Zone 22, Category 3D	II 3D Ex II T70°C IP5x: Zone 22, Category 3D
Additional mounting bracket set required for flush mounting (→ Accessories)	Additional mounting bracket set required for flush mounting (→ Accessories)	Additional mounting bracket set required for flush mounting (→ Accessories)	Additional mounting bracket set required for flush mounting (→ Accessories)	Additional mounting bracket set required for flush mounting (→ Accessories)
EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, EN 61131-2	EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, EN 61131-2	EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, EN 61131-2	EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, EN 61131-2	EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, EN 61131-2
EN 60079-0, EN 61241-1, EN 13463				
EN 60950/UL 60950				
EN 50178, EN 61131-2				
Approx. 1.9 kg	Approx. 2.1 kg	Approx. 1.7 kg	Approx. 1.7 kg	Approx. 1.7 kg
0 – 50°C				
-20 – 60°C				
10 - 95%, non-condensing				
To IEC 68-2-27				
To IEC 68-2-6				

Display

	XV-442-57CQB-1-10 XV-442-57CQB-1-20	XV-442-57CQB-1-50	XV-432-57CQB-1-10	XV-460-57TQB-1-10	XV-460-57TQB-1-50	XV-450-57TQB-1-10
Display						
Screen diagonal/type	5.7" CSTN LCD (color)	5.7" CSTN LCD (color)	5.7" CSTN LCD (color)	5.7" TFT LCD (color)	5.7" TFT LCD (color)	5.7" TFT LCD (color)
Resolution	QVGA (320 × 240 pixels or 240 × 320 pixels in portrait format)					
Visible screen area	115 mm x 86 mm	115 mm x 86 mm	115 mm x 86 mm	115 mm x 86 mm	115 mm x 86 mm	115 mm x 86 mm
Color resolution (grayscale or color)	256 colors	256 colors	256 colors	Adjustable: 65536 or 256 colors	Adjustable: 65536 or 256 colors	Adjustable: 65536 or 256 colors
Contrast ratio	Normally 35:1	Normally 35:1	Normally 35:1	Normally 400:1	Normally 400:1	Normally 400:1
Brightness	Normally 150 cd/m²	Normally 150 cd/m²	Normally 150 cd/m²	Normally 350 cd/m²	Normally 350 cd/m²	Normally 350 cd/m²
Backlight	1 x CCFL, dimmable via software	1 x CCFL, dimmable via software	1 x CCFL, dimmable via software	LED, dimmable via software	LED, dimmable via software	LED, dimmable via software
Lifespan of backlight	Normally 50000 h	Normally 50000 h	Normally 50000 h	Normally 40000 h	Normally 40000 h	Normally 40000 h
Resistive touch protective screen	–	–	Touch sensor (glass with membrane)	–	–	Touch sensor (glass with membrane)
Infra-red touch protective screen	Laminated safety glass, non-reflecting	Laminated safety glass, non-reflecting	–	Laminated safety glass, non-reflecting	Laminated safety glass, non-reflecting	–

Operation

Technology	Infra-red touch, 47 x 31 logic channels	Infra-red touch, 47 x 31 logic channels	Resistive touch, 4-conductor	Infra-red touch, 47 x 31 logic channels	Infra-red touch, 47 x 31 logic channels	Resistive touch, 4-conductor
System						
Processor	RISC, 32 bit, 400 MHz					
Internal memory	64 MByte					
DRAM (OS, program and data memory)	Approx. 1.5 MByte available					
FLASH (can be used for data backup)	Approx. 32 kBByte available					
NVRAM (Retain data)						

External memory

CF slot	1 × Compact Flash card, type I/II for operating system, programs and data	1 × Compact Flash card, type I/II for operating system, programs and data	1 × Compact Flash card, type I/II for operating system, programs and data	1 × Compact Flash card, type I/II for operating system, programs and data	1 × Compact Flash card, type I/II for operating system, programs and data	1 × Compact Flash card, type I/II for operating system, programs and data
---------	---	---	---	---	---	---

Real-time clock (battery backup)

Battery	Zero maintenance					
Backup time at zero voltage						

Operating system	Windows CE					
------------------	------------	------------	------------	------------	------------	------------

Engineering

Visualization software	GALILEO/EPAM					
PLC programming software	XSOFT-CODESYS-2					

Interfaces, communication

Ethernet	100Base-TX/10Base-T											
RS232, not isolated (D-sub 9-pin, UNC)												
CAN, galvanically isolated (D-sub 9-pin, UNC)												
PROFIBUS												
USB Host												
USB device												
Slots for communication cards												

1 1 1 1 1 1

XV-460-84TVB-1-10	XV-440-10TVB-1-10 XV-440-10TVB-1-20	XV-440-10TVB-1-50	XV-430-10TVB-1-10	XV-440-12TSB-1-10 XV-440-12TSB-1-20	XV-440-12TSB-1-50	XV-430-12TSB-1-10	XV-460-15TXB-1-10	XV-460-15TXB-1-50
8.4" TFT LCD (color)								
VGA (640 × 480 pixels or 480 × 640 pixels in portrait format)	SVGA (800 × 600 pixels or 600 × 800 pixels in portrait format)						SVGA (800 × 600 pixels or 600 × 800 pixels in portrait format)	XGA (1024 × 768 pixel)
170 mm x 128 mm	211 mm x 158 mm	211 mm x 158 mm	211 mm x 158 mm	246 mm x 185 mm	246 mm x 185 mm	246 mm x 185 mm	304 mm x 228 mm	304 mm x 228 mm
Adjustable: 65536 or 256 colors	Adjustable: 65536 or 256 colors	Adjustable: 65536 or 256 colors	Adjustable: 65536 or 256 colors	Adjustable: 65536 or 256 colors	Adjustable: 65536 or 256 colors	Adjustable: 65536 or 256 colors	Adjustable: 65536 or 256 colors	Adjustable: 65536 or 256 colors
Normally 400:1	Normally 350:1	Normally 350:1	Normally 350:1	Normally 350:1	Normally 350:1	Normally 350:1	Normally 350:1	Normally 350:1
Normally 350 cd/m²	Normally 350 cd/m²	Normally 350 cd/m²	Normally 350 cd/m²	Normally 350 cd/m²	Normally 350 cd/m²	Normally 350 cd/m²	Normally 400 cd/m²	Normally 400 cd/m²
2 x CCFL, dimmable via software	2 x CCFL, dimmable via software	2 x CCFL, dimmable via software	2 x CCFL, dimmable via software	2 x CCFL, dimmable via software	2 x CCFL, dimmable via software	2 x CCFL, dimmable via software	4 x CCFL, dimmable via software	4 x CCFL, dimmable via software
Normally 50000 h	Normally 50000 h	Normally 50000 h	Normally 50000 h	Normally 50000 h	Normally 50000 h	Normally 50000 h	Normally 50000 h	Normally 50000 h
–	–	–	–	–	–	–	–	–
Laminated safety glass, non-reflecting	Laminated safety glass, non-reflecting	–	Laminated safety glass, non-reflecting	Laminated safety glass, non-reflecting	–	Laminated safety glass, non-reflecting	Laminated safety glass, non-reflecting	Laminated safety glass, non-reflecting

Infra-red touch, 63 x 47 logic channel	Infra-red touch, 79 x 59 logic channels	Infra-red touch, 95 x 71 logic channels	Resistive touch, 4-conductor	Infra-red touch, 95 x 71 logic channels	Infra-red touch, 95 x 71 logic channels	Resistive touch, 4-conductor	Infra-red touch, 107 x 83 logic channels	Infra-red touch, 107 x 83 logic channels
--	---	---	------------------------------	---	---	------------------------------	--	--

RISC, 32 bit, 400 MHz	64 MByte															
Approx. 1.5 MByte available																
Approx. 32 kBByte available																

1 × Compact Flash card, type I/II for operating system, programs and data	2 × Compact Flash card, type I/II for operating system, programs and data
<td

	XV-442-57CQB-1-10 XV-442-57CQB-1-20	XV-442-57CQB-1-50	XV-432-57CQB-1-10	XV-460-57TQB-1-10	XV-460-57TQB-1-50	XV-450-57TQB-1-10
Power supply						
Nominal voltage						
Permissible voltage						
Voltage dips						
Input power						
Protection against polarity reversal						
Fuse						
Potential isolation						
General						
Front design						
Degree of protection						
Front						
IP65						
Additional mounting bracket set required for flush mounting						
Observe installation instructions to IP69K						
Rear						
IP20						
IP20						
IP20						
IP20						
Approvals						
Approvals						
Explosion protection (According to ATEX 94/9/EC)						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						
II 3D Ex II T70°C IP5x: Zone 22, category 3D						


	XVS-440-57MPI-1-10	XVS-430-57MPI-1-10	XVS-460-57MPI-1-10	XVS-450-57MPI-1-10
Display				
Screen diagonal/type	5.7" CSTN LCD (color)			5.7" TFT LCD (color)
Resolution	QVGA (320 × 240 pixels or 240 × 320 pixels in portrait format)			
Visible screen area	115 mm x 86 mm	115 mm x 86 mm	115 mm x 86 mm	115 mm x 86 mm
Color resolution (grayscale or color)	256 colors	256 colors	Adjustable: 65536 or 256 colors	Adjustable: 65536 or 256 colors
Contrast ratio	Normally 35:1	Normally 35:1	Normally 400:1	Normally 400:1
Brightness	Normally 150 cd/m ²	Normally 150 cd/m ²	Normally 350 cd/m ²	Normally 350 cd/m ²
Backlight	1 x CCFL, dimmable via software	1 x CCFL, dimmable via software	LED, dimmable via software	LED, dimmable via software
Lifespan of backlight	Normally 50000 h	Normally 50000 h	Normally 40000 h	Normally 40000 h
Resistive touch protective screen	–	Touch sensor (glass with membrane)	–	Touch sensor (glass with membrane)
Infra-red touch protective screen	Laminated safety glass, non-reflective	–	Laminated safety glass, non-reflective	–
Operation				
Technology	Infra-red touch, 47 x 31 logic channels	Resistive touch, 4-conductor	Infra-red touch, 47 x 31 logic channels	Resistive touch, 4-conductor
System				
Processor	RISC, 32 bit, 400 MHz	RISC, 32 bit, 400 MHz	RISC, 32 bit, 400 MHz	RISC, 32 bit, 400 MHz
Internal memory	64 MByte	64 MByte	64 MByte	64 MByte
DRAM (OS, program and data memory)	Approx. 1.5 MByte available			
FLASH (can be used for data backup)	Approx. 32 kBByte available			
External memory	CF slot			
Real-time clock (battery backup)	1 x CompactFlash card type I/II for operating system, programs and data			
Battery	Zero maintenance	Zero maintenance	Zero maintenance	Zero maintenance
Backup time at zero voltage	Normally 10 years	Normally 10 years	Normally 10 years	Normally 10 years
Operating system	Windows CE	Windows CE	Windows CE	Windows CE
Engineering				
Visualization software	GALILEO/EPAM	GALILEO/EPAM	GALILEO/EPAM	GALILEO/EPAM
PLC programming software	XSOFT-CODESYS-2	XSOFT-CODESYS-2	XSOFT-CODESYS-2	XSOFT-CODESYS-2
Interfaces, communication				
Ethernet	100Base-TX/10Base-T	100Base-TX/10Base-T	100Base-TX/10Base-T	100Base-TX/10Base-T
System port	RS232, not isolated (D-sub 9-pin, UNC)			
CAN	–	–	–	–
PROFIBUS	PROFIBUS galvanically isolated, max. 1.5 MBit/s (D-sub 9-pin socket, UNC)			
USB Host	USB 2.0 (1.5/12 MBit/s), not isolated			
USB device	USB 1.1, not isolated			
Power supply				
Nominal voltage	24 V DC SELV (safety extra low voltage)			
Permissible voltage	R.m.s.: 20.4 – 28.8 V DC (nominal voltage -15 %/+20 %) Absolute with ripple: 19.2 – 30.0 V DC 35 V DC for a duration < 100 ms			
Voltage dips	20 ms from nominal voltage (24 V DC), 2 ms from undervoltage (20.4 V DC)	20 ms from nominal voltage (24 V DC), 2 ms from undervoltage (20.4 V DC)	20 ms from nominal voltage (24 V DC), 2 ms from undervoltage (20.4 V DC)	20 ms from nominal voltage (24 V DC), 2 ms from undervoltage (20.4 V DC)
Input power	Max. 19 W (Normally 12 W)	Max. 19 W (Normally 12 W)	Max. 19 W (normally 12 W)	Max. 19 W (normally 12 W)
Protection against polarity reversal	Yes	Yes	Yes	Yes
Fuse	Yes (fuse not accessible)			
Potential isolation	No (0 V connection to housing potential)			

XVS-460-84MPI-1-10	XVS-440-10MPI-1-10	XVS-430-10MPI-1-10	XVS-440-12MPI-1-10	XVS-430-12MPI-1-10	XVS-460-15MPI-1-10
8.4" TFT LCD (color)	10.4" TFT LCD (color)	10.4" TFT LCD (color)	12.1" TFT LCD (color)	12.1" TFT LCD (color)	15" TFT LCD (color)
VGA (640 × 480 pixels or 480 × 640 pixels in portrait format)			SVGA (800 × 600 pixels or 600 × 800 pixels in portrait format)	XGA (1024 × 768 pixel)	
170 mm x 128 mm	211 mm x 158 mm	211 mm x 158 mm	246 mm x 185 mm	246 mm x 185 mm	304 mm x 228 mm
Adjustable: 65536 or 256 colors	Adjustable: 65536 or 256 colors	Adjustable: 65536 or 256 colors	Adjustable: 65536 or 256 colors	Adjustable: 65536 or 256 colors	Adjustable: 65536 or 256 colors
Normally 400:1	Normally 350:1	Normally 350:1	Normally 350:1	Normally 350:1	Normally 350:1
Normally 350 cd/m ²	Normally 350 cd/m ²	Normally 350 cd/m ²	Normally 350 cd/m ²	Normally 350 cd/m ²	Normally 400 cd/m ²
2 x CCFL, dimmable via software	2 x CCFL, dimmable via software	2 x CCFL, dimmable via software	2 x CCFL, dimmable via software	2 x CCFL, dimmable via software	4 x CCFL, dimmable via software
Normally 50000 h	Normally 50000 h	Normally 50000 h	Normally 50000 h	Normally 50000 h	Normally 50000 h
–	–	Touch sensor (glass with membrane)	–	Touch sensor (glass with membrane)	–
Laminated safety glass, non-reflective	Laminated safety glass, non-reflective	Laminated safety glass, non-reflective	Laminated safety glass, non-reflective	Laminated safety glass, non-reflective	Laminated safety glass, non-reflective
Operation					
Infra-red touch, 63 x 47 logic channels	Infra-red touch, 79 x 59 logic channels	Resistive touch, 4-conductor	Infra-red touch, 95 x 71 logic channels	Resistive touch, 4-conductor	Infra-red touch, 107 x 83 logic channels
System					
Processor	RISC, 32 bit, 400 MHz	RISC, 32 bit, 400 MHz	RISC, 32 bit, 400 MHz	RISC, 32 bit, 400 MHz	RISC, 32 bit, 400 MHz
Internal memory	64 MByte	64 MByte	64 MByte	64 MByte	64 MByte
DRAM (OS, program and data memory)	Approx. 1.5 MByte available				
FLASH (can be used for data backup)	Approx. 32 kBByte available				
External memory	1 x CompactFlash card type I/II for operating system, programs and data				2 x CompactFlash card type I/II for operating system, programs and data
CF slot					
Real-time clock (battery backup)					
Battery	Zero maintenance	Zero maintenance	Zero maintenance	Zero maintenance	Zero maintenance
Backup time at zero voltage	Normally 10 years	Normally 10 years	Normally 10 years	Normally 10 years	Normally 10 years
Operating system	Windows CE	Windows CE	Windows CE	Windows CE	Windows CE
Engineering					
Visualization software	GALILEO/EPAM	GALILEO/EPAM	GALILEO/EPAM	GALILEO/EPAM	GALILEO/EPAM
PLC programming software	XSOFT-CODESYS-2	XSOFT-CODESYS-2	XSOFT-CODESYS-2	XSOFT-CODESYS-2	XSOFT-CODESYS-2
Interfaces, communication					
Ethernet	100Base-TX/10Base-T	100Base-TX/10Base-T	100Base-TX/10Base-T	100Base-TX/10Base-T	100Base-TX/10Base-T
System port	RS232, not isolated (D-sub 9-pin, UNC)				
CAN	–	–	–	–	–
PROFIBUS	PROFIBUS galvanically isolated, max. 1.5 MBit/s (D-sub 9-pin socket, UNC)				
USB Host	USB 2.0 (1.5/12 MBit/s), not isolated	2 x USB 2.0 (1.5/12 MBit/s), not isolated			
USB device	USB 1.1, not isolated				
Power supply					
Nominal voltage	24 V DC SELV (safety extra low voltage)				
Permissible voltage	R.m.s.: 20.4 – 28.8 V DC (nominal voltage -15 %/+20 %) Absolute with ripple: 19.2 – 30.0 V DC 35 V DC for a duration < 100 ms				
Voltage dips	20 ms from nominal voltage (24 V DC), 2 ms from undervoltage (20.4 V DC)	20 ms from nominal voltage (24 V DC), 2 ms from undervoltage (20.4 V DC)	20 ms from nominal voltage (24 V DC), 2 ms from undervoltage (20.4 V DC)	20 ms from nominal voltage (24 V DC), 2 ms from undervoltage (20.4 V DC)	20 ms from nominal voltage (24 V DC), 2 ms from undervoltage (20.4 V DC)
Input power	Max. 19 W (Normally 12 W)	Max. 19 W (Normally 12 W)	Max. 19 W (normally 12 W)	Max. 22 W (normally 15 W)	Max. 24 W (normally 14 W)
Protection against polarity reversal	Yes	Yes	Yes	Yes	Yes
Fuse	Yes (fuse not accessible)				
Potential isolation	No (0 V connection to housing potential)				


	XVS-440-57MPI-1-10	XVS-430-57MPI-1-10	XVS-460-57MPI-1-10	XVS-450-57MPI-1-10				
General								
Front design	Standard membrane	Standard membrane (fully laminated)	Standard membrane	Standard membrane (fully laminated)				
Degree of protection								
Front	IP65	IP65	IP65	IP65				
Additional mounting bracket set required for flush mounting (→ Page 14/12)								
Rear	IP20	IP20	IP20	IP20				
Approvals								
Approvals	cUL	cUL	cUL	cUL				
Explosion protection (According to ATEX 94/9/EC)	II 3D Ex II T70°C IP5x: Zone 22, Category 3D							
Additional mounting bracket set required for flush mounting (→ Page 14/12)								
Applied standards and directives								
EMC (relevant for CE)	EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, EN 61131-2							
Explosion protection (relevant for CE)	EN 60079-0, EN 61241-1, EN 13463							
Safety	EN 60950/UL 60950	EN 60950/UL 60950	EN 60950/UL 60950	EN 60950/UL 60951				
Product standards	EN 50178, EN 61131-2	EN 50178, EN 61131-2	EN 50178, EN 61131-2	EN 50178, EN 61131-2				
Weight	Approx. 1.8 kg	Approx. 1.8 kg	Approx. 1.8 kg	Approx. 1.8 kg				
Environmental Conditions								
Temperature								
Operation	0 – 50°C	0 – 50°C	0 – 50°C	0 – 50°C				
Storage/transport	-20 – 60°C	-20 – 60°C	-20 – 60°C	-20 – 60°C				
Relative humidity	10 – 95%, non-condensing	10 – 95%, non-condensing	10 – 95%, non-condensing	10 – 95%, non-condensing				
Impact resistance	To IEC 68-2-27	To IEC 68-2-27	To IEC 68-2-27	To IEC 68-2-27				
Vibration	To IEC 68-2-6	To IEC 68-2-6	To IEC 68-2-6	To IEC 68-2-6				

Dimensions

XV-..., XVH-3..., XVS-4..., MFD4...

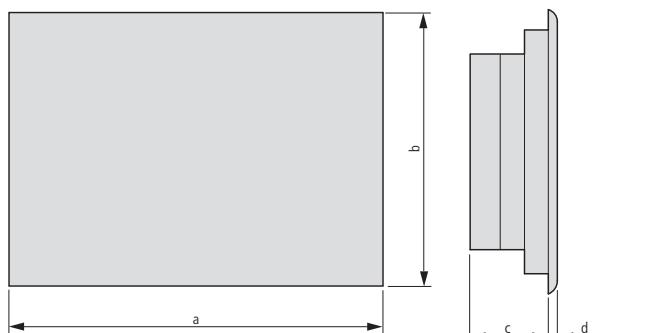


Mounting dimensions

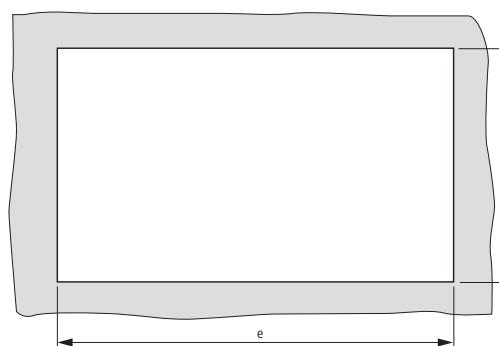


Part No.	a	b	c	d	e	f
XV-102-...-35...	136	100	25	5	123	87
XV-102-...-57...	170	130	34	5	157	117
XV-102-...-70...	210	135	33	5	197	122
XV-2-...-57...	212	156	50	5	198	142
MFD4...	212	156	54	5	198	142
XVH-3-...-57BAS...	212	156	55	5	198	142
XVH-3-...-57CAN...	212	156	55	5	198	142
XVH-3-...-57MPI...	212	156	55	5	198	142
XVH-3-...-57SKS...	212	156	76	5	198	142
XVS-4-...-57...	212	156	55	5	198	142
XVS-4-...-84...	275	208	70	5	261	194
XVS-4-...-10...	345	260	62	5	329	238
XVS-4-...-12...	361	279	62	5	344	262
XVS-4-...-15...	427	332	68	5	410	315
XV-4-...-57...	212	156	76	5	198	142
XV-4-...-84...	275	208	90	5	261	194
XV-4-...-10...	345	260	88	5	329	238
XV-4-...-12...	361	279	88	5	344	262
XV-4-...-15...	427	332	94	5	410	315

XVS-460-84MPI-1-10	XVS-440-10MPI-1-10	XVS-430-10MPI-1-10	XVS-440-12MPI-1-10	XVS-430-12MPI-1-10	XVS-460-15MPI-1-10
Standard membrane	Standard membrane	Standard membrane (fully laminated)	Standard membrane	Standard membrane (fully laminated)	Standard membrane
IP65	IP65	IP65	IP65	IP65	IP65
Additional mounting bracket set required for flush mounting (→ Page 14/12)	Additional mounting bracket set required for flush mounting (→ Page 14/12)	Additional mounting bracket set required for flush mounting (→ Page 14/12)	Additional mounting bracket set required for flush mounting (→ Page 14/12)	Additional mounting bracket set required for flush mounting (→ Page 14/12)	Additional mounting bracket set required for flush mounting (→ Page 14/12)
IP20	IP20	IP20	IP20	IP20	IP20
cUL	cUL	cUL	cUL	cUL	cUL
II 3D Ex II T70°C IP5x: Zone 22, Category 3D	II 3D Ex II T70°C IP5x: Zone 22, Category 3D	II 3D Ex II T70°C IP5x: Zone 22, Category 3D	II 3D Ex II T70°C IP5x: Zone 22, Category 3D	II 3D Ex II T70°C IP5x: Zone 22, Category 3D	II 3D Ex II T70°C IP5x: Zone 22, Category 3D
EN 61000-6-2, EN 61000-6-4, EN 61131-2					
EN 60079-0, EN 61241-1, EN 13463					
EN 60950/UL 60952	EN 60950/UL 60950				
EN 50178, EN 61131-2					
Approx. 2.6 kg	Approx. 3.7 kg	Approx. 3.7 kg	Approx. 4.1 kg	Approx. 4.1 kg	Approx. 5.8 kg
0 – 50°C					
-20 – 60°C					
10 – 95%, non-condensing					
To IEC 68-2-27					
To IEC 68-2-6					


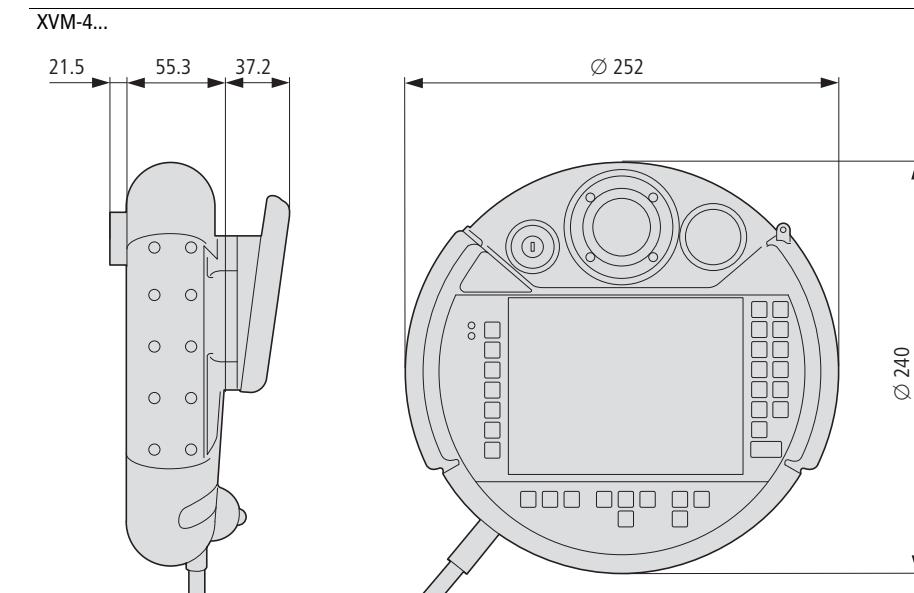


System overview

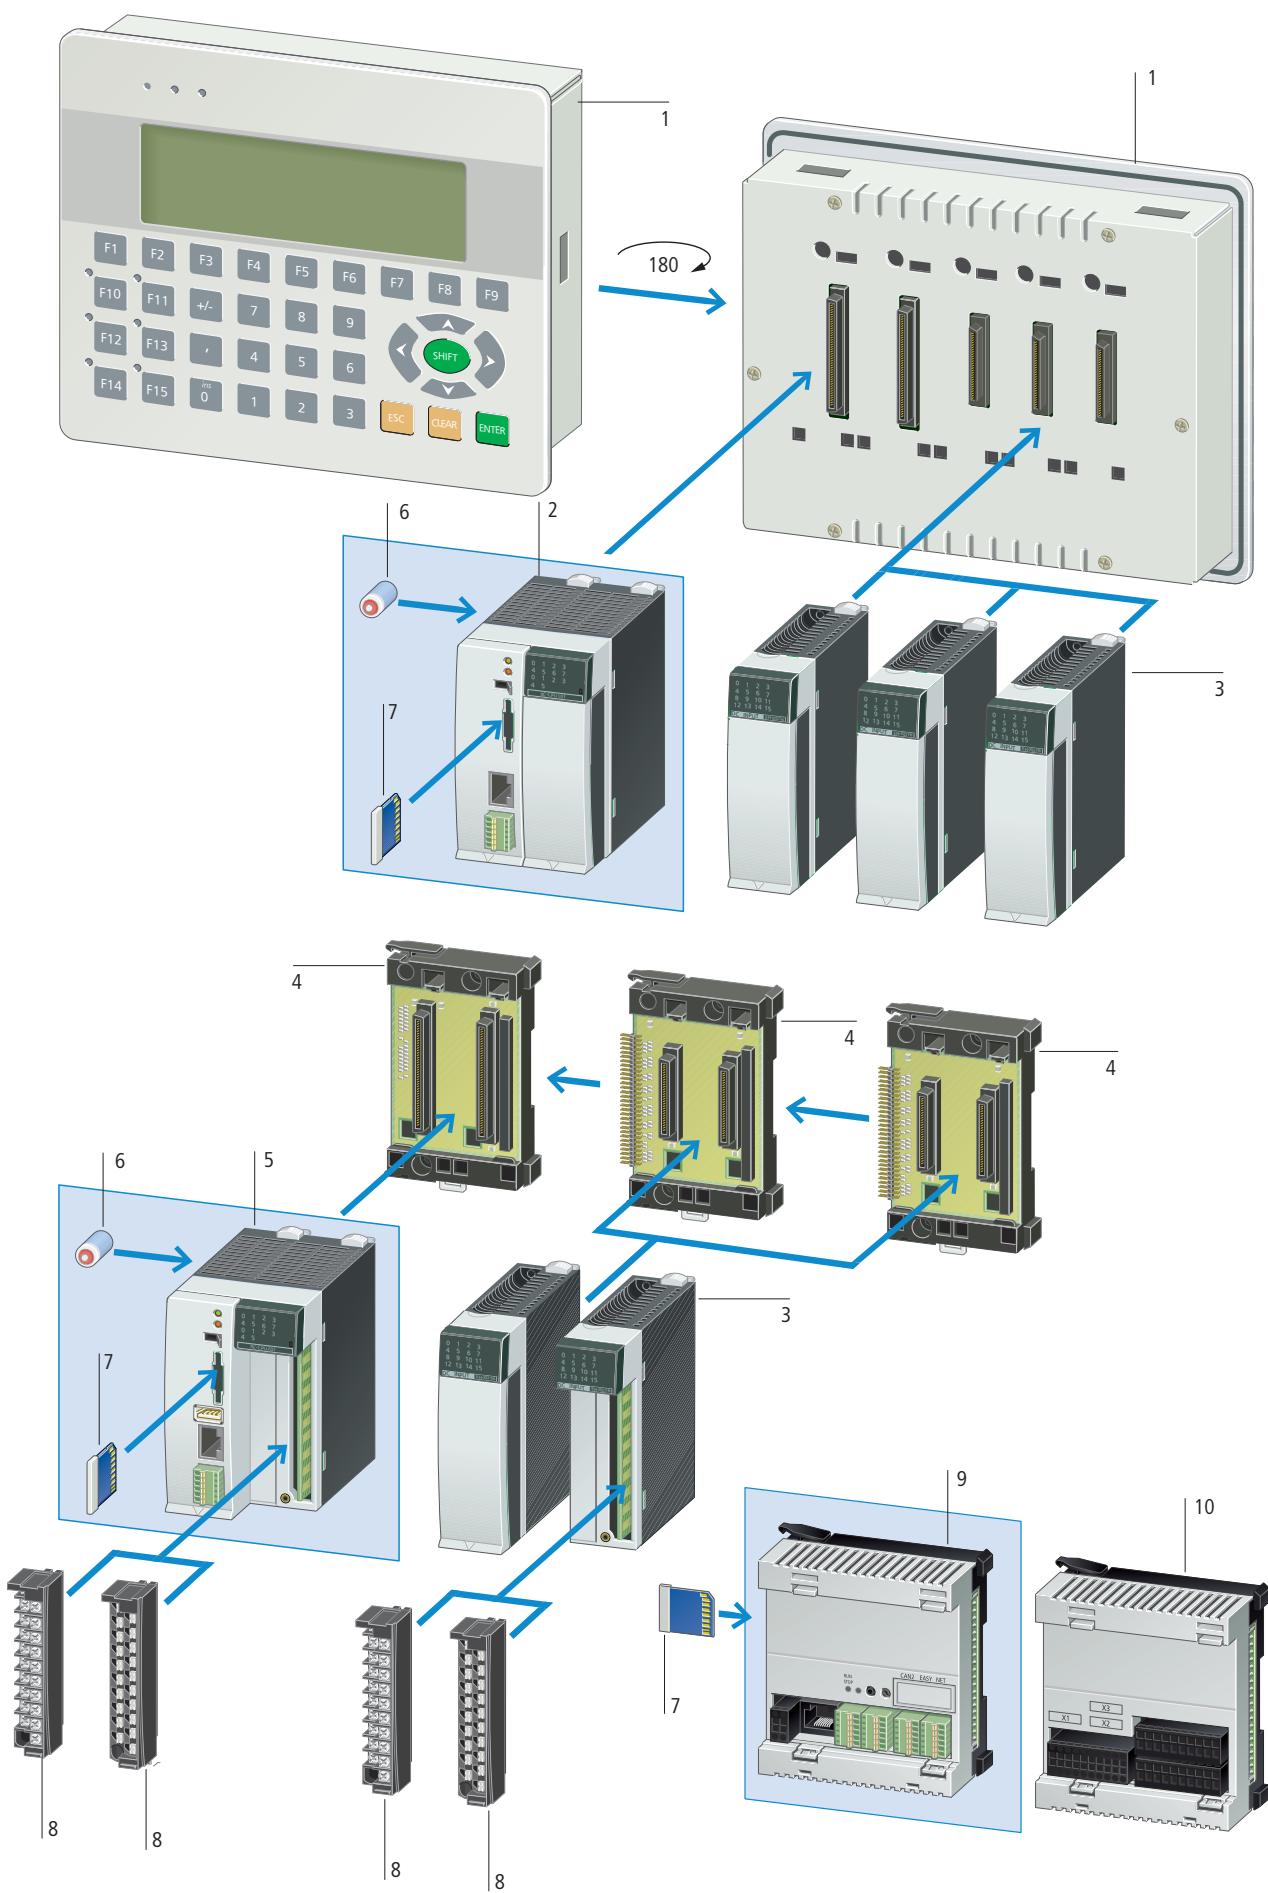

XV101 text display	1	XI/OC I/O modules	3	XC200	5	XI/OC terminal block	8
Always in conjunction with XC100-XV and XI/OC (MMI-PLC)		Space-optimized input/output modules		Modular PLC with Ethernet interface		Connection options through spring-loaded or screw terminals	
Displays: 4 lines × 20 characters (or 8 × 40)		Local extension on XC100/200		8 digital inputs		Exchange/remove without disconnecting wiring	
LCD display with STN technology		Digital, analog, technology, counter and communication cards		6 digital outputs		→ Page 14/40	
9 (or 15) function keys with insert strips		XI/OC modules can be exchanged without the need to undo wiring		2 counters			
Numerical key block and arrow keys		→ Page 14/39		2 interrupt inputs			
Controller status LED				1 incremental input			
→ Page 14/38				CANopen fieldbus interface			
XC100	2	Module backplane	4	Web server		XC121	9
Modular PLC		XI/OC backplane		RS232 interface		Compact PLC	
8 digital inputs		For connecting the XC100/200 controller and the XI/OC modules with the top-hat rail		Locally expandable with XI/OC		2 CANopen interfaces	
6 digital outputs		→ Page 14/40		→ Page 14/38		RS232 interface	
4 interrupt inputs						RS232/RS485 interface	
CANopen fieldbus interface						MMC Memory card	
RS232 interface						OPC server	
Locally expandable with XI/OC						→ Page 14/38	
Can be combined with XV text displays							
→ Page 14/38							
						EXT121-1	10
						Expansion for compact PLC	
						10 digital inputs, of which, 6 interrupt inputs	
						8 digital outputs	
						6 analog inputs: 2 Pt100 RTD, 2 x 0-10 V, 2 x 0-20 mA	
						2 analog outputs 0 - 10 V	
						→ Page 14/38	











Ordering	Description	Part No. Article No.	Price See price list	Std. pack
XC100				
	• 24 V supply • Can be locally expanded with 15 XI/OC is remotely expandable			
	• The following accessories are required: terminals, backplane, battery			
	• Controller with 8 digital inputs (4 interrupt inputs) • 6 digital outputs; RS232 interface for programming and communication • CANopen interface • slot for MMC memory card • optional expansion with text display • RUN/STOP switch and LED indicators.			
	64 kByte user memory	XC-CPU101-C64K-8DI-6DO 262152		1 off  
	128 kByte user memory	XC-CPU101-C128K-8DI-6DO 262146		
	256 kByte user memory	XC-CPU101-C256K-8DI-6DO 274399		
	Optical CAN interface: 128 kByte user memory	XC-CPU101-FC128K-8DI-6DO 289169		
	Operation with display XV-101-....	XC-CPU101-C64K-8DI-6DO-XV 262247		
	64 kByte user memory	XC-CPU101-C128K-8DI-6DO-XV 262150		
	Operation with display XV-101-....	XC-CPU101-C256K-8DI-6DO-XV 279280		
	128 kByte user memory			
	Operation with display XV-101-....			
	256 kByte user memory			
Text display for XC100				
	• Backlit LCD • membrane keypad • 1 slot for XC100 • 3 spare slots for XI/OC modules • numerical keypad • arrow keys • contrast setting adjustable via software			
	Operation with XC-CPU101-...-XV 4 lines x 20 characters, resolution 122 x 32 pixels, 9 function keys	XV-101-K42 262403		1 off  
	Operation with XC-CPU101-...-XV 8 lines x 40 characters, resolution 240 x 64 pixels, 15 function keys	XV-101-K84 262404		1 off  
XC121				
	• Compact PLC • 24 V supply • 2 CANopen interfaces • RS232 interface for programming and communication • second RS232/RS485 interface • Slot for MMC memory card • Connection through spring-cage terminal blocks • OPC server			
	Can be locally expanded with I/O module XIO-EXT-121-1 256 kByte program memory, 244 kByte data memory	XC-CPU121-2C256K 290446		1 off  
I/O expansion for XC121				
	• Expansion unit with digital and analog inputs/outputs • expandable with XI/OC signal modules (except XIOC-NET-DP-M) • pluggable spring-cage terminals			
	Local I/O expansions for PLC XC121 10 digital inputs 24 V DC, of which 6 interrupt 8 digital inputs/outputs 24 V DC, 0.5 A 2 analog inputs 0 - 10 V 2 analog inputs 0 - 20 mA 2 analog inputs Pt100 RTD 2 analog outputs 0 - 10 V	XIO-EXT121-1 290450		1 off  
XC200				
	• 24 V supply • Can be locally expanded with 15 XI/OC is remotely expandable			
	• The following accessories are required: terminals, backplane, battery			
	• Controller with 8 digital inputs (2 counter, 2 interrupt inputs, 1 incremental input) • 6 digital outputs; Ethernet and RS232 interface for programming and communication • CANopen interface • slot for memory card (MMC) XC-CPU202 (MMC and SD) • USB interface • RUN/STOP switch and LED indicators			
	256 kByte user memory	XC-CPU201-EC256K-8DI-6DO 262155		1 off  
	2 MByte user memory	XC-CPU201-EC512K-8DI-6DO 262157		
	256 kByte user memory Integrated web server	XC-CPU201-EC256K-8DI-6DO-XV 262156		
	2 MByte user memory, Integrated web server	XC-CPU201-EC512K-8DI-6DO-XV 262158		
	4 Mbyte user memory, integrated Web server	XC-CPU202-EC4M-8DI-6DO-XV 134238		

Information relevant for export to North America



Product Standards	IEC: see Technical Data; UL508; CSA-C22.2 No. 0-M; CSA-C22.2 No. 142-M; CE marking	CSA File No.	012528
UL File No.	E135462	CSA Class No.	2252-01
UL CCN	NRAQ	NA Certification	UL Listed, CSA certified
		Degree of Protection	IEC: IP20, UL/CSA Type: -

HPL14039EN

Description	Part No. Article No.	Price See price list	Std. pack	Information relevant for export to North America
XI/OC				 
<ul style="list-style-type: none"> Compact I/O system for connection to XC100/200 Modular PLCs XC100/200 expandable with up to 15 XI/OC modules Optionally, screw terminals or spring-loaded terminals for digital/analog modules 				
Digital modules				
	8 inputs, 24 V DC	XIOC-8DI 257891	1 off  	Product Standards IEC: see Technical Data; UL508; CSA-C22.2 No. 0-M; CSA-C22.2 No. 142-M; CE marking UL File No. E135462 UL CCN NRAQ CSA File No. 012528 CSA Class No. 2252-01 NA Certification UL Listed, CSA certified Degree of Protection IEC: IP20, UL/CSA Type: -
16 inputs, 24 V DC	XIOC-16DI 257892			
32 inputs, 24 V DC	XIOC-32DI 267411			
8 outputs, 24 V DC, 0.3 A	XIOC-8DO 257894			
12 relay outputs	XIOC-12DO-R 257897			
16 outputs, 24 V DC, 0.3 A	XIOC-16DO 257896			
16 outputs, 24 V DC, 0.8 A, short-circuit proof	XIOC-16DO-S 257895			
16 terminals, 4 inputs, 12 freely parameterizable as inputs/outputs, 24 V DC Outputs 0.5 A	XIOC-16DX 262322			
32 outputs, 24 V DC, 0.2 A	XIOC-32DO 267413			
Analog modules				
	Inputs 8 inputs 4 - 20 mA	XIOC-8AI-I2 262549	1 off  	Product Standards IEC: see Technical Data; UL508; CSA-C22.2 No. 0-M; CSA-C22.2 No. 142-M; CE marking UL File No. E135462 UL CCN NRAQ CSA File No. 012528 CSA Class No. 2252-01 NA Certification UL Listed, CSA certified Degree of Protection IEC: IP20, UL/CSA Type: -
Inputs 8 voltage inputs 0 - 10 V	XIOC-8AI-U1 257899			
Inputs 8 voltage inputs, ±10 V	XIOC-8AI-U2 257900			
Inputs 4 inputs for temperature monitoring, Pt100/1000	XIOC-4T-Pt 257901			
Inputs 4 inputs for thermocouples Type K, J, L, B, N, E, R, S, T	XIOC-4AI-T 289933			
Outputs 2 outputs, ±10 V	XIOC-2AO-U2 257904			
Outputs 2 outputs 0 - 10 V, 2 outputs 4 - 20 mA	XIOC-2AO-U1-2AO-I2 257902			
Outputs 4 outputs 0 - 10 V	XIOC-4AO-U1 257903			
Combination modules 2 inputs and 1 output 0 - 10 V 1 ms conversion time	XIOC-2AI-1AO-U1 262409			
Combination modules 2 inputs and 1 output 0 - 10 V, 0 - 20 mA 1 ms conversion time, individual changeover	XIOC-2AI-1AO-U1-I1 281545			
Combination modules 4 inputs and 2 outputs 0 - 10 V 1 ms conversion time	XIOC-4AI-2AO-U1 262405			
Combination modules 4 inputs and 2 outputs 0 - 10 V, 0 - 20 mA 1 ms conversion time, individual changeover	XIOC-4AI-2AO-U1-I1 281544			
Counter modules				
	1 input up to 100 kHz, 24 V DC, 5 V DC, 2 digital transistor outputs, opto-isolated, 24 V DC 30 pin connector required for counter module	XIOC-1CNT-100KHZ 257906	1 off  	Product Standards IEC: see Technical Data; UL508; CSA-C22.2 No. 0-M; CSA-C22.2 No. 142-M; CE marking UL File No. E135462 UL CCN NRAQ CSA File No. 012528 CSA Class No. 2252-01 NA Certification UL Listed, CSA certified Degree of Protection IEC: IP20, UL/CSA Type: -
2 inputs up to 100 kHz, (24 V DC or 5 V diff), 4 digital transistor outputs, opto-isolated, 24 V DC 30 pin connector required for counter module	XIOC-2CNT-100KHZ 257907			
2 incremental encoders up to 400 kHz, 5 V DC, 2 analog outputs ±10 V	XIOC-2CNT-2AO-INC 262417			

Description	Part No. Article No.	Price See price list	Std. pack	Information relevant for export to North America	
Communication cards					
	PROFIBUS-DP master module	XIOC-NET-DP-M 257908	1 off	Product Standards	IEC: see Technical Data; UL508; CSA-C22.2 No. 0-M; CSA-C22.2 No. 142-M; CE marking
	PROFIBUS-DP slave module	XIOC-NET-DP-S 286419		UL File No.	E135462
	Suconet K master module	XIOC-NET-SK-M 289982		UL CCN	NRAQ
	Serial interfaces RS232C, RS485, RS422 Modes of operation: Transparent mode Modbus master/slave SUCOM-A Suconet-K slave	XIOC-SER 267191		CSA File No.	012528
	Serial interfaces RS232C, RS485, RS422 Modes of operation: Transparent mode Modbus master/slave SUCOM-A DNP protocol	XIOC-TC1 135265	1 off	CSA Class No.	2252-01
				NA Certification	UL Listed, CSA certified
				Degree of Protection	IEC: IP20, UL/CSA Type: -
Accessories					
Terminals					
One 18 pole terminal plug is required for each digital and analog module.					
-	18-pin connector with spring-cage terminal for digital or analog I/O.	XIOC-TERM-18T 258104	10 off	NA Certification	Request filed for UL and CSA
-	18-pin connector with screw terminals for digital or analog I/O.	XIOC-TERM-18S 258102			
-	30 pin connector for counter module, with 4 m cable XIOC-1CNT-100KHZ XIOC-2CNT-100KHZ	XIOC-TERM30-CNT4 262248	1 off		
-	40 pin connector for digital module, with 4 m cable XIOC-32DI XIOC-32DO	XIOC-TERM32 267414			
Module backplane					
	Basic backplane for mounting XC100/200 on top-hat rail, can be expanded Width: 2 slots for controller	XIOC-BP-XC 260792	1 off	Product Standards	IEC: see Technical Data; UL508; CSA-C22.2 No. 0-M; CSA-C22.2 No. 142-M; CE marking
	Expansion backplane for mounting XI/OC modules on top-hat rail, can be expanded Width: 2 slots for XI/OC modules	XIOC-BP-2 260794	1 off	UL File No.	E135462
	Basic backplane for mounting XC100/200 on top-hat rail, can be expanded Width: 3 slots for controller and one XI/OC module	XIOC-BP-XC1 260793	1 off	UL CCN	NRAQ
	Expansion backplane for mounting XI/OC modules on top-hat rail, can be expanded Width: 3 slots for XI/OC modules	XIOC-BP-3 260795	1 off	CSA File No.	012528
	Expansion backplane for mounting XI/OC modules on top-hat rail, can be expanded Width: 3 slots for XI/OC modules Note: Module Backplane for expansion with up to 15 modules, must be plugged into the 6th slot	XIOC-BP-EXT 274291	1 off	CSA Class No.	2252-01
				NA Certification	UL Listed, CSA certified
				Degree of Protection	IEC: IP20, UL/CSA Type: -

HPL14041EN

Description	Part No. Article No.	Price See price list	Std. pack	Information relevant for export to North America	
Accessories					
Memory card For storage of programs, data, recipes for XC100, XC121, XC200, MFD4					
– 512 MByte	XT-MEM-MM512M 138257		1 off	NA Certification	Request filed for UL and CSA
– 32 MByte	XT-MEM-MM32M 262731		1 off	Product Standards	IEC: see Technical Data; UL508; CSA-C22.2 No. 0-M; CSA-C22.2 No. 142-M; CE marking UL File No. E135462 UL CCN NRAQ CSA File No. 012528 CSA Class No. 2252-01 NA Certification UL Listed, CSA certified Degree of Protection IEC: IP20, UL/CSA Type: -
Battery			1 off		
	For backup of real-time clock and retentive data of the MFD4	XT-CPU-BAT1 256209			
Programming cables					
	2 m D-sub 9-pin, serial	XT-SUB-D/RJ45 262186	1 off		
	2 m Ethernet cross	XT-CAT5-X-2 256487		1 off	
	5 m Ethernet cross	XT-CAT5-X-5 256488			
	Programming cable for XC, EC4P, EU5C through USB interface	EU4A-RJ45-USB-CAB1 115735			
Connection cables					
	0.3 m Connection cable for XC200 to interface switch	EASY-NT-30 256283	1 off	Product Standards	IEC/EN see Technical Data; UL 508; CSA C22.2 No. 142- M1987; CSA C22.2 No. 213- M1987; CE marking UL File No. E135462 UL CCN NRAQ CSA File No. 012528 CSA Class No. 2258-02 NA Certification UL Listed, CSA certified Degree of Protection IEC: IP20, UL/CSA Type: -
	0.8 m Connection cable for XC200 to interface switch	EASY-NT-80 256284			
	1.5 m Connection cable for XC200 to interface switch	EASY-NT-150 256285			
CAN cable to ISO 11898 Recommendation: UNITRONIC bus LD, from LAPPKABEL 2 x 2 x 0.22 mm ² Characteristic impedance: 100 - 120 Ω Effective capacitance: 800 Hz, max. 60 nF/km					
Empty module					
–	Empty module to cover free XI/OC slots	XIOC-NOP 288894	1 off	Product Standards	IEC: see Technical Data; UL508; CSA-C22.2 No. 0-M; CSA-C22.2 No. 142-M; CE marking UL File No. E135462 UL CCN NRAQ CSA File No. 012528 CSA Class No. 2252-01 NA Certification UL Listed, CSA certified Degree of Protection IEC: IP20, UL/CSA Type: -
Interface switch					
–	Interface adapter to split the combined RS232/Ethernet interface of the XC200 into RJ45 sockets Connection cable EASY-NT-30/80/150 usable for connection to XC200.	XT-RJ45-ETH-RS232 289170	1 off		
Filter					
–	Interference suppression of the external 24 V DC supply of the XC100/200 Max. current consumption: 2.2 A	XT-FIL-1 285316	1 off		
–	Power supply interference suppression of I/O modules of XC100/200. Max. current consumption: 12 A	XT-FIL-2 118980	1 off		
Insert labels					
–	Insert labels for user inscription For 3 devices: XV-101-K42 For 3 devices: XV-101-K84	XT-BS1 265365	1 off	UL/CSA certification not required	

Programming software → Page 14/130



Technical data

	XC-CPU101- C64K-8DI-6DO(-XV)	XC-CPU101- C128K-8DI-6DO(-XV)	XC-CPU101-FC128K-8DI-6DO(-XV)	XC-CPU101- C256K-8DI-6DO(-XV)	
General					
Standards	IEC/EN 61131-2 EN 50178	IEC/EN 61131-2 EN 50178	IEC/EN 61131-2 EN 50178	IEC/EN 61131-2 EN 50178	
Ambient temperature	°C 0 - +55	°C 0 - +55	°C 0 - +55	°C 0 - +55	
Storage	°C -25 to +70	°C -25 to +70	°C -25 to +70	°C -25 to +70	
Mounting position	Horizontal	Horizontal	Horizontal	Horizontal	
Relative humidity, non-condensing (IEC/EN 60068-2-30)	% 10 - 95	% 10 - 95	% 10 - 95	% 10 - 95	
Air pressure (in operation)	hPa 795 - 1080	hPa 795 - 1080	hPa 795 - 1080	hPa 795 - 1080	
Vibration resistance	10 - 57 Hz ±0.075 mm 57 - 150 Hz ±1.0 g	10 - 57 Hz ±0.075 mm 57 - 150 Hz ±1.0 g	10 - 57 Hz ±0.075 mm 57 - 150 Hz ±1.0 g	10 - 57 Hz ±0.075 mm 57 - 150 Hz ±1.0 g	
Mechanical shock resistance	15 g/11 ms	15 g/11 ms	15 g/11 ms	15 g/11 ms	
Oversupply category	II	II	II	II	
Pollution degree	2	2	2	2	
Degree of Protection	IP20	IP20	IP20	IP20	
Rated insulation voltage	U _i V 500	U _i V 500	U _i V 500	U _i V 500	
Emitted interference	EN 61000-6-4, Class A	EN 61000-6-4, Class A	EN 61000-6-4, Class A	EN 61000-6-4, Class A	
Interference immunity	EN 61000-6-2	EN 61000-6-2	EN 61000-6-2	EN 61000-6-2	
Battery (lifespan)	Normally 5 years	Normally 5 years	Normally 5 years	Normally 5 years	
Weight	kg 0.23	kg 0.23	kg 0.23	kg 0.23	
Terminals	Plug-in terminal block	Plug-in terminal block	Plug-in terminal block	Plug-in terminal block	
Terminal capacity					
Screw terminals					
Flexible with ferrule	mm ² 0.5 - 1.5	mm ² 0.5 - 1.5	mm ² 0.5 - 1.5	mm ² 0.5 - 1.5	
Solid	mm ² 0.5 - 2.5	mm ² 0.5 - 2.5	mm ² 0.5 - 2.5	mm ² 0.5 - 2.5	
Spring-cage terminal					
Flexible	mm ² 0.34 - 1.0	mm ² 0.34 - 1.0	mm ² 0.34 - 1.0	mm ² 0.34 - 1.0	
Solid	mm ² 0.14 - 1.0	mm ² 0.14 - 1.0	mm ² 0.14 - 1.0	mm ² 0.14 - 1.0	
Electromagnetic compatibility (EMC)					
→ Page 14/58					
Power supply					
Mains failure duration	ms 10	ms 10	ms 10	ms 10	
Repetition rate	s 1	s 1	s 1	s 1	
Input voltage	V DC 24	V DC 24	V DC 24	V DC 24	
Permissible range	V DC 20.4...28.8	V DC 20.4...28.8	V DC 20.4...28.8	V DC 20.4...28.8	
Input power	W Max. 26	W Max. 26	W Max. 26	W Max. 26	
Ripple	% ≤ 5	% ≤ 5	% ≤ 5	% ≤ 5	
Maximum heat dissipation (without local I/O)	P _v W 6	P _v W 6	P _v W 6	P _v W 6	
Overvoltage protection	Yes	Yes	Yes	Yes	
Protection against polarity reversal	Yes	Yes	Yes	Yes	
Mains filter (external)	Yes	Yes	Yes	Yes	
Inrush current	x I _n	Not limited, (limiting only by a supply-side 24 V DC PSU)			
Output voltage for signal modules					
Rated value	V DC 5	V DC 5	V DC 5	V DC 5	
Output current	A 3.2	A 3.2	A 3.2	A 3.2	
Short-circuit rating	Yes	Yes	Yes	Yes	
Isolated from supply voltage	No	No	No	No	
CPU					
Microprocessor	Infineon C164	Infineon C164	Infineon C164	Infineon C164	
Memory					
Program code/program data	kByte 64/64	kByte 128/128	kByte 128/128	kByte 256/256	
Marker/retain data	kByte 4/4	kByte 8/8	kByte 8/8	kByte 8/8	
Cycle time for 1 k of instructions (bits, bytes)	ms < 0.5	ms < 0.5	ms < 0.5	ms < 0.5	



		XC-CPU101- C64K-8DI-6DO(-XV)	XC-CPU101- C128K-8DI-6DO(-XV)	XC-CPU101-FC128K-8DI-6DO(-XV)	XC-CPU101- C256K-8DI-6DO(-XV)
Interfaces					
Serial interface (RS232) without handshake lines					
Baud rate	kbit/s	Max. 57.6	Max. 57.6	Max. 57.6	Max. 57.6
Connections		RJ45	RJ45	RJ45	RJ45
Potential isolation		No	No	No	No
CANopen					
Maximum data transfer rate	bit/s	500000	500000	500000	500000
Potential isolation		Yes	Yes	Yes	Yes
Device profile		To DS 301 V4	To DS 301 V4	To DS 301 V4	To DS 301 V4
PDO type		Asyn., cyc., acyc.	Asyn., cyc., acyc.	Asyn., cyc., acyc.	Asyn., cyc., acyc.
Connection		Plug-in terminal block	Plug-in terminal block	Optical fiber interface, wavelength 660 nm, plug e.g. HFBR-4516 Agilent Technologies	Plug-in terminal block
Bus terminating resistors		External	External	External	External
Stations	Number	Max. 126	Max. 126	Max. 126	Max. 126
Watchdog		Yes	Yes	Yes	Yes
RTC (real-time clock)		Yes	Yes	Yes	Yes
Power supply of local inputs/outputs (24 V₀/0 V₀)					
Input voltage	V DC	24	24	24	24
Voltage range	V DC	19.2 - 30, observe polarity	19.2 - 30, observe polarity	19.2 - 30, observe polarity	19.2 - 30, observe polarity
Potential isolation					
Between power supply and CPU voltage		Yes	Yes	Yes	Yes
Overvoltage protection		Yes	Yes	Yes	Yes
Protection against polarity reversal		Yes	Yes	Yes	Yes
Digital inputs					
Input current for channel at rated voltage	mA	Normally 3.5	Normally 3.5	Normally 3.5	Normally 3.5
Heat dissipation for channel		Normally 85 m W	Normally 85 m W	Normally 85 m W	Normally 85 m W
Voltage level to IEC/EN 61131-2		Low < 5 V DC, High > 15 V DC	Low < 5 V DC, High > 15 V DC	Low < 5 V DC, High > 15 V DC	Low < 5 V DC, High > 15 V DC
Limit value type 1					
Input delay					
OFF → ON	ms	Normally 0.1	Normally 0.1	Normally 0.1	Normally 0.1
ON → OFF	ms	Normally 0.1	Normally 0.1	Normally 0.1	Normally 0.1
Inputs	Number	8 (of which 4 interrupt inputs)	8 (of which 4 interrupt inputs)	8 (of which 4 interrupt inputs)	8 (of which 4 interrupt inputs)
Channels with the same reference potential	Number	8	8	8	8
Status indication		LED	LED	LED	LED
Digital outputs					
Channels	Number	6	6	6	6
Heat dissipation for channel	W	0.08	0.08	0.08	0.08
Load circuits	A	0.5	0.5	0.5	0.5
Output delay					
OFF → ON		Normally 0.1 ms	Normally 0.1 ms	Normally 0.1 ms	Normally 0.1 ms
ON → OFF		Normally 0.1 ms	Normally 0.1 ms	Normally 0.1 ms	Normally 0.1 ms
Channels with the same reference potential	Number	6	6	6	6
Status indication		LED	LED	LED	LED
Switching capacity		IEC/EN 60947-5-1, utilization category DC-13	IEC/EN 60947-5-1, utilization category DC-13	IEC/EN 60947-5-1, utilization category DC-13	IEC/EN 60947-5-1, utilization category DC-13
Duty factor	% DF	100	100	100	100
Utilization factor	g	1	1	1	1



	XV-101-K42	XV-101-K84
General		
Standards	IEC/EN 60131-2 EN 50178	IEC/EN 60131-2 EN 50178
Ambient temperature		
Operation		
When mounted vertically, up to 45° fitting angle	°C	0...50
Storage	°C	-20 - 70
Relative humidity, non-condensing (IEC/EN 60068-2-30)	%	10 - 95
Protection type		
Front		IP65
Enclosure		IP20
Vibration resistance		10 - 57 Hz ± 0.075 mm 57 - 150 Hz ±1 g
Mechanical shock resistance		15 g/11 ms
Rated impulse withstand voltage	U _{imp}	V
Overvoltage category		850
Pollution degree		II
Interference immunity		EN 61000-6-2
Emitted interference		EN 50081-2, Class A
Weight	kg	Approx. 0.9
Power supply		
Rated voltage	U _e	V DC
Permissible range		V DC
18...30		18...30
Display		
Backlight		LED
Lifespan of backlight		Operating hours 100000
Character height		5 mm/10 mm
User-definable characters		256
Pushbuttons		
Total number of pushbuttons		29
Keypad service life	Operations	> 3000000
Features		
Memory type		SRAM, 32 KB
Status indication		LED (RUN, STOP, SF)
Expansions		3 XI/OC signal modules
Real-time clock		Yes



XC-CPU121-2C256K			
General			
Standards			IEC/EN 61131-2 EN 50178
Ambient temperature		°C	0 - +55
Storage		°C	-25 to +70
Mounting position			Horizontal
Relative humidity, non-condensing (IEC/EN 60068-2-30)		%	10 - 95
Air pressure (in operation)		hPa	795 - 1080
Vibration resistance			Frequency 5 - 9 Hz; 3.5 mm amplitude 9 - 150 Hz; 1.0 g constant acceleration
Mechanical shock resistance			15 g/11 ms
Oversupply category			II
Pollution degree			2
Degree of protection			IP20
Rated insulation voltage	U _i	V	500
Emitted interference			EN 61000-6-4
Interference immunity			EN 61000-6-2
Backup time			At least 72 hours
Weight		kg	0.15
Electromagnetic compatibility (EMC)			→ Page 14/58
Connections			
Supply voltage			
Connection type			-
Terminal capacity		mm ²	0.14 - 1 (AWG28-18)
COM1 interface			RJ45
Connection type			
COM2, CAN1, CAN2 interfaces			Spring-loaded terminal block, 6pole
Connection type			
Terminal capacity		mm ²	0.14 - 0.5 (AWG28-20)
Power supply			
Input voltage		V DC	24
Permissible range		V DC	20.4...28.8
Input power		W	Max. 1.44
Input current		mA	60
Ripple		%	≤ 5
Maximum heat dissipation (without local I/O)	P _v	W	6
Oversupply protection			Yes
Protection against polarity reversal			Yes
Inrush current		x I _n	No limitation (limited only by upstream 24 V DC power supply unit)
Supply failure bridging			
Duration of power failure		ms	10
Repetition rate		s	1
External supply filter			Part No.: XT-FIL-1, → Page 14/41
Memory			
Program code/program data		kByte	256/244
Marker/input/output/retain data		kByte	16/4/4/8
Cycle time for 1 k of instructions (bits, bytes)		ms	< 0.3
Interfaces			
Serial interface (RS232) without handshake lines			
Baud rate		kbit/s	-
Baud rate		kbit/s	Programming (character format: 8 data bits, No parity, 1 stop bit) 19.2, 38.4 (default), 57.6
Connector type			RJ45
Potential isolation			No
In transparent mode			
Baud rate		kbit/s	0.3, 0.6, 1.2, 2.4, 4.8, 9.6, 19.2, 38.4, 57.6, 115.2
Character formats			8E1, 8O1, 8N1, 8N2, 7E2, 7O2, 7N2, 7E1
Number of Send bytes for block			190
Number of Receive bytes for block			190



XC-CPU121-2C256K		
COM2 (RS232/RS485) without handshake lines		
Baud rate	kbit/s	Transparent mode (setting through function blocks) 0.3, 0.6, 1.2, 2.4, 4.8, 9.6, 19.2, 38.4, 57.6
Character formats		8E1, 8O1, 8N1, 8N2, 7E2, 7O2, 7N2, 7E1 (setting through function blocks)
Potential isolation		No
Bus termination		External, for RS485
CAN1/CAN2 interface		
Baud rate	kbit/s	10 ... 500
Potential isolation		No
Stations		126
Bus termination		Adjustable for each interface (CAN1/CAN2)
PDO type		Asyn., cyc., acyc.
Power supply of local inputs/outputs (24 V₀/0 V₀)		
Input voltage	V DC	24
Voltage range	V DC	19.2 - 30, observe polarity
Potential isolation		
Between power supply and CPU voltage		Yes
Overvoltage protection		Yes



XIO-EXT121-1**General**

Standards			IEC/EN 61131-2 EN 50178
Ambient temperature	°C	0 - +55	
Storage	°C	-25 to +70	
Mounting position		Horizontal	
Relative humidity, non-condensing (IEC/EN 60068-2-30)	%	10 - 95	
Air pressure (in operation)	hPa	795 - 1080	
Vibration resistance		Frequency 5 - 9 Hz; 3.5 mm amplitude 9 - 150 Hz; 1.0 g constant acceleration	
Mechanical shock resistance		15 g/11 ms	
Overvoltage category		II	
Pollution degree		2	
Degree of protection		IP20	
Rated insulation voltage	U _i	V	500
Emitted interference			EN 61000-6-4
Interference immunity			EN 61000-6-2
Backup time			At least 72 hours
Weight	kg	0.15	

Electromagnetic compatibility (EMC)

→ Page 14/58

Connections

X1 connector

Connector type		Spring-loaded terminal block, 20 pole, B2L 3.5 (Weidmüller)
Terminal capacity (solid)	mm ²	0.5 - 1

X2/X3 connector

Connector type		Spring-loaded terminal block, 10 pole, BLZF 3.5/180 or BLI/O 3.5/10F with LEDs (Weidmüller)
Terminal capacity (solid)	mm ²	0.5 - 1

Power supply

Supply failure bridging

Duration of power failure	ms	10
Repetition rate	s	1

Input voltage

Permissible range	V DC	24
	V DC	20.4...28.8

Input power

Input current	W	Max. 1.68
	mA	70

Ripple

Overvoltage protection	%	≤ 5
Protection against polarity reversal		Yes

Inrush current	x I _n	Max. 1 A
----------------	------------------	----------

Output voltage for signal modules

Max. field current IL	A	2
-----------------------	---	---

Digital inputs

Number		X2: 9 with plug BLI/O 3.5/10F or 10 with plug BLZF 3.5/180 X3: 8 (can also be used as outputs)
--------	--	---

Rated voltage

Rated voltage	U _e	V DC	24
At state "0"	U _e	V DC	< 5
At state "1"	U _e	V DC	> 15

Rated operational current

At state "1"	I _e	mA	3.3
--------------	----------------	----	-----

Delay time

X2: DI0...DI3	μs	20
X2: DI4...DI9	μs	250
X2: DX0...DX7	ms	20

Potential isolation		No
---------------------	--	----



XIO-EXT121-1**Digital outputs**

Number	At X3: 8 (can also be used as inputs)		
--------	---------------------------------------	--	--

Rated voltage

Rated voltage	U_e	V DC	24
Permissible range			20.4 ... 28.8 V DC
Ripple	%		≤ 5

Rated operational current

At state "1"	I_e	A	0.5 at 24 V AC
Utilization factor	%	g	1
Maximum duty factor		ms	100 %

Lamp load without R_v

Lamp load without R_v	W	5
Potential isolation		No

Residual current at state "0" per channel

Residual current at state "0" per channel	mA	< 0.1
---	-------------	-------

Max. output voltage

At state "0" with external load < 10 MΩ	V	2.5
At state "1" at $I_e = 0.5 \text{ A}$	V	$U = U_e - 1 \text{ V}$

Short-circuit tripping current

Short-circuit tripping current for $R_a \leq 10 \text{ m}\Omega$	A	$0.7 \leq I_e \leq 2$ for output
Total short-circuit current	A	16
Peak short-circuit current	A	32

Max. operating frequency

Max. operating frequency	Ops/h	40000
--------------------------	-------	-------

Parallel connection capability

Parallel connection capability		Yes
--------------------------------	--	-----

Analog inputs 0...10 V

Number of channels		2
Primary voltage range	V	0...10
Resolution	bit	10
Conversion time	ms	≤ 5
Overall accuracy		$\leq \pm 1\%$ (of full-scale value)
Input resistance	kΩ	200

Analog inputs 0...20 mA

Number of channels		2
Primary voltage range	mA	0...20
Resolution	bit	10
Conversion time	ms	≤ 5
Overall accuracy		$\leq \pm 1\%$ (of full-scale value)
Input resistance	Ω	50

Pt100 RTD

Number of channels		2
Temperature range	°C	-200...+200
Resistance range	Ω	18.5...175.8
Resolution	bit	10
Overall accuracy		$\leq \pm 2\%$

Analog outputs

Number of channels		2
Secondary voltage range	V	0...10
Resolution	bit	12
Conversion time	ms	≤ 5
Overall accuracy		$\leq \pm 1\%$ (of full-scale value)
External load resistance	R	kΩ



	XC-CPU201-EC256K-8DI-6DO(-XV)	XC-CPU201-EC512K-8DI-6DO(-XV)	XC-CPU202-EC4M-8DI-6DO-XV
General			
Standards	IEC/EN 61131-2 EN 50178	IEC/EN 61131-2 EN 50178	IEC/EN 61131-2 EN 50178
Ambient temperature	°C 0 - +55	°C -25 to +70	°C 0 - +55
Storage	°C -25 to +70	Horizontal	-25 to +70
Mounting position	Horizontal	Horizontal	Horizontal
Relative humidity, non-condensing (IEC/EN 60068-2-30)	% 10 - 95	10 - 95	10 - 95
Air pressure (in operation)	hPa 795 - 1080	795 - 1080	795 - 1080
Vibration resistance	10 - 57 Hz ±0.075 mm 57 - 150 Hz ±1.0 g	10 - 57 Hz ±0.075 mm 57 - 150 Hz ±1.0 g	10 - 57 Hz ±0.075 mm 57 - 150 Hz ±1.0 g
Mechanical shock resistance	15 g/11 ms	15 g/11 ms	15 g/11 ms
Overvoltage category	II	II	II
Pollution degree	2	2	2
Degree of protection	IP20	IP20	IP20
Rated impulse withstand voltage	U _{imp} V 850	850	850
Emitted interference	EN 61000-6-4, Class A	EN 61000-6-4, Class A	EN 61000-6-4, Class A
Interference immunity	EN 61000-6-2	EN 61000-6-2	EN 61000-6-2
Battery (lifespan)	Normally 5 years	Normally 5 years	Normally 5 years
Weight	kg 0.23	0.23	0.23
Terminals	Plug-in terminal block	Plug-in terminal block	Plug-in terminal block
Terminal capacity			
Screw terminals			
Flexible with ferrule	mm ² 0.5 - 1.5	0.5 - 1.5	0.5 - 1.5
Solid	mm ² 0.5 - 2.5	0.5 - 2.5	0.5 - 2.5
Spring-cage terminal			
Flexible	mm ² 0.34 - 1.0	0.34 - 1.0	0.34 - 1.0
Solid	mm ² 0.14 - 1.0	0.14 - 1.0	0.14 - 1.0
Electromagnetic compatibility (EMC)		→ Page 14/58	
Power supply			
Duration of mains failure	ms 10	10	10
Repetition rate	s 1	1	1
Input voltage	V DC 24	24	24
Permissible range	V DC 20.4...28.8	20.4...28.8	20.4...28.8
Input power	W Max. 33	Max. 33	Max. 33
Ripple	% ≤ 5	≤ 5	≤ 5
Maximum heat dissipation	P _v W 6	6	6
Overvoltage protection	Yes	Yes	Yes
Protection against polarity reversal	Yes	Yes	Yes
Line filter	Yes	Yes	Yes
Inrush current	x I _n	Not limited, (limiting only by a supply-side 24 V DC PSU)	
Output voltage for signal modules			
Rated value	V DC 5	5	5
Output current	A 3.2	3.2	3.2
Short-circuit rating	Yes	Yes	Yes
Isolated from supply voltage	No	No	No
CPU			
Microprocessor	NEC VR4181 A MIPS	NEC VR4181 A MIPS	ARM 532 MHz
Memory			
Program code/program data	256 kByte/256 kByte	2 MB/512 kByte	4 MB/512 kByte
Marker/retain data	kByte 16/32	16/32	16/64
Cycle time for 1 k of instructions (bits, bytes)	ms < 0.15	< 0.15	< 0.025



		XC-CPU201-EC256K-8DI-6DO(-XV)	XC-CPU201-EC512K-8DI-6DO(-XV)	XC-CPU202-EC4M-8DI-6DO-XV
Interfaces				
Ethernet				
Baud rate	MBit/s	10/100 - Autodetect	10/100 - Autodetect	10/100 - Autodetect
Connector type		RJ45	RJ45	RJ45
Potential isolation		No	No	No
Serial interface (RS232) without handshake lines				
Baud rate	kbit/s	Max. 115.2	Max. 115.2	Max. 115.2
Connector type		RJ45	RJ45	RJ45
Potential isolation		No	No	No
USB interface		1.0	1.0	2.0
CANopen				
Maximum data transfer rate	MBit/s	1	1	1
Potential isolation		Yes	Yes	Yes
Device profile		To DS 301 V4	To DS 301 V4	To DS 301 V4
PDO type		Asyn., cyc., acyc.	Asyn., cyc., acyc.	Asyn., cyc., acyc.
Connection		Plug-in terminal block	Plug-in terminal block	Plug-in terminal block
Bus terminating resistors		External	External	internal
Stations	Number	Max. 126	Max. 126	Max. 126
Watchdog		Yes	Yes	Yes
RTC (real-time clock)		Yes	Yes	Yes
Power supply of local inputs/outputs (24 V₀/0 V₀)				
Input voltage	V DC	24	24	24
Voltage range	V DC	19.2 - 30, observe polarity	19.2 - 30, observe polarity	19.2 - 30, observe polarity
Potential isolation				
Between power supply and CPU voltage		Yes	Yes	Yes
Between power supply and inputs/outputs		No	No	No
Status indication		LED	LED	LED
Terminals		Plug-in terminal block	Plug-in terminal block	Plug-in terminal block
Oversupply protection		Yes	Yes	Yes
Protection against polarity reversal		Yes	Yes	Yes
Digital inputs				
Input current per channel at rated voltage	mA	Normally 3.5	Normally 3.5	Normally 3.5
Heat dissipation per channel		Normally 85 m W	Normally 85 m W	Normally 85 m W
Voltage level to IEC/EN 61131-2				
Limit value type 1		Low < 5 V DC, High > 15 V DC	Low < 5 V DC, High > 15 V DC	Low < 5 V DC, High > 15 V DC
Input delay				
OFF → ON	ms	Type 0.1	Type 0.1	Type 0.1
ON → OFF	ms	Type 0.1	Type 0.1	Type 0.1
Inputs	Number	8, of which parameterizable:	2 counters, 50 kHz, 2 interrupt inputs, 1 incremental input	
Channels with the same reference potential	Number	8	8	8
Status indication		LED	LED	LED
Digital outputs				
Channels	Number	6	6	6
Heat dissipation per channel	W	0.08	0.08	0.08
Load circuits	A	0.5	0.5	0.5
Output delay				
OFF → ON		Normally 0.1 ms	Normally 0.1 ms	Normally 0.1 ms
ON → OFF		Normally 0.1 ms	Normally 0.1 ms	Normally 0.1 ms
Channels with the same reference potential	Number	6	6	6
Status indication		LED	LED	LED
Switching capacity		IEC/EN 60947-5-1, utilization category DC-13		
Duty factor	% DF	100	100	100
Utilization factor	g	1	1	1



General		
Standards		IEC/EN 61131-2 EN 50178
Ambient temperature	°C	0 - +55
Storage	°C	-25 to +70
Vibration resistance		10 - 57 Hz ± 0.075 mm 57 - 150 Hz ± 1.0 g
Mechanical shock resistance		15 g/11 ms
Impact strength		500 g/50 mm ±25 g
Overvoltage category		II
Pollution degree		2
Protection class		1
Protection type		IP20
Emitted interference		DIN/EN 55011/22, Class A
Electromagnetic compatibility (EMC)		
→ Page 14/58		
Power supply		
Rated voltage	U _e	V DC
Permissible range		24 (12)
Ripple	%	20.4 – 28.8 (11.8 – 14.4)
Supply failure bridging		≤ 5
Duration of power failure	ms	10
Repetition rate	s	1

	XIOC-8DI	XIOC-16DI	XIOC-32DI
Modules			
Input type	DC input	DC input	DC input
Input voltage	V DC	24	24
Permissible range	V DC	20.4...28.8	20.4...28.8
Input voltage	V AC	–	–
Permissible range	V AC		
Input resistance		Normally 3.5 kΩ	Normally 5.9 kΩ
Input current	mA	Normally 6.9	Normally 4.0
Voltage level to IEC 61131-2, limit value type 1			
ON	V	≥ 15 DC	≥ 15 DC
OFF	V	≤ 5 DC	≤ 5 DC
Input delay			
OFF → ON	ms	5 (normally 4)	5 (normally 4)
OFF → ON	ms	5 (normally 4)	5 (normally 4)
Input channels	Number	8	16
Channels with the same reference potential	Number	8	16
Potential isolation		With optocouplers	With optocouplers
Indication		LED (green)	LED (green)
Terminals		Plug-in terminal block	Plug-in terminal block
Internal current consumption (5 V DC)	mA	Normally 26	Normally 51
Weight	kg	0.16	0.16



		XIOC-8DO	XIOC-16DO	XIOC-16DO-S	XIOC-32DO
Modules					
Output type		Transistor (source type)			
Output voltage	V DC	24 (-15...+20 %)	24 (-15...+20 %)	24 (-15...+20 %)	24 (-15...20 %)
Switching current, minimum	mA	1	1	1	1
Leakage current	mA	0.1	0.1	0.1	0.1
Maximum load current					
Per circuit	A	0.3	0.3	0.8	0.2
Per common potential terminal	A	2.4	4	5	3.2
Output delay					
OFF → ON	ms	≤ 0.3	≤ 0.3	≤ 0.3	≤ 0.3
OFF → ON	ms	≤ 1	≤ 1	≤ 1	≤ 1
Output channels	Number	8	16	16	32
Channels with the same reference potential	Number	8	16	16	32
Overvoltage protection		Diode	Diode	Integrated	Diode
Fuse rating	A	4	8	None	8
Potential isolation		With optocouplers			
Indication		LED (green)	LED (green)	LED (green)	16 LEDs (green), switchable: 0 – 15, 16 – 31
Terminals		Plug-in terminal block			XIOC-TERM32 (connector and cable)
Internal current consumption (5 V DC)	mA	Normally 30	Normally 50	Normally 50	Normally 250
External voltage for outputs/module (30 mA for module supply)	U _s V	24 DC (-15/+20%)	24 DC (-15/+20%)	24 DC (-15/+20%)	24 DC (-15/+20%)
Short-circuit protection		–	–	Yes	–
Weight	kg	0.16	0.16	0.16	0.16

XIOC-12DO-R

Modules					
Output type		Relays			
Output voltage	V DC	24			
Output voltage	V AC	100/240			
Switching current, minimum	mA	1			
Maximum load current					
Per circuit	A	2			
Per common potential terminal	A	5			
Output delay					
OFF → ON	ms	≤ 10			
OFF → ON	ms	≤ 10			
Output channels	Number	12			
Channels with the same reference potential	Number	12			
Overvoltage protection		External			
Fuse rating	A	External			
Potential isolation		With optocouplers			
Indication		LED (green)			
Terminals		Plug-in terminal block			
Internal current consumption (5 V DC)	mA	Normally 40			
External voltage for operating the relay		24 V DC (-15 - +20%, max. 70 mA)			
Weight	kg	0.2			

XIOC-16DX		
Power supply		
Supply voltage		24 V DC (-15/+20%)
Ripple	%	≤ 5
Oversupply protection		Yes
Protection against polarity reversal		Yes
Potential isolation		
Between power supply and I/O bus		Yes
Between power supply and I/O		No
Internal current consumption (5 V DC)	mA	Normally 80
Channels	Number	16
Terminals		Plug-in terminal block
Status indication		LED
Inputs		
Input type		DC input
Input voltage	V DC	24 V DC
Inputs	Number	4, 12, configurable
Input current	mA	Normally 4
Voltage level to IEC 61131-2, limit value type 1		
ON	V	≥ 15 DC
OFF	V	≤ 5 DC
Input delay		
OFF → ON	ms	Normally 0.1
ON → OFF	ms	Normally 0.1
Outputs		
Output type		Transistor (source type)
Output voltage	V DC	12/24 (-15...+20 %)
Output current	A	Normally 0.5
Outputs	Number	Max. 12, configurable
Short-circuit tripping current	A	Max. 1.2 over 3 ms for output
Lamp load	W	Max. 3
Drop-out delay (High → Low)	μs	Normally 100
Switching capacity		IEC/EN 60947-5-1, utilization category DC-13
Short-circuit rating		Yes
Parallel connection of outputs		In groups 0 – 3, 4 – 7, 8 – 11; Actuation of the outputs within a group only in the same program cycle
Number of outputs that can be switched in parallel		Max. 3
Total maximum current	A	2 for group
Weight	kg	0.16



		XIOC-8AI-I2	XIOC-8AI-U1	XIOC-8AI-U2	XIOC-4T-Pt
Modules					
Input voltage	V DC	–	0 to 10	-10 to +10	–
Input current	mA	4 - 20	–	–	–
Resolution, digital	bit	12	12	12	15 bit with sign
Conversion time		≤ 5 ms	≤ 5 ms	≤ 5 ms	
Total errors	%	≤ ± 1 (of full-scale value)		–	
Input resistance	kΩ	–	100	100	–
Potential isolation		With optocouplers			
Circuit within each channel		No	No	No	no
Between the input channels		8	8	8	4
Input channels	Number	Plug-in terminal block			
Terminals		24 V DC (-15/+20 %), approx. 150 mA			
External power supply		–	–	–	24 V DC (-15/+20 %), 100 mA
External resistance	R	kΩ	2-core shielded cable (≤20 m)		max 0.4, 4 channels
Connection type			Platinum RTD		Shielded cable
Platinum RTD			–	–	Pt100 (IEC 751), Pt1000
Accuracy					
-20 to 40 °C (Pt100)	°C	–	–	–	±0.5
-50 to 400 °C (Pt100)	°C	–	–	–	±3
-50 to 400 °C (Pt1000)	°C	–	–	–	±6
Temperature measuring range		–	–	–	-20 to +40 °C/-50 to +400 °C (uninterrupted current: 2 mA)
Internal current consumption (5 V DC)	mA	Normally 100	Normally 100	Normally 100	Max. 200
Additional function		–	–	–	Linearisation
Fault detection					
-20 to 40 °C		–	–	–	≤ -25 °C or ≥ +45 °C = resistance value 7FFFhex
-50 to 400 °C		–	–	–	≤ -60 °C or ≥ +410 °C = resistance value 7FFFhex
Response to cable break or unused inputs		–	–	–	In these cases, the resistance value is 7FFFhex
Weight	kg	0.18	0.18	0.18	0.18

	XIOC-4AI-T
Channels	
Number	4
Temperature measuring range	Type K: -270...1370 Type J: -210...1200 Type B: 100...1800 Type N: -270...1300 Type E: -270...1000 Type R: -50...1760 Type T: -200...400
Voltage measurement	- 50 mV...50 mV -100 mV...100 mV -500 mV...500 mV -1000 mV...1000 mV
cold-junction compensation	Yes, built-in
Interference suppression	50 Hz, 60 Hz
Unit	0.1 °C, 0.1 F
Resolution	bit
Total errors	%
Conversion time	< 1 s
Temperature coefficient	< 200 ppm/°C of measurement range

	XIOC-2AO-U1-2AO-I2	XIOC-4AO-U1	XIOC-2AO-U2
Modules			
Output voltage	V DC	0 - 10	0 - 10
Output current	mA	4 - 20	—
Resolution	bit	12	12
Conversion time		≤ 5 ms	≤ 5 ms
Total errors	%	≤ ± 1 (of full-scale value)	
External load resistance			
Voltage output		≥ 10 kΩ	≥ 10 kΩ
Current output	Ω	0 to 500 Ω	—
Potential isolation			
Circuit within each channel		With optocouplers	
Between channels		No	No
Number of outputs			
Output voltage		2 (channels 0 and 1)	4
Output current		2 (channels 2 and 3)	—
Terminals			
Internal current consumption (5 V DC)	mA	Normally 100	Normally 100
External power supply		24 V DC (-15/+20 %), approx. 150 mA	
Connection type		2-core shielded cable (≤ 20 m)	

	XIOC-2AI-1AO-U1	XIOC-2AI-1AO-U1-I1	XIOC-4AI-2AO-U1	XIOC-4AI-2AO-U1-I1
Inputs				
Input voltage	V DC	0 - 10	0 - 10	0 - 10
Input current	mA	—	0 - 20	0 - 20
Resolution	bit	14	14	14
Conversion time		< 1 ms	< 1 ms	< 1 ms
Total errors	%	Normally 0.4	Normally 0.4	Normally 0.4
Potential isolation				
Circuit within each channel		No	No	No
Between the input channels		No	No	No
Between input/output channels		No	No	No
Channels	Number	2	2	4
Input resistance	kΩ	40	40	40
Outputs				
Output voltage	V DC	0 - 10	0 - 10	0 - 10
Output current	mA	—	0 - 20	0 - 20
Resolution	bit	12	12	12
Errors		Normally 0.4 %	Normally 0.4 %	Normally 0.4 %
Potential isolation				
Circuit within each channel		No	No	No
Between the output channels		No	No	No
Number of channels		1	1	2
External load resistance		≥ 2 kΩ	≥ 2 kΩ	≥ 2 kΩ
Short-circuit rating		Yes	Yes	Yes
Terminal connection				
Terminals		Plug-in terminal block	Plug-in terminal block	Plug-in terminal block
Internal current consumption (5 V DC)	mA	Normally 200	Normally 200	Normally 200
Weight	kg	0.16	0.16	0.16



	XIOC-NET-DP-M	XIOC-NET-DP-S	XIOC-NET-SK-M	XIOC-SER	XIOC-TC1
Interfaces					
Interfaces	PROFIBUS-DP, RS485, EN 50170	PROFIBUS-DP, RS485, EN 50170	RS485	RS232(C), RS422, RS485	RS232(C), RS422, RS485
Protocol	PROFIBUS-DP master (class 1)	PROFIBUS-DP slave	Suconet K, K1	Transparent mode, Modbus master/slave, SUCOM-A, Suconet-K slave	Transparent mode, Modbus Master/Slave, SUCOM-A, DNP3 protocol
Character formats	–	–	–	8E1, 8O1, 8N1, 8N2, 7E2, 7O2, 7N2, 7E1	8E1, 8O1, 8N1, 8N2, 7E2, 7O2, 7N2, 7E1
Control and signal cables	–	–	–	RTS, CTS, DTR, DSR, DCD	RTS, CTS, DTR, DSR, DCD
Transfer rate	kbit/s	9.6 to 12000	9.6 to 12000	187.5, 375	0.3 ... 57.6 187.5, 375 (Suconet)
Potential isolation	Yes	Yes	Yes	Yes (RS485, RS422)	Yes (RS485, RS422)
Number of slaves	124	–	16	–	–
Send/receive data	3500 Byte each	Max. 244 Byte	250 Byte each	250 Byte per slave 120 Byte per slave (Suconet-K slave)	250/500
Bus terminating resistors	Switchable	Switchable	Switchable	Switchable for RS485, RS422	Switchable for RS485, RS422
Connector type	D-sub 9-pin socket	D-sub 9-pin socket	Plug-in terminal block	RS232: D-sub 9-pin RS485, 422: plug-in terminal block	RS232: D-sub 9-pin RS485, 422: plug-in terminal block
Current consumption	mA	< 300	< 300	< 275	< 275
Weight	kg	Approx. 0.2	Approx. 0.2	Approx. 0.2	Approx. 0.2
Number of modules		XC100: 1 XC200: 3	XC100: 1 XC200: 3	XC100: 2 XC200: 4	XC200: 4
Slots		1, 2, 3	1, 2, 3	Any	Any



		XIOC-1CNT-100KHZ	XIOC-2CNT-100KHZ	XIOC-2CNT-2AO-INC
Inputs				
Counter limits		0 - 4294967295 (32 bit)	0 - 4294967295 (32 bit)	0 - 4294967295 (32 bit)
Internal current consumption	mA	200	200	450
Frequency	kHz	100 (25 with four times resolution)	100 (25 with four times resolution)	400 (100 with four times resolution)
Number of channels		1	2	2
Input voltage	V DC	12 - 24	12 - 24	-
Voltage for ON	V DC	> 10	> 10	-
Voltage for OFF	VA/W	< 4	< 4	-
Input current	mA	≥ 4	≥ 4	-
Differential input voltage	V DC	± 5	± 5	± 5
Voltage for ON	V DC	2 - 5	2 - 5	0.2 - 5
Voltage for OFF	V DC	-5 - 8	-5 - 8	-5 - -0.2
Differential input current	mA	35	35	5
Minimum pulse width	μs	ON ≥ 4 OFF ≥ 4	ON ≥ 4 OFF ≥ 4	-
Potential isolation		With optocouplers	With optocouplers	-
Connection for external cabling		30-pin plug: XIOC-TERM30-CNT4	30-pin plug: XIOC-TERM30-CNT4	Plug-in terminal block
External cabling		Shielded, twisted pair cable	Shielded, twisted pair cable	Shielded, twisted pair cable
Outputs				
Output type		Transistor (open collector)	Transistor (open collector)	Analog
External power supply		12/24 V DC (30 max.)	12/24 V DC (30 max.)	-
Minimum load current	mA	1	1	-
Maximum load current	I _o	mA	20	-
Max. leakage current		mA	0.5	-
Max. voltage drop at ON		V	1.5	-
Debounce OFF				
OFF → ON		ms	≤ 1	-
OFF → ON		ms	≤ 1	-
Output channels		Number	2	2
Potential isolation		With optocouplers	With optocouplers	-
Output voltage	V DC	-	-	-10 - 10
Resolution	bit	-	-	12
Conversion time		-	-	≤ 1 ms
Total errors	%	-	-	Normally 0.4
Load resistance		-	-	≥ 1 kΩ
Connection for external cabling		30-pin plug: XIOC-TERM30-CNT4	30-pin plug: XIOC-TERM30-CNT4	Plug-in terminal block
External cabling		Shielded, twisted pair cable	Shielded, twisted pair cable	Shielded 2-core cable
Current per channel	mA	-	-	≤ 300
Power supply of encoders		-	-	5 V DC
Current consumption	mA	200	200	Max. 450
Weight	kg	0.16	0.16	0.18




		XT-FIL-1	XT-FIL-2
General			
Standards		IEC/EN 61131-2 EN 50178	IEC/EN 61131-2 EN 50178
Ambient temperature	°C	0 - +55	0 - +55
Storage	°C	-25 - +70	-25 - +70
Mounting position		Vertical or horizontal	Vertical or horizontal
Vibration resistance		10 - 57 Hz ± 0.075 mm 57 - 150 Hz ± 1.0 g	10 - 57 Hz ± 0.075 mm 57 - 150 Hz ± 1.0 g
Mechanical shock resistance		15 g/11 ms	15 g/11 ms
Impact strength		500 g /50 mm ±25 g	500 g/50 mm ±25 g
Oversupply category		II	II
Pollution degree		2	2
Protection type		IP20	IP20
Rated impulse withstand voltage	U _{imp}	V	850
Interference immunity		EN 61000-6-2	EN 61000-6-2
Weight	kg	0.1	0.1
Dimensions (W x H x D)	mm	35 x 90 x 30	35 x 90 x 57
Terminals		Screw terminals	Screw terminals
Terminal capacity			
Screw terminals			
Flexible with ferrule		mm ²	0.2 - 2.5 (AWG22 - 12)
Solid		mm ²	0.2 - 2.5 (AWG22 - 12)
Power supply			
Input voltage	V DC	24	24
Permissible range	V DC	20.4...28.8	20.4...28.8
Ripple	%	≤ 5	≤ 5
Mains oversupply protection		Yes	Yes
Potential isolation			
Between input voltage and PE		Yes	Yes
Between input voltage and output voltage		No	No
Between output voltage and PE		Yes	Yes
Rated value	V DC	24	24
Output current	A	2.2	12

General information on electromagnetic compatibility (EMC) of automation systems


Emitted interference	EN 55011/22 Class A (VDE 0875, Part 11)		
Interference immunity			
ESD	IEC/EN 61000-4-2	Contact discharge Air discharge	4 kV 8 kV
RFI	IEC/EN 61000-4-3	AM (80 %)	80 - 1000 MHz 10 V/m
Mobile phones/cellphones	IEC/EN 61000-4-3	PM	800 - 960 MHz 10 V/m
Burst	IEC/EN 61000-4-4	Mains/digital I/O (direct) Analog I/O, fieldbus (capacitive coupling)	2 kV 1 kV
Surge	IEC/EN 61000-4-5	Digital I/O, asymmetric, analog I/O, asymmetric, connection to shielding Mains DC, asymmetric Mains DC, symmetric Mains AC, asymmetric Mains AC, symmetric	0.5 kV 1 kV 1 kV 0.5 kV 2 kV 1 kV
Conducted interference, induced by high-frequency fields	IEC/EN 61000-4-6; 2003	AM (80 %)	150 kHz - 80 MHz 3 V

Dimensions

XC-CPU101
XC-CPU201
XC-CPU202

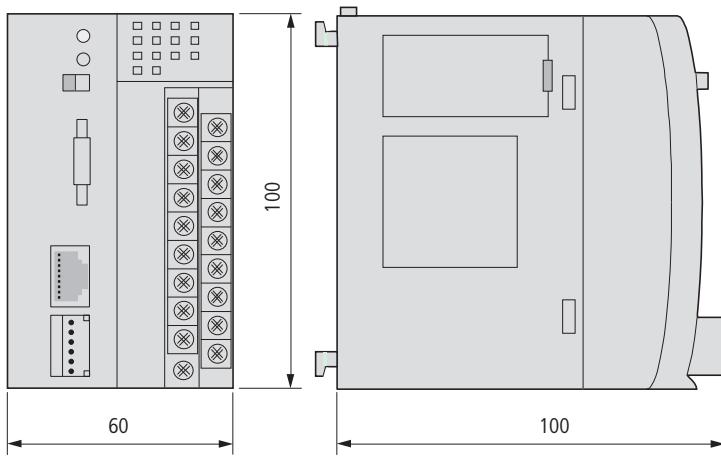


XIOC...


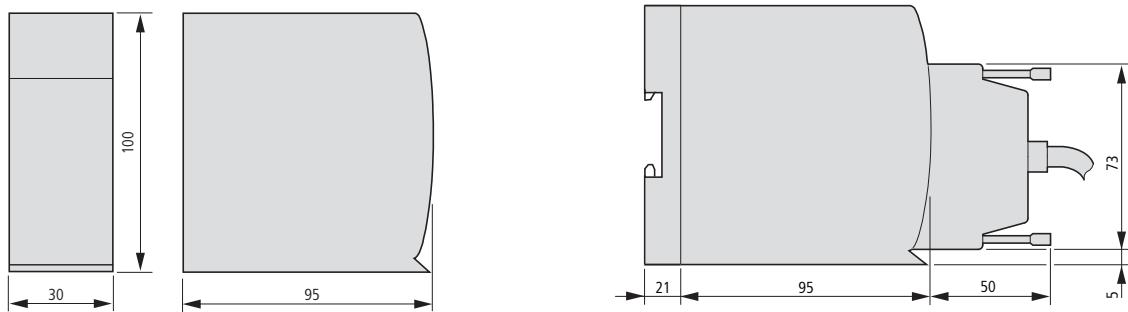


Backplanes


XIOC-BP-2
XIOC-BP-XC

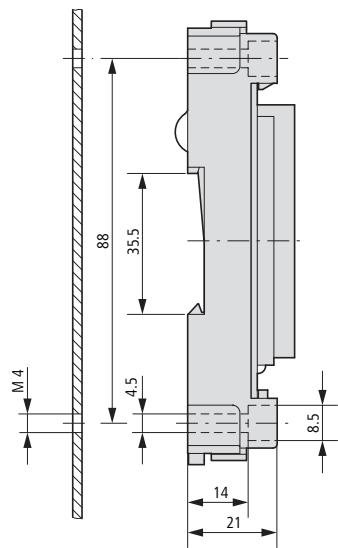


XIOC-BP-3
XIOC-BP-EXT
XIOC-BP-XC1

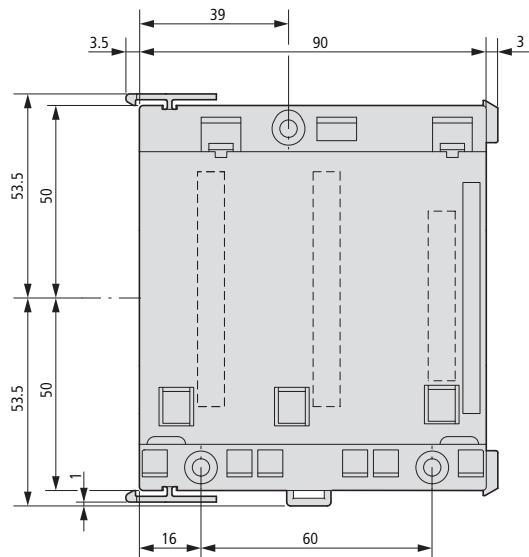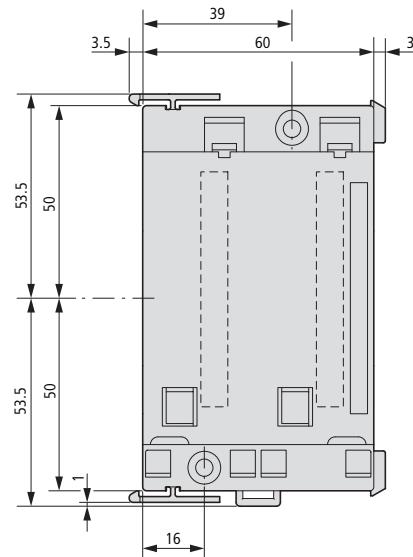

XV-101...

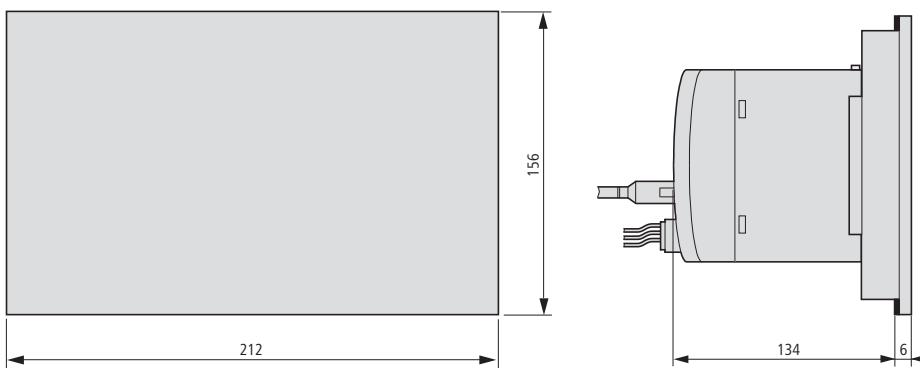



Mounting dimensions

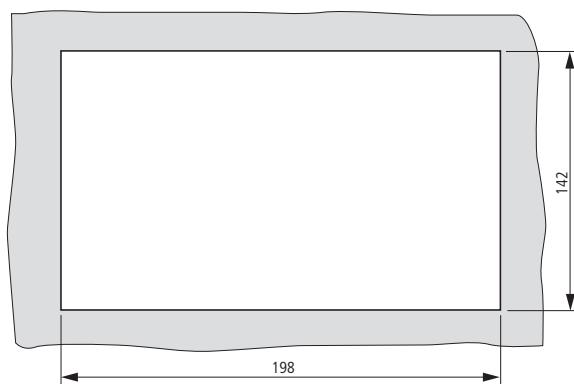


XC-CPU-121...

XIO-EXT121-1


XT-RJ45-ETH-RS232

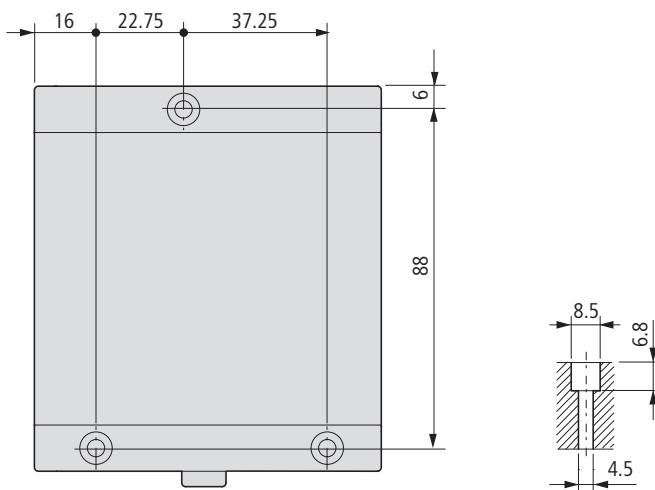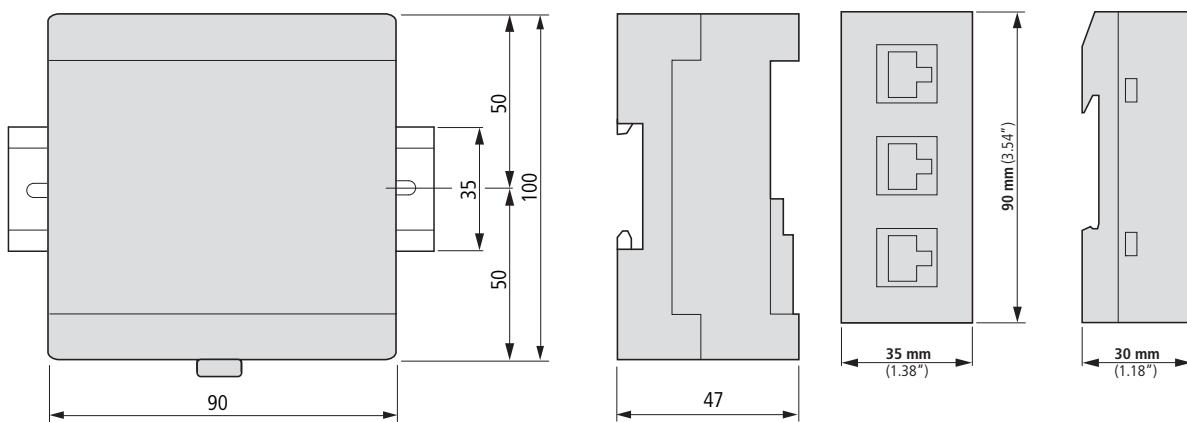


XT-FIL-1

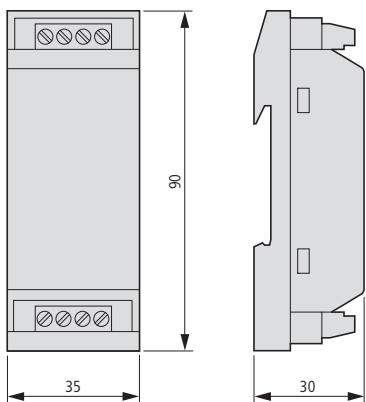

XT-FIL-2

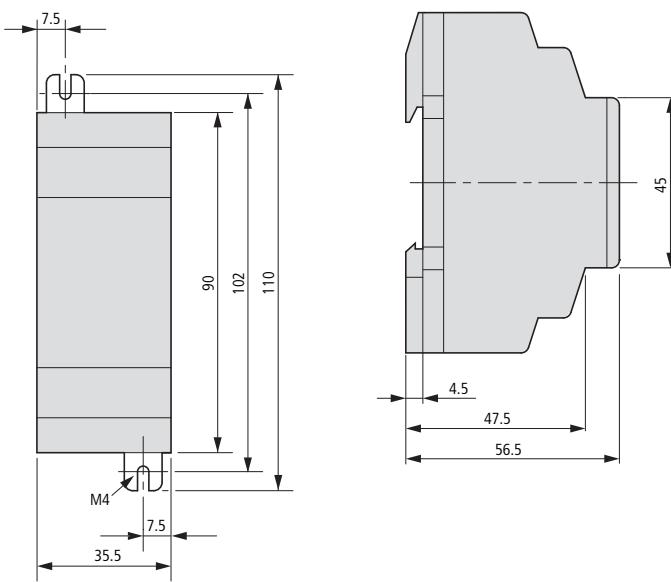



System overview

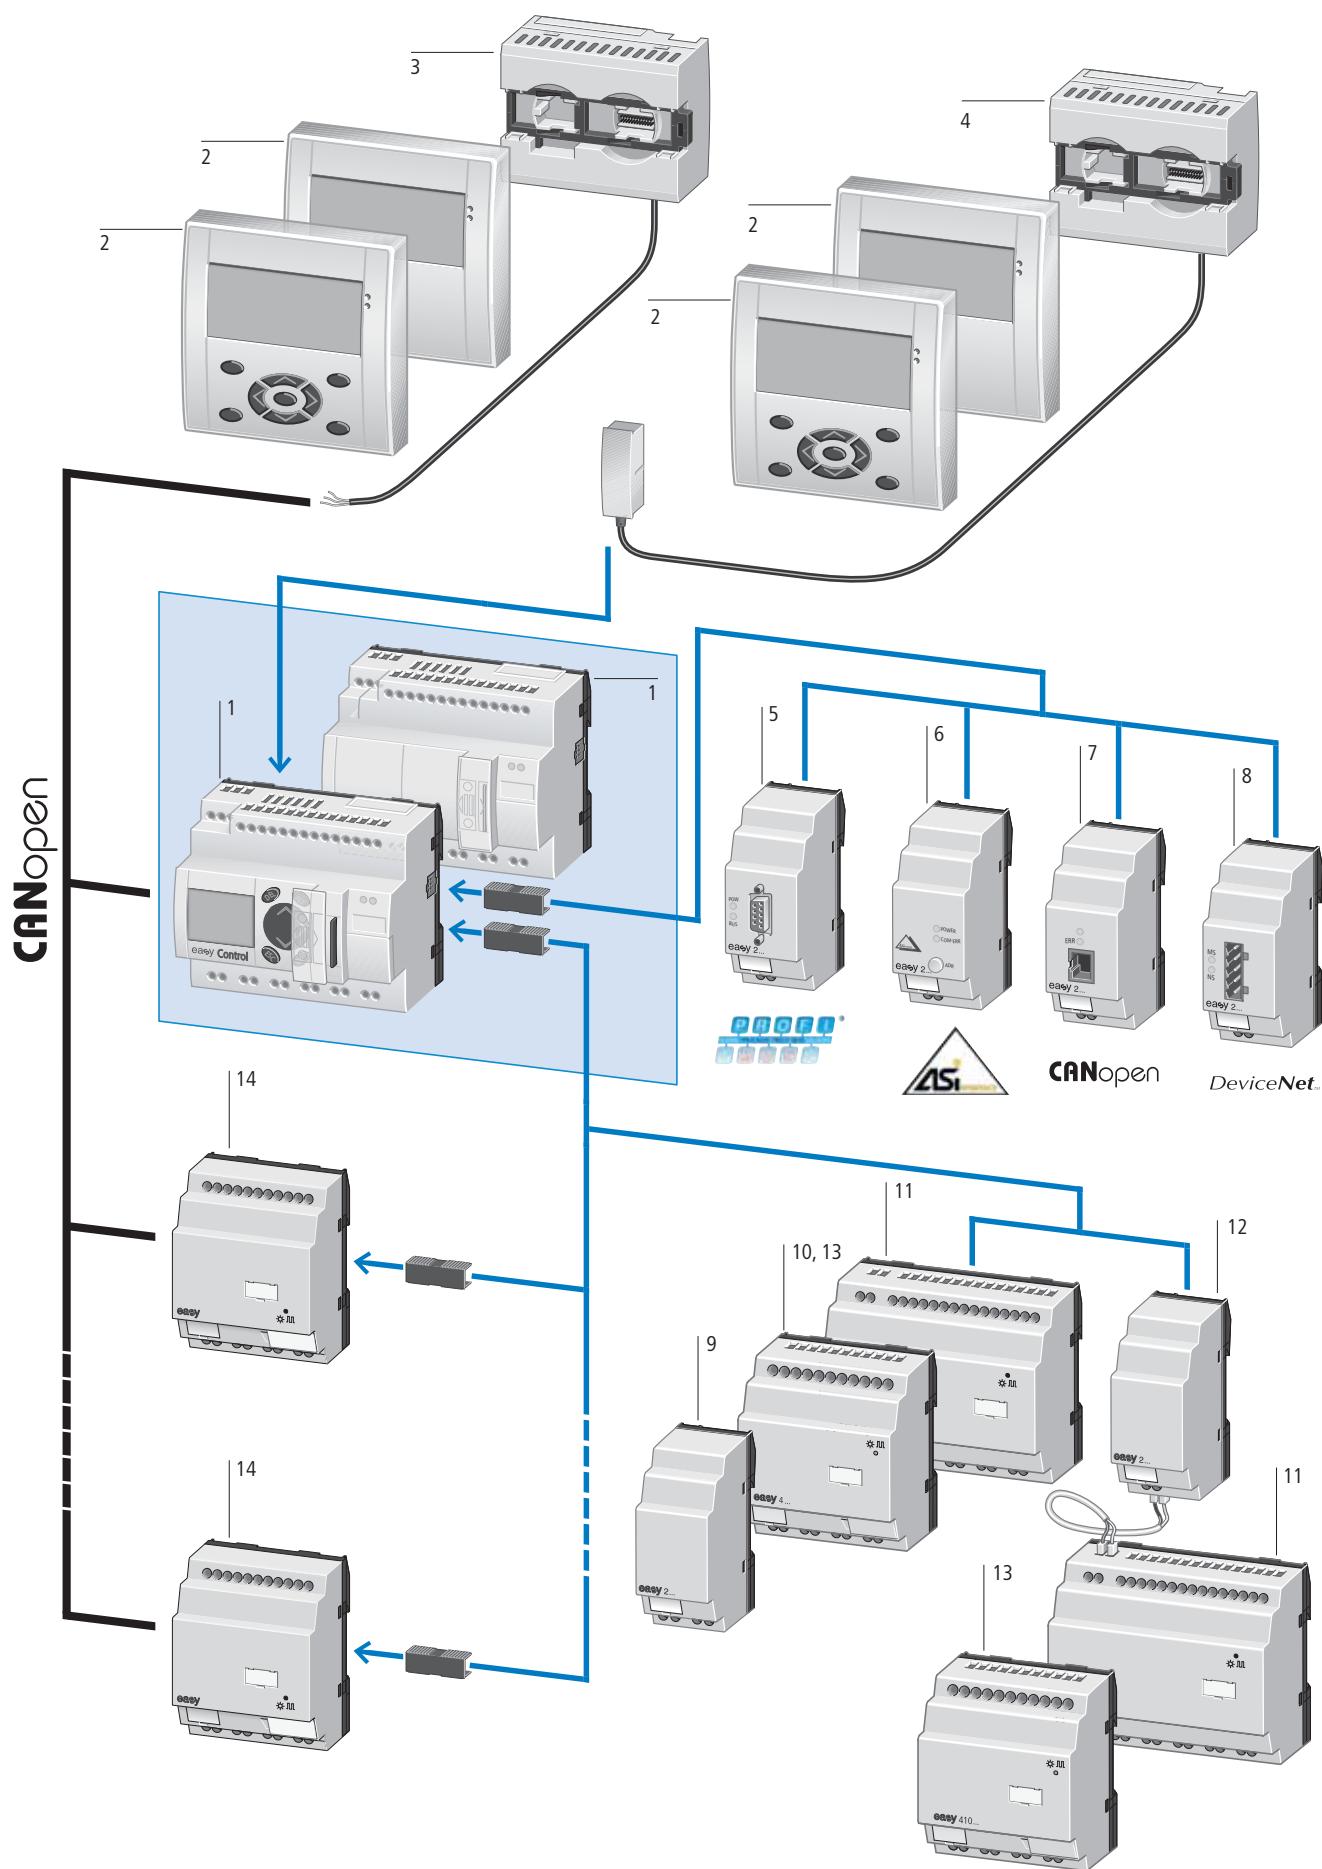

Basic device		I/O expansion modules		Coupling module	
EC4P	1	EASY406-DC-ME	10	EASY200-EASY	12
Expandable: Digital and analog inputs/outputs and bus systems AS-Interface, CANopen, PROFIBUS-DP, DeviceNet; Ethernet optional		24 V DC		For remote connection of a digital I/O expansion module through two-pole connection cable (max. 30 m); e.g. NYM 3 x 1.5 mm ²	
Bus system easyNet on board		1 digital input		→ Page 14/65	
24 V DC		2 analog inputs (2 x 0-10 V or 2 x 0-20 mA or 2 x Pt100 RTD; voltage inputs 0-10 V can optionally be used as digital inputs)			
12 digital inputs		1 analog output (0 - 10 V)			
4 of which usable as analog inputs		2 transistor outputs			
6 relay outputs (max. 10 A, UL) or		Screw and top-hat rail fixing			
8 transistor outputs		Screw terminals			
1 analog output optional		→ Page 14/65			
Display and keypad optional					
Screw and top-hat rail fixing					
Screw terminals					
→ Page 14/64					
Remote text display	2, 3, 4	EASY411-DC-ME	10	EC4E-221...	14
Consists of:		24 V DC		24 V DC	
• Text display MFD-80..(-B)	2	1 digital input		6 digital inputs	
• CANopen interface module MFD-CP4-CO (order connection cable EU4A-RJ45-CAB2 separately)	3	6 analog inputs (2 x 0-10 V and 2 x 0-20 mA and 2 x Pt100 RTD; voltage inputs 0-10 V can optionally be used as digital inputs)		4 relay outputs or	
• Power supply unit/communication card, including connection cable (5 m, can be cut to desired length) for EC4P	4	2 analog outputs (0 - 10 V)		4 transistor outputs	
24 V DC = MFD-CP4-800		2 transistor outputs		→ Page 14/65	
100 - 240 V AC = MFD-AC-CP4-800		Screw and top-hat rail fixing			
Spring-cage terminals		Screw terminals			
→ Page 14/66		→ Page 14/65			
Bus modules		EASY6...	11		
EASY204-DP	5	24 V DC			
PROFIBUS-DP interface, connection as slave		12 digital inputs			
24 V DC		6 relay outputs (max. 10 A, UL) or			
→ Page 14/66		8 transistor outputs			
EASY205-ASI	6	Screw and top-hat rail fixing			
AS-Interface connection as slave, 24 V DC		Screw terminals			
→ Page 14/66		→ Page 14/65			
EASY221-C0	7				
CANopen interface, 24 V DC					
→ Page 14/66					
EASY222-DN	8	EASY410...	13		
DeviceNet interface, 24 V DC		24 V DC			
→ Page 14/66		6 digital inputs			
Output expansion		4 relay outputs (max. 10 A, UL) or			
EASY202-RE	9	4 transistor outputs			
2 relay outputs (max. 10 A, UL)		Screw and top-hat rail fixing			
Screw and top-hat rail fixing		Screw terminals			
→ Page 14/65		→ Page 14/65			



Inputs	Outputs	Other features	Supply voltage connection	Part no. Article no.	Price See price list	Std. pack
Digital	Of which can be used as analog	Relay 10 A (UL)	Transistor	Analog	Display + keypad	
easyControl						
Expandable: Inputs/outputs and bus systems Individual laser inscription possible with EC4-COMBINATION-* → Page 14/69						
						
easy NET/CANopen on board						
12	4	—	8	—	✓	24 V DC
12	4	—	8	—	—	
12	4	6	—	—	✓	
12	4	6	—	—	—	
12	4	—	8	1	✓	
12	4	—	8	1	—	
12	4	6	—	1	✓	
12	4	6	—	1	—	
easyNet/CANopen and Ethernet on board						
12	4	—	8	—	✓	24 V DC
12	4	—	8	—	—	
12	4	6	—	—	✓	
12	4	6	—	—	—	
12	4	—	8	1	✓	
12	4	—	8	1	—	
12	4	6	—	1	✓	
12	4	6	—	1	—	
						

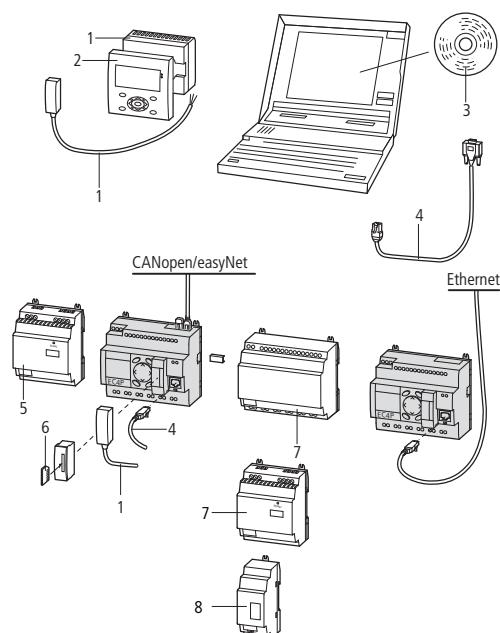Notes**Accessories**

- 1 Power supply unit/communication card
- 2 Display/keypad
- 3 Programming software
- 4 PC programming cable
- 5 Switched-mode power supply unit
- 6 Memory card
- 7 Input/output expansion module
- 8 Output expansion, bus module, coupling module

Page

- 14/66
- 14/66
- 14/130
- 14/67
- 14/131
- 14/67
- 14/65
- 14/65

Information relevant for export to North America

Product Standards	IEC: see Technical Data; UL508; CSA-C22.2 No. 0-M; CSA-C22.2 No. 142-M; CE marking
UL File No.	E135462
UL CCN	NRAQ
CSA File No.	012528
CSA Class No.	2252-01
NA Certification	UL Listed, CSA certified
Degree of Protection	IEC: IP20, UL/CSA Type: -





Inputs	Outputs		Supply voltage	Part no.	Price See price list	Std. pack	Information relevant for export to North America
Digital	Relay 10 A (UL)	Transistor		Article no.			
I/O expansion modules							
Can be used through easyLink							
	12	6	-	100 - 240 V AC 212314	EASY618-AC-RE 212314	1 off	Product Standards IEC/EN see Technical Data; UL 508; CE marking CSA C22.2 No. 142-M1987; CSA C22.2 No. 213-M1987; UL File No. E135462 UL CCN NRAQ, NRAQ7 CSA File No. 012528 CSA Class No. 2252-01 + 2258-02 NA Certification UL Listed, CSA certified Degree of Protection IEC: IP20, UL/CSA Type: -
	12	-	8	24 V DC 212313	EASY620-DC-TE 212313		
	12	6	-	24 V DC 232112	EASY618-DC-RE 232112	Product Standards	IEC/EN see Technical Data; UL 508; CE marking CSA C22.2 No. 142-M1987; CSA C22.2 No. 213-M1987; UL File No. E135462 UL CCN NRAQ, NRAQ7 CSA File No. 012528 CSA Class No. 2252-01 + 2258-02 NA Certification UL Listed, CSA certified Degree of Protection IEC: IP20, UL/CSA Type: -
	-	2	-	24 V DC 232186	EASY202-RE1) 232186		
	6	4	-	24 V DC 114293	EASY410-DC-RE 114293	NA Certification	Request filed for UL and CSA
	6	-	4	24 V DC 114294	EASY410-DC-TE 114294	Degree of Protection	IEC: IP20, UL/CSA Type: -
Can be used through CANopen for: XC100/200, EC4P, MFD4, XV							
	6	4	-	24 V DC 114296	EC4E-221-6D4R1 114296	1 off	NA Certification Request filed for UL and CSA
	6	-	4	24 V DC 114297	EC4E-221-6D4T1 114297	1 off	Degree of Protection IEC: IP20, UL/CSA Type: -
Coupling modules							
Can be used through easyLink							
	For remote connection of a digital I/O expansion up to 30 m.			EASY200-EASY 212315	1 off	Product Standards IEC/EN see Technical Data; UL 508; CE marking; CSA C22.2 No. 142-M1987; CSA C22.2 No. 213-M1987 UL File No. E135462 UL CCN NRAQ, NRAQ7 CSA File No. 012528 CSA Class No. 2252-01 + 2258-02 NA Certification UL Listed, CSA certified Degree of Protection IEC: IP20, UL/CSA Type: -	
Inputs	Outputs		Supply voltage	Part no.	Price See price list	Std. pack	
Digital / Analog	Of which usable as digital	Relay 10 A (UL)	Transistor	Analog			
I/O expansion modules							
Can be used through easyLink							
	1 / 2 ²⁾	2	-	2	1	24 V DC 114295	1 off
	1 / 6 ³⁾	2	-	2	2	24 V DC 116567	1 off

Notes





- ¹⁾ Not for use in combination with basic device EASY719-DA-...
Cannot be used on coupling module EASY200-EASY coupling module
- ²⁾ 2 x 0 - 10 V, 2 x 0 - 20 mA, 2 x Pt100 RTD (2/3-conductor connection); any combination
Voltage inputs (0 -10 V) can optionally be used as digital inputs
- ³⁾ 2 x 0 - 10 V, 2 x 0 - 20 mA, 2 x Pt100 RTD(2/3 conductor connection);
Voltage inputs (0 -10 V) can optionally be used as digital inputs

Information relevant for export to North America




- NA Certification Request filed for UL and CSA
Degree of Protection IEC: IP20,
UL/CSA Type: -

Description		Supply voltage connection	Part no. Article no.	Price See price list	Std. pack	Information relevant for export to North America	
Bus modules							
	AS-Interface	Slave 4 inputs, 4 outputs, 4 parameter bits Assignable addresses 0 to 31	24 V DC	EASY205-ASI 221598	1 off	Product Standards UL File No. UL CCN CSA File No. CSA Class No. NA Certification Degree of Protection	IEC/EN see Technical Data; UL 508; CSA C22.2 No. 142-M1987; CSA C22.2 No. 213-M1987; CE marking E135462 NRAO, NRAQ7 012528 2252-01 + 2258-02 UL Listed, CSA certified IEC: IP20, UL/CSA Type: -
	PROFIBUS-DP	Slave Assignable addresses 1 to 126	24 V DC	EASY204-DP 212316			
	CANopen	Assignable addresses 1 to 127	24 V DC	EASY221-CO 233539			
	DeviceNet	Assignable addresses 0 to 63	24 V DC	EASY222-DN 233540			
Remote text display							
	Display/keypad Monochrome display, 132 x 64 pixels with switchable backlight IP65, removable titanium front frame	With keypad and Moeller logotype NEMA 4x in combination with protective membrane MFD-XM-80 → 14/69		MFD-80-B 265251	1 off	Product Standards UL File No. UL CCN CSA File No. CSA Class No. NA Certification Degree of Protection	IEC/EN see Technical Data; UL 508; CSA C22.2 No. 142-M1987; CSA C22.2 No. 213-M1987; CE marking E135462 NRAQ 012528 2252-01 + 2258-02 UL Listed, CSA certified IEC: IP65, in combination with MFD-XM-80: UL/CSA Type: 4X
	With keypad, without Moeller logotype NEMA 4x in combination with protective membrane MFD-XM-80 → 14/69			MFD-80-B-X 284905	1 off		
Power supply unit/communication cards IP20, can be combined with display/operating unit MFD-80... as remote text display for easyRelay							
	Without connection cable	24 V DC	MFD-CP4 280888	1 off	Product Standards UL File No. UL CCN CSA File No. CSA Class No. NA Certification Degree of Protection	IEC/EN see Technical Data; UL 508; CSA C22.2 No. 142-M1987; CSA C22.2 No. 213-M1987; CE marking E135462 NRAQ 012528 2252-01 + 2258-02 UL Listed, CSA certified IEC: IP20, UL/CSA Type: -	
	Without connection cable	100 - 240 V AC	MFD-AC-CP4 286822	1 off			

HPL14067EN


Supply voltage connection	Description	Part no. Article no.	Price See price list	Std. pack	Information relevant for export to North America
CANopen communication card					
Communication card with CANopen interface For use with display/operating unit MFD-80-B(-X) and connection cable EU4A-RJ45-CAB2 (→ Page 14/67) Automatic baud rate setting up to 1 MBaud; Up to 64 display pages can be saved.					
	24 V DC –	MFD-CP4-CO 115736		1 off  	NA Certification Request filed for UL and CSA
Programming cable					
	– USB, 2 m	EASY800-USB-CAB 106408		1 off	
	– D-sub 9-pin, serial, 2 m	EU4A-RJ45-CAB1 106726		1 off  	NA Certification Request filed for UL and CSA
	For EU5C, XC and EC4P via USB interface	EU4A-RJ45-USB-CAB1 115735		1 off	
	– 2 m Ethernet cross	XT-CAT5-X-2 256487		1 off	
	– 5 m Ethernet cross	XT-CAT5-X-5 256488		1 off	
Modem cable					
	Configurable modem, printer and programming cable, possible transfer rate 56 kBaud, D-sub 9-pin (plug + socket for assembly by user)	EASY800-MO-CAB 286079		1 off	
Connecting cables					
	– For connecting EC4P (RJ45) to MFD-CP4-CO or EC4E (terminal block)	EU4A-RJ45-CAB2 115387		1 off  	NA Certification Request filed for UL and CSA
Memory cards					
	– Adapter with at least 64 MByte memory card	EU4A-MEM-CARD1 106409		1 off  	NA Certification Request filed for UL and CSA
Input/output simulator					
	24 V DC With plug-in power supply unit 100 - 240 V AC/ 24 V DC	EASY800-DC-SIM 256278			



Description	For use with	Part no. Article no.	Price See price list	Std. pack	Information relevant for export to North America
Network connection cables					
	Length: 0.3 m easyNet	EASY-NT-30 256283		1 off  	Product Standards IEC/EN see Technical Data; UL 508; CSA C22.2 No. 142-M1987; CSA C22.2 No. 213-M1987; CE marking E135462 NRAQ 012528 2258-02 UL Listed, CSA certified IEC: IP20, UL/CSA Type: -
	Length: 0.8 m easyNet	EASY-NT-80 256284			UL File No. UL CCN CSA File No. CSA Class No. NA Certification Degree of Protection
	Length: 1.5 m easyNet	EASY-NT-150 256285			
Bus termination resistor					
	8-pin, RJ45, 124 Ω Connection to PIN 1 and PIN 2	easyNet	EASY-NT-R 256281	2 off  	
Data cable					
	4 x 0.14 mm², twisted pair, AWG 26 Length: 100 m	easyNet	EASY-NT-CAB 256286	1 off  	UL File No. UL CCN NA Certification Degree of Protection
					E135462 NRAQ UL Listed IEC: IP 20, UL/CSA Type: -
Bus connector plug					
	8-pin, RJ45	easyNet	EASY-NT-RJ45 256280	10 off  	Product Standards IEC/EN see Technical Data; UL 508; CSA C22.2 No. 142-M1987; CSA C22.2 No. 213-M1987; CE marking E135462 UL File No. UL CCN CSA File No. CSA Class No. NA Certification Degree of Protection
					NRAQ 012528 2258-02 UL Listed, CSA certified IEC: IP20, UL/CSA Type: -
Crimping tool					
	For RJ45 plug	easyNT-CAB easyNT-RJ45	EASY-RJ45-TOOL 256282	1 off	
PROFIBUS-DP data cable					
	Twisted pair, without plug, 2-core, 2 x 0.64 mm² (only suitable for fixed wiring) 100 m		ZB4-900-KB1 206983	100 m	
PROFIBUS-DP bus connector plug					
	9-pin male Cable entry, angled 90°		ZB4-209-DS2 206982	1 off	
	Metalized insulated housing Maximum transfer rate 12 MBit/s Integrated switch (accessible from the outside) for the bus terminating resistors Terminal block for two cable entries, with straight or 90° angled cable entry, as required		ZB4-209-DS3 217820	1 off	
Connection plug					
	Bus connector plug between base unit and expansion unit/bus module		EASY-LINK-DS 221607	1 off  	UL/CSA certification not required
Fixing bracket For screw fixing to mounting plate					
	3 fixing brackets for easy400, 500, 600, 700, 800, EC4P, ES4P 2 fixing brackets for easy200 3 fixing brackets for MFD-CP8..., MFD-AC-CP8...		ZB4-101-GF1 061360	9 off  	UL/CSA certification not required

Description	For use with	Part no. Article no.	Price See price list	Std. pack	Information relevant for export to North America	
Telescopic clip	For use with 35 mm top-hat rail to IEC/EN 60715 for mounting depth compensation when rear mounting in enclosures CI-K... and panels. Stepless adjustment via scale from 75 – 115 mm. Screw and snap mounting	M22-TA 226161		1 off	Product Standards IEC/EN 60947-5; UL 508; CSA-C22.2 No. 14-05; CSA-C22.2 No. 94-91; CE marking UL File No. E29184 UL CCN NKCR CSA File No. 012528 CSA Class No. 3211-03 NA Certification UL Listed, CSA certified	
Top-hat rail adapter for hinged inspection window	12 mm x 66 mm x 82 mm Installation on hinged inspection window, for front fitting of devices. Complete set, consisting of 2 brackets and 4 screws	SKF-HA 233782		1 off	UL/CSA certification not required	
Hinged inspection window	94 mm x 77 mm x 25 mm (4 space units) For use with easy500 130 mm x 77 mm x 25 mm (6 space units) For use with EASY700, EASY800, EC4P, ES4P	SKF-FF4 233780 SKF-FF6 233781		1 off	UL/CSA certification not required	
Protective cover	Transparent Protection against accidental actuation Sealable Use without front frame	MFD-XS-80 265259		1 off	Product Standards IEC/EN see Technical Data; UL 508; CSA C22.2 No. 142-M1987; CSA C22.2 No. 213-M1987; CE marking UL File No. E135462 UL CCN NRAQ CSA File No. 012528 CSA Class No. 2252-01 + 2258-02 NA Certification UL Listed, CSA certified	
Protective diaphragm	Transparent type for harsh environmental conditions and application in the food industry For increasing the degree of protection to NEMA 4X for MFD-80-B	MFD-XM-80 265258		1 off	Product Standards IEC/EN see Technical Data; UL 508; CSA C22.2 No. 142-M1987; CSA C22.2 No. 213-M1987; CE marking UL File No. E135462 UL CCN NRAQ CSA File No. 012528 CSA Class No. 2252-01 + 2258-02 NA Certification Degree of Protection UL Listed, CSA certified Degree of Protection IEC: IP65, UL/CSA Type:°4X	
Supply voltage connection	Description	For use with	Part no. Article no.	Price See price list	Std. pack	Information relevant for export to North America
Custom labeling, user program						
• Custom labeling of multi-function display with labeling software Labeleditor or	MFD-80-X MFD-80-B-X	MFD-COMBINATION-* 265260		1 off	UL/CSA certification not required	
• Supply of multi-function display programmed with user program						
• Custom labeling of easy Control with labeling software Labeleditor or supply of easyControls programmed with user program	EC4P	EC4-COMBINATION-*1 107600		1 off		
Notes	Example for using the Labeleditor labeling software Individually label your device in 4 stages: – Download the labeling software: www.moeller.net/support , keyword: "Labeleditor" – Create a label template (menu-guided in the software) – Mail the label template to the factory. The program automatically selects the correct e-mail address for the selected product and assigns a file name, such as "EASY_12345.zip". This file name is part of the article to be ordered (see Ordering examples). – Send your order to your Eaton sales office or your electrical wholesaler.					
Ordering example: MFD-Titan	Ordering example: EC4P MFD-80-B multi-function display with "company name": 1 x MFD-COMBINATION-* 1 x MFD-80-B 1 x the file name "MFD_xxxxxx.zip" issued by the Labeleditor					
	EC4P-221-MTXD1 with "company name": 1 x EC4-COMBINATION-* 1 x EC4P-221-MTXD1 1 x the file name "EC4P_xxxxxx.zip" issued by the Labeleditor					

Technical data

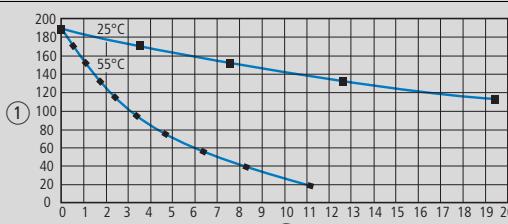EC4P...																												
General																												
Standards		EN 55011, EN 55022, IEC/EN 61000-4, IEC 60068-2-6, IEC 60068-2-27																										
Dimensions (W x H x D)	mm	107.5 x 90 x 72 without/79 with adapter for memory card																										
Weight	kg	0.3																										
Mounting		Top-hat rail IEC/EN 60715, 35 mm or screw fixing with 3 fixing brackets ZB4-101-GF1 (accessories)																										
Terminal capacity																												
Solid	mm ²	0.2 - 4 (AWG 22 - 12)																										
Flexible with ferrule	mm ²	0.2 - 2.5 (AWG 22 - 12)																										
Flat-blade screwdriver	mm	3.5 x 0.8																										
Max. tightening torque	Nm	0.6																										
Ambient climatic conditions																												
Operating ambient temperature	°C	-25...55, low temperatures to IEC 60068-2-1, high temperatures to IEC 60068-2-2																										
Condensation		Prevent condensation by means of suitable measures																										
LCD display (clearly legible)	°C	0 - 55																										
Storage	°C	-40 - 70																										
Relative humidity, non-condensing (IEC/EN 60068-2-30)	%	5 - 95																										
Air pressure (in operation)	hPa	795 - 1080																										
Ambient mechanical conditions																												
Pollution degree		2																										
Degree of protection (IEC/EN 60529, EN50178, VBG 4)		IP20																										
Vibrations (IEC/EN 60068-2-6)																												
Constant amplitude 0.15 mm	Hz	10 - 57																										
Constant acceleration, 2 g	Hz	57 - 150																										
Mechanical shock resistance (IEC/EN 60068-2-27) semi-sinusoidal 15 g/11 ms	Shocks	18																										
Drop to (IEC/EN 60068-2-31)	Drop height	50																										
Free fall, packaged (IEC/EN 60068-2-32)	m	1																										
Mounting position		Vertical or horizontal																										
Electromagnetic compatibility (EMC)																												
Electrostatic discharge (IEC/EN 61000-4-2, Level 3, ESD)																												
Air discharge	kV	8																										
Contact discharge	kV	6																										
Electromagnetic fields (RFI), to IEC EN 61000-4-2	V/m	10																										
Radio interference suppression		EN 55011 Class B, EN 55022 Class B																										
Burst pulses (IEC/EN 61000-4-4, Level 3)																												
Supply cables	kV	2																										
Signal cables	kV	2																										
Surge pulses (IEC/EN 61000-4-5, Level 2)	kV	0.5 (supply cables, symmetrical, EASY...DC)																										
Line-conducted interference (IEC/EN 61000-4-6)	V	10																										
Insulation resistance																												
Clearance in air and creepage distances		EN 50178, UL 508, CSA C22.2, No. 142																										
Insulation resistance		EN 50178																										
Real-time clock accuracy/backup time																												
Back-up time		 <table border="1"> <caption>Data points estimated from graph</caption> <thead> <tr> <th>Service life (years) (②)</th> <th>Backup time (hours) (①)</th> </tr> </thead> <tbody> <tr><td>0</td><td>180</td></tr> <tr><td>1</td><td>140</td></tr> <tr><td>2</td><td>100</td></tr> <tr><td>3</td><td>80</td></tr> <tr><td>4</td><td>70</td></tr> <tr><td>5</td><td>60</td></tr> <tr><td>6</td><td>50</td></tr> <tr><td>7</td><td>40</td></tr> <tr><td>8</td><td>30</td></tr> <tr><td>9</td><td>20</td></tr> <tr><td>10</td><td>15</td></tr> <tr><td>11</td><td>10</td></tr> </tbody> </table> <p>① Backup time (hours) ② Service life (years)</p>	Service life (years) (②)	Backup time (hours) (①)	0	180	1	140	2	100	3	80	4	70	5	60	6	50	7	40	8	30	9	20	10	15	11	10
Service life (years) (②)	Backup time (hours) (①)																											
0	180																											
1	140																											
2	100																											
3	80																											
4	70																											
5	60																											
6	50																											
7	40																											
8	30																											
9	20																											
10	15																											
11	10																											
Accuracy of the real-time clock	s/day	Normally ± 5 (± 0.5 h/year)																										
Retentive memory																												
Write cycles of the retentive memory (minimum)		10000000 (10 ¹⁰) (read/write cycles)																										

		EC4P-221...	EC4P-222...
Power supply			
Rated operational voltage	U _e	V	24 DC (-15/+20%)
Permissible range		V DC	20.4 - 28.8
Ripple		%	≤ 5
Input current			
At rated voltage		mA	Normally 140
At rated operating voltage with load		A	–
Voltage dips (IEC/EN 61131-2)		ms	10
Heat dissipation		W	Normally 3.4
CPU			
Microprocessor			Infineon XC161
Memory			
Program code/data		kByte	256/14 segments of 16 KB each
Marker/input/output/retain data		kByte	16/4/4/8
Cycle time for 1 k of instructions (bits, bytes)		ms	< 0.3
Interfaces			
COM1 (RS232) without control cables			
Data transfer rate for programming		kBit/s	4.8, 9.6, 19.2, 38.4, 57.6, 115.2 (character format: 8 data bits, no parity, 1 stop bit)
Connections			RJ45 bus
Potential isolation			None
In the transparent mode			
Baud rate		kBit/s	0.3, 0.6, 1.2, 2.4, 4.8, 9.6, 19.2, 38.4, 57.6
Character formats			8E1, 8O1, 8N1, 8N2, 7E2, 7O2, 7N2, 7E1
Number of transmission bytes in a block			190 Byte
Number of received bytes in a block			190 Byte
Ethernet (for programming)			
Data transfer rate/distance		MBit/s	–
Connection type			10 MBit/s, 100 m
Potential isolation			RJ45
CANopen/easyNet			No
Data transfer rate/distance			
		500 kBit/s, 25 m	500 kBit/s, 25 m
		250 kBit/s, 60m	250 kBit/s, 60m
		125 kBit/s, 125 m	125 kBit/s, 125 m
		50 kBit/s, 300 m	50 kBit/s, 300 m
		20 kBit/s, 700 m	20 kBit/s, 700 m
		10 kBit/s, 1000 m	10 kBit/s, 1000 m
Potential isolation			
From power supply		Yes	Yes
From the inputs		Yes	Yes
From the outputs		Yes	Yes
Bus termination (first and last station)		EASY-NT-R plug (incl. bus terminating resistor 120 Ω)	
Connections		2 x RJ45, 8-pin	2 x RJ45, 8-pin
Control operating mode easyNet			
Number of users		8	8
CANopen operating mode			
Stations	Number	Max. 126	Max. 126
PDO type		Asynchronous, cyclic, acyclic	
Device profile		To DS 301 V4	To DS 301 V4
Analog outputs			
Number		–	–
Potential isolation			
From power supply		No	No
From the digital inputs		No	No
From the digital outputs		–	–
To network easyNet, easyLink		–	–
Output type		–	–
Signal range	V DC	0 - 10	0 - 10
Conversion time, analog/digital	ms	bit	bit



	EC4P...	
Digital inputs 24 V DC		
Number		12
Inputs can be used as analog inputs		4 (I7, I8, I11, I12)
Status indication		LCD display (if fitted)
Potential isolation		
From power supply		No
Between digital inputs		No
From the outputs		Yes
From network easyNet, easyLink		Yes
Rated operating voltage	U _e	V DC
At state "0"	U _e	V DC
At state "1"	U _e	V DC
Input current at state "1"		
I1 to I6		mA
I7, I8		mA
I9, I10		mA
I11, I12		mA
Delay time from 0 to 1		ms
Delay time from 1 to 0		ms
Cable length (unshielded)		m
Incremental encoder		
Number		1 (I1, I2, I3, I4)
Value range		32 bit
Counter frequency		kHz
Pulse shape		≤ 40
Counter inputs		Square
Reference input		I1, I2
Input for reference switch		I3
Signal offset		I4
		90°
Rapid counter inputs		
Number		2 (I1, I2) at 16 bit or 1 (I1) at 32-bit
Value range		16/32-bit
Cable length, shielded		m
Counter frequency		kHz
Pulse shape		< 20
		< 50
		Square
Analog inputs		
Number		4 (I7, I8, I11, I12)
Potential isolation		
From power supply		No
From the digital inputs		No
From the outputs		Yes
From network easyNet, easyLink		Yes
Input type		DC voltage
Signal range		0 - 10
Resolution, analog		V
Resolution, digital		V
Resolution, digital		bit
Input impedance		10 (value 0 - 1023)
Accuracy of actual value		kΩ
Two devices		%
Within a single device		± 3
Conversion time, analog/digital		%
Input current		± 2, (I7, I8, I11, I12) ± 0.12 V
Cable length shielded		ms
		each CPU cycle
		< 1
		m
		< 30



			EC4P-....-MT...
Transistor outputs			
Number			8
Rated operating voltage			U _e V DC
Permissible range			U _e V DC
Ripple			%
Supply current			
At state "0"			Normally/ max. mA
At state "1"			Normally/ max. mA
Protection against polarity reversal			Yes (Caution: A short circuit will result if 0 V or GND is applied to the outputs if the supply voltage is connected to the wrong poles.)
Potential isolation			
From power supply			Yes
To PC interface, memory card, network NET, easyLink			Yes
From the inputs			Yes
Rated operational current at state "1" DC			I _e A
Lamp load without R _v			W
Residual current at state "0" for channel			mA
Max. output voltage			
At state "0" with external load < 10 MΩ			V
At state "1" at I _e = 0.5 A			V
Short-circuit protection			
Short-circuit tripping current for R _a ≤ 10 mΩ			A
Total short-circuit current			A
Peak short-circuit current			A
Thermal cutout			
Max. operating frequency at constant resistive load R _L < 100 kΩ (dependent on program and load)			Ops/h
Parallel connection of outputs			
With resistive load, inductive load with external suppressor circuit, combination within a group			Group 1: Q1 to Q4 Group 2: Q5 to Q8
Number of outputs			max.
Max. total current			A
Output status indication			
Inductive load to EN 60947-5-1			LCD display (if fitted)
Without outer suppressor circuit			
T _{0.95} = 1 ms, R = 48 Ω, L = 16 mH			
Utilization factor			g
Duty factor			% DF
Max. operating frequency f = 0.5 Hz (max. DF = 50 %)			Operations
DC-13, T _{0.95} = 72 ms, R = 48 Ω, L = 1.15 H			
Utilization factor			g
Duty factor			% DF
Max. operating frequency f = 0.5 Hz (max. DF = 50 %)			Operations
T _{0.95} = 15 ms, R = 48 Ω, L = 0.24 H			
Utilization factor			g
Duty factor			% DF
Max. operating frequency f = 0.5 Hz (max. DF = 50 %)			Operations
With outer suppressor circuit			
Utilization factor			g
Duty factor			% DF
Max. operating frequency, max. duty factor			Operations
			Depending on the suppressor circuit



	EC4P-...-MR...	
Relay outputs		
Number	6	
Outputs in groups of	1	
Parallel switching of outputs to increase performance	Not permissible	
Protection of an output relay	Miniature circuit-breaker B16 or fuse 8 A (slow)	
Potential isolation		
From power supply	Yes	
From the inputs	Yes	
From PC interface, memory card, network NET, easyLink	Yes	
Safe isolation	V AC	300
Basic insulation	V AC	600
Lifespan, mechanical	Operations	x 10 ⁶
		10
Contacts		
Conventional thermal current (10 A UL)	A	8
Recommended for 12 V AC/DC load	mA	> 500
Short-circuit proof p.f. = 1, characteristic B16 at 600 A	A	16
Short-circuit proof p.f. = 0.5 - 0.7; characteristic B16 at 900 A	A	16
Rated impulse withstand voltage U _{imp} , contact coil	kV	6
Rated operating voltage	U _e	V AC
		250
Rated insulation voltage	U _i	V AC
Safe isolation to EN 50178 between coil and contact		250
Safe isolation to EN 50178 between two contacts		300
Making capacity		
AC-15, 230 V AC, 3 A	Operations	300000
DC-13, 24 V DC, 0.1 Hz	Operations	200000
Breaking capacity		
AC-15, 250 V AC, 3 A (600 ops./h)	Operations	300000
DC-13, L/R ≤ 150 ms, 24 V DC, 1 A (500 ops./h)	Operations	200000
Filament bulb load		
1000 W at 230/240 V AC	Operations	25000
500 W at 115/120 V AC	Operations	25000
Fluorescent lamp load		
Fluorescent lamp load 10 x 58 W at 230/240 V AC		
With series-connected electrical device	Operations	25000
Uncompensated	Operations	25000
Fluorescent lamp load 1 x 58 W at 230/240 V AC, conventionally compensated	Operations	25000
Switching frequency		
Mechanical operations	x 10 ⁶	10
Switching frequency	Hz	10
Resistive load/lamp load	Hz	2
Inductive load	Hz	0.5
UL/CSA		
Continuous current at 240 V AC	A	10
Continuous current at 24 V DC	A	8
AC		
Control circuit rating codes (utilization category)		B 300 Light Pilot Duty
Max. rated operational voltage	V AC	300
Max. thermal continuous current p.f. = 1 at B 300	A	5
Max. make/break capacity p.f. ≠ 1 at B 300	VA	3600/360
DC		
Control circuit rating codes (utilization category)		R 300 Light Pilot Duty
Max. rated operational voltage	V DC	300
Max. thermal continuous current p.f. at R 300	A	1
Max. make/break capacity at R 300	VA	28/28



			EC4E-221...
General			
Standards			EN 55011, EN 55022, IEC/EN 61000-4, IEC 60068-2-6, IEC 60068-2-27
Dimensions (W x H x D)			71.5 x 90 x 58 (4 space units)
Weight			0.2
Mounting			Top-hat rail IEC/EN 60715, 35 mm or screw fixing using fixing brackets ZB4-101-GF1 (accessories).
Terminal capacity			
Solid			mm ²
Flexible with ferrule			mm ²
Flat-blade screwdriver			mm
Max. tightening torque			Nm
Ambient climatic conditions			
Operating ambient temperature			°C
Condensation			-25...55, low temperatures to IEC 60068-2-1, high temperatures to IEC 60068-2-2
Storage			°C
Relative humidity, non-condensing (IEC/EN 60068-2-30)			%
Air pressure (in operation)			hPa
Ambient mechanical conditions			
Protection type (IEC/EN 60529, EN50178, VBG 4)			IP20
Vibrations (IEC/EN 60068-2-6)			
Constant amplitude 3.5 mm			Hz
Constant acceleration, 1 g			Hz
Mechanical shock resistance (IEC/EN 60068-2-27) semi-sinusoidal 15 g/11 ms			Shocks
Drop to IEC/EN 60068-2-31			Drop height
Free fall, packaged (IEC/EN 60068-2-32)			m
Mounted position			
Electromagnetic compatibility (EMC)			
Overvoltage category/pollution degree			II/2
Electrostatic discharge (IEC/EN 61000-4-2, Level 3, ESD)			
Air discharge			kV
Contact discharge			kV
Electromagnetic fields (RFI), to IEC EN 61000-4-2			V/m
Radio interference suppression			
Burst pulses (IEC/EN 61000-4-4, Level 3)			EN 55011 Class B, EN 55022 Class B
Supply cables			kV
Signal cables			kV
Surge pulses (IEC/EN 61000-4-5, Level 2)			0.5 (supply cables, symmetrical, EASY...DC)
Line-conducted interference (IEC/EN 61000-4-6)			V
Insulation resistance			
Clearance in air and creepage distances			EN 50178, UL 508, CSA C22.2, No. 142
Insulation resistance			EN 50178

Notes

Technical data for the expansion units EASY... → Chapter 12



			EC4E-221-...
Power supply			
Rated operational voltage	U _e	V	24 DC (-15/+20%)
Permissible range			
Permissible range min.		V DC	20.4
Permissible range max.		V DC	28.8
Ripple		%	≤ 5
Input current			
At rated operating voltage without load		mA	Normally 150
At rated operating voltage with load		A	–
Voltage dips (IEC/EN 61131-2)		ms	10
Heat dissipation		W	Normally 3.5
Interfaces			
CANopen			
Data transfer rate/distance			500 kBit/s, 25 m 250 kBit/s, 40 m 125 kBit/s, 125 m 50 kBit/s, 300 m 20 kBit/s, 700 m 10 kBit/s, 1000 m
Potential isolation			No
Bus termination (first and last station)			Through integrated Dip switch
Connections			2 x terminals (see terminal capacity)
CANopen operating mode			
Stations		Number	Max. 62
PDO type			Asynchronous, cyclic, acyclic
Device profile			To DS 301 V4
Digital inputs 24 V DC			
Number			6
Potential isolation			
From power supply			No
Between digital inputs			No
From the outputs			Yes
Rated operating voltage	U _e	V DC	24
At state "0"	U _e	V DC	< 5 (R1 - R6)
At state "1"	U _e	V DC	> 15 (R1 - R6)
Input current at state "1"			
R1 - R6 (R12)		mA	3.3 (at 24 V DC)
R1		mA	–
R2, R3		mA	–
Delay time from 0 to 1			
Debounce ON		ms	20
Debounce OFF		ms	Normally 0.25 (R1 - R12)
Delay time from 1 to 0		ms	20
Cable length (unshielded)		m	100

Notes

Technical data for the expansion units EASY... → Chapter 12

			EC4E-221-6D4R1
Relay outputs			
Number			4
Outputs in groups of			1
Parallel switching of outputs to increase performance			Not permissible
Protection of an output relay			Miniature circuit-breakers B16 or fuse 8 A (T)
Potential isolation			
From power supply			Yes
From the inputs			Yes
From PC interface, memory card, network NET, easyLink			Yes
Safe isolation According to EN 50178			V AC 300
Basic insulation			V AC 600
Lifespan, mechanical	Operations	$\times 10^6$	10
Contacts			
Conventional thermal current (10 A UL)			A 8
Recommended for 12 V AC/DC load			mA > 500
Short-circuit proof p.f. = 1, characteristic B16 at 600 A			A 16
Short-circuit proof p.f. = 0.5 - 0.7; characteristic B16 at 900 A			A 16
Rated impulse withstand voltage U_{imp} contact coil			kV 6
Rated operating voltage	U_e	V AC	250
Rated insulation voltage	U_i	V AC	250
Safe isolation to EN 50178 between coil and contact		V AC	300
Safe isolation to EN 50178 between two contacts		V AC	300
Making capacity			
AC-15, 230 V AC, 3 A	Operations		300000
DC-13, 24 V DC, 0.1 Hz	Operations		200000
Breaking capacity			
AC-15, 250 V AC, 3 A (600 ops./h)	Operations		300000
DC-13, L/R \leq 150 ms, 24 V DC, 1 A (500 ops./h)	Operations		200000
Filament bulb load			
1000 W at 230/240 V AC	Operations		25000
500 W at 115/120 V AC	Operations		25000
Fluorescent lamp load			
Fluorescent lamp load 10 x 58 W at 230/240 V AC	Operations		
With series-connected electrical device	Operations		25000
Uncompensated	Operations		25000
Fluorescent lamp load 1 x 58 W at 230/240 V AC, conventionally compensated	Operations		25000
Switching frequency			
Mechanical operations		$\times 10^6$	10
Switching frequency		Hz	10
Resistive load/lamp load		Hz	2
Inductive load		Hz	0.5
UL/CSA			
Continuous current at 240 V AC	A		10
Continuous current at 24 V DC	A		8
AC			
Control circuit rating codes (utilization category)			B 300 Light Pilot Duty
Max. rated operational voltage		V AC	300
Max. thermal continuous current p.f. = 1 at B 300	A		5
Max. make/break capacity p.f. \neq 1 at B 300	VA		3600/360
DC			
Control circuit rating codes (utilization category)			R 300 Light Pilot Duty
Max. rated operational voltage		V DC	300
Max. thermal continuous current p.f. at R 300	A		1
Max. make/break capacity at R 300	VA		28/28



			EC4E-221-6D4T1
Transistor outputs			
Number			4
Rated operating voltage	U_e	V DC	24
Permissible range	U_e	V DC	20.4 - 28.8
Ripple			≤ 5
Supply current			
At state "0"	Normally/ max.	mA	9/16
At state "1"	Normally/ max.	mA	12/22
Protection against polarity reversal			Yes (Caution: A short circuit will result if 0 V or GND is applied to the outputs if that the supply voltage is connected to the wrong poles.)
Potential isolation			
From power supply			Yes
From PC interface, memory card, network NET, easyLink			Yes
Rated operational current at state "1" DC for channel	I_e	A	Max. 0.5
Lamp load without R_v for channel			5
Residual current at state "0" for channel			< 0.1
Max. output voltage			
At state "0" with external load < 10 MΩ		V	2.5
At state "1" at $I_e = 0.5$ A		V	$U = U_e - 1$ V
Short-circuit protection			Yes, thermal (analysis via diagnostics input R16)
Short-circuit tripping current for $R_a \leq 10$ mΩ		A	0.7 $\leq I_e \leq 2$ for output
Total short-circuit current		A	8
Peak short-circuit current		A	16
Thermal cutout			Yes
Max. operating frequency at constant resistive load $R_L < 100$ kΩ (dependent on program and load)		Ops/h	40000
Parallel connection of outputs			
With resistive load, inductive load with external suppressor circuit, combination within a group			Group 1: Q1 to Q4
Number of outputs	Max.		4
Max. total current		A	2 (Caution! Outputs must be activated simultaneously and for the same duration)




MFD-CP4-CO		
General		
Standards		EN 61000-6-1/-2/-3/-4, IEC 60068-2-6, IEC 60068-2-27
Dimensions (W x H x D)	mm	75 x 58 x 36.2
Weight	kg	0.16
Mounting	Plug-fitted to the display fixing shaft	
Terminal capacity		
Power supply		
Solid	mm ²	0.5 - 2.5 (AWG 20 - 14)
Flexible with ferrule	mm ²	0.5 - 1.5 (AWG 20 - 16)
Flat-blade screwdriver	mm	3.5 x 0.6
Data cable		
Solid	mm ²	0.2 - 0.5 (AWG 24 - 20)
Ambient climatic conditions		
Operating ambient temperature	°C	-25 - 55, low temperatures to IEC 60068-2-1, high temperatures to IEC 60068-2-2
Condensation		Prevent condensation by means of suitable measures
Storage	°C	-40 - 70
Relative humidity, non-condensing (IEC/EN 60068-2-30)	%	5 - 95
Air pressure (in operation)	hPa	795 - 1080
Ambient mechanical conditions		
Pollution degree		2
Protection type (IEC/EN 60529, EN50178, VBG 4)		IP20
Vibrations (IEC/EN 60068-2-6)		
Constant amplitude 0.15 mm	Hz	10 - 57
Constant acceleration, 2 g	Hz	57 - 150
Mechanical shock resistance (IEC/EN 60068-2-27) semi-sinusoidal 15 g/11 ms	Shocks	18
Drop to IEC/EN 60068-2-31	Drop height	mm 50
Free fall, packaged (IEC/EN 60068-2-32)		m 1
Mounted position		Vertical or horizontal
Electromagnetic compatibility (EMC)		
Overtoltage category/pollution degree		-
Electrostatic discharge (IEC/EN 61000-4-2, Level 3, ESD)		
Air discharge	kV	8
Contact discharge	kV	6
Electromagnetic fields (RFI), to IEC EN 61000-4-2	V/m	10
Radio interference suppression		EN 55011 Class B, EN 55022 Class B
Burst pulses (IEC/EN 61000-4-4, Level 3)		
Supply cables	kV	2
Signal cables	kV	2
Surge pulses (IEC/EN 61000-4-5, Level 2)	kV	0.5
Line-conducted interference (IEC/EN 61000-4-6)	V	10
Insulation resistance		
Clearance in air and creepage distances		EN 50178, UL 508, CSA C22.2, No. 142
Insulation resistance		EN 50178
Power supply		
Rated operational voltage	U _e	V 24 DC (-15/+20 %)
Permissible range		V DC 20.4 - 28.8
Ripple	%	≤ 5
Input current		
At 24 V DC	mA	Normally 185
Voltage dips (IEC/EN 61131-2)	ms	10
Heat dissipation at 24 V DC	W	1.5
Interfaces		
CANopen		
Device profile		To DS301V4
PDO type		Asynchronous (event controlled)
Addresses		1 to 63 can be set through display
Baud rate/length	kBd	10 kByte up to 1 MByte, Automatic detection Manual setting via display possible.
Connections		6 pole spring-cage terminal
Terminal resistor	Ω	External 120




Dimensions


EC4P...

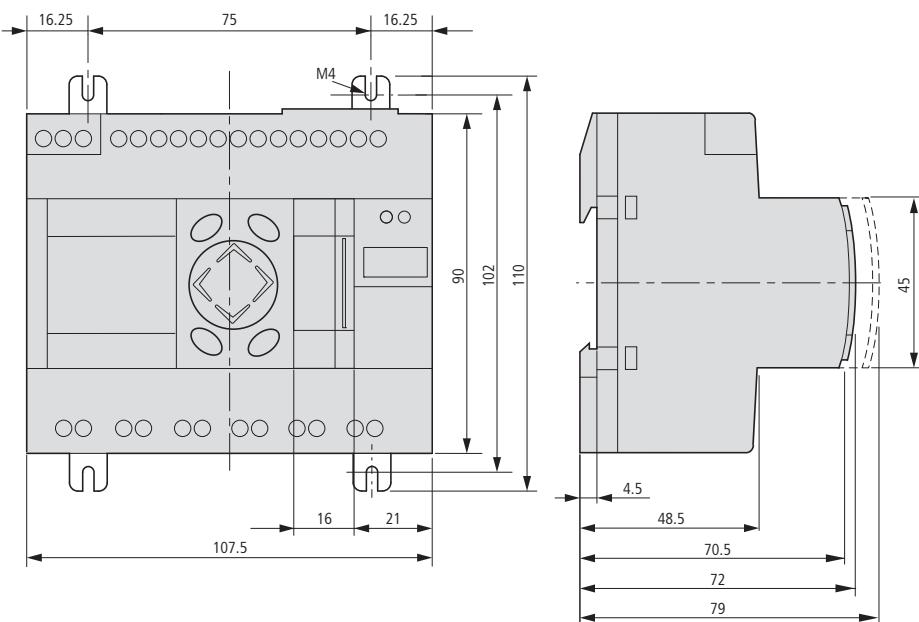

MFD-CP4-C0

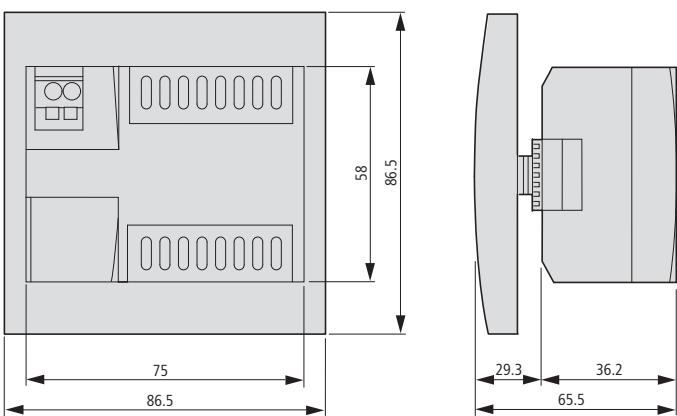


EC4E...

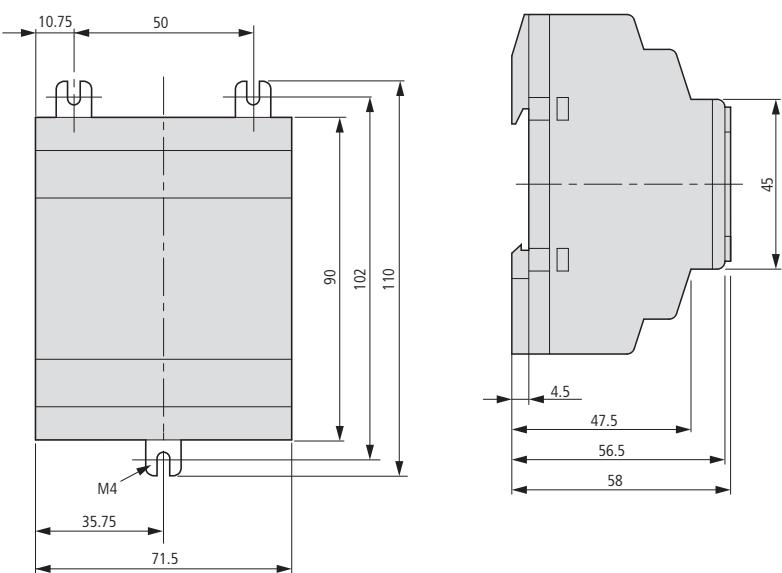

Notes

Further dimensions for EASY... and MFD... devices → Chapter 12

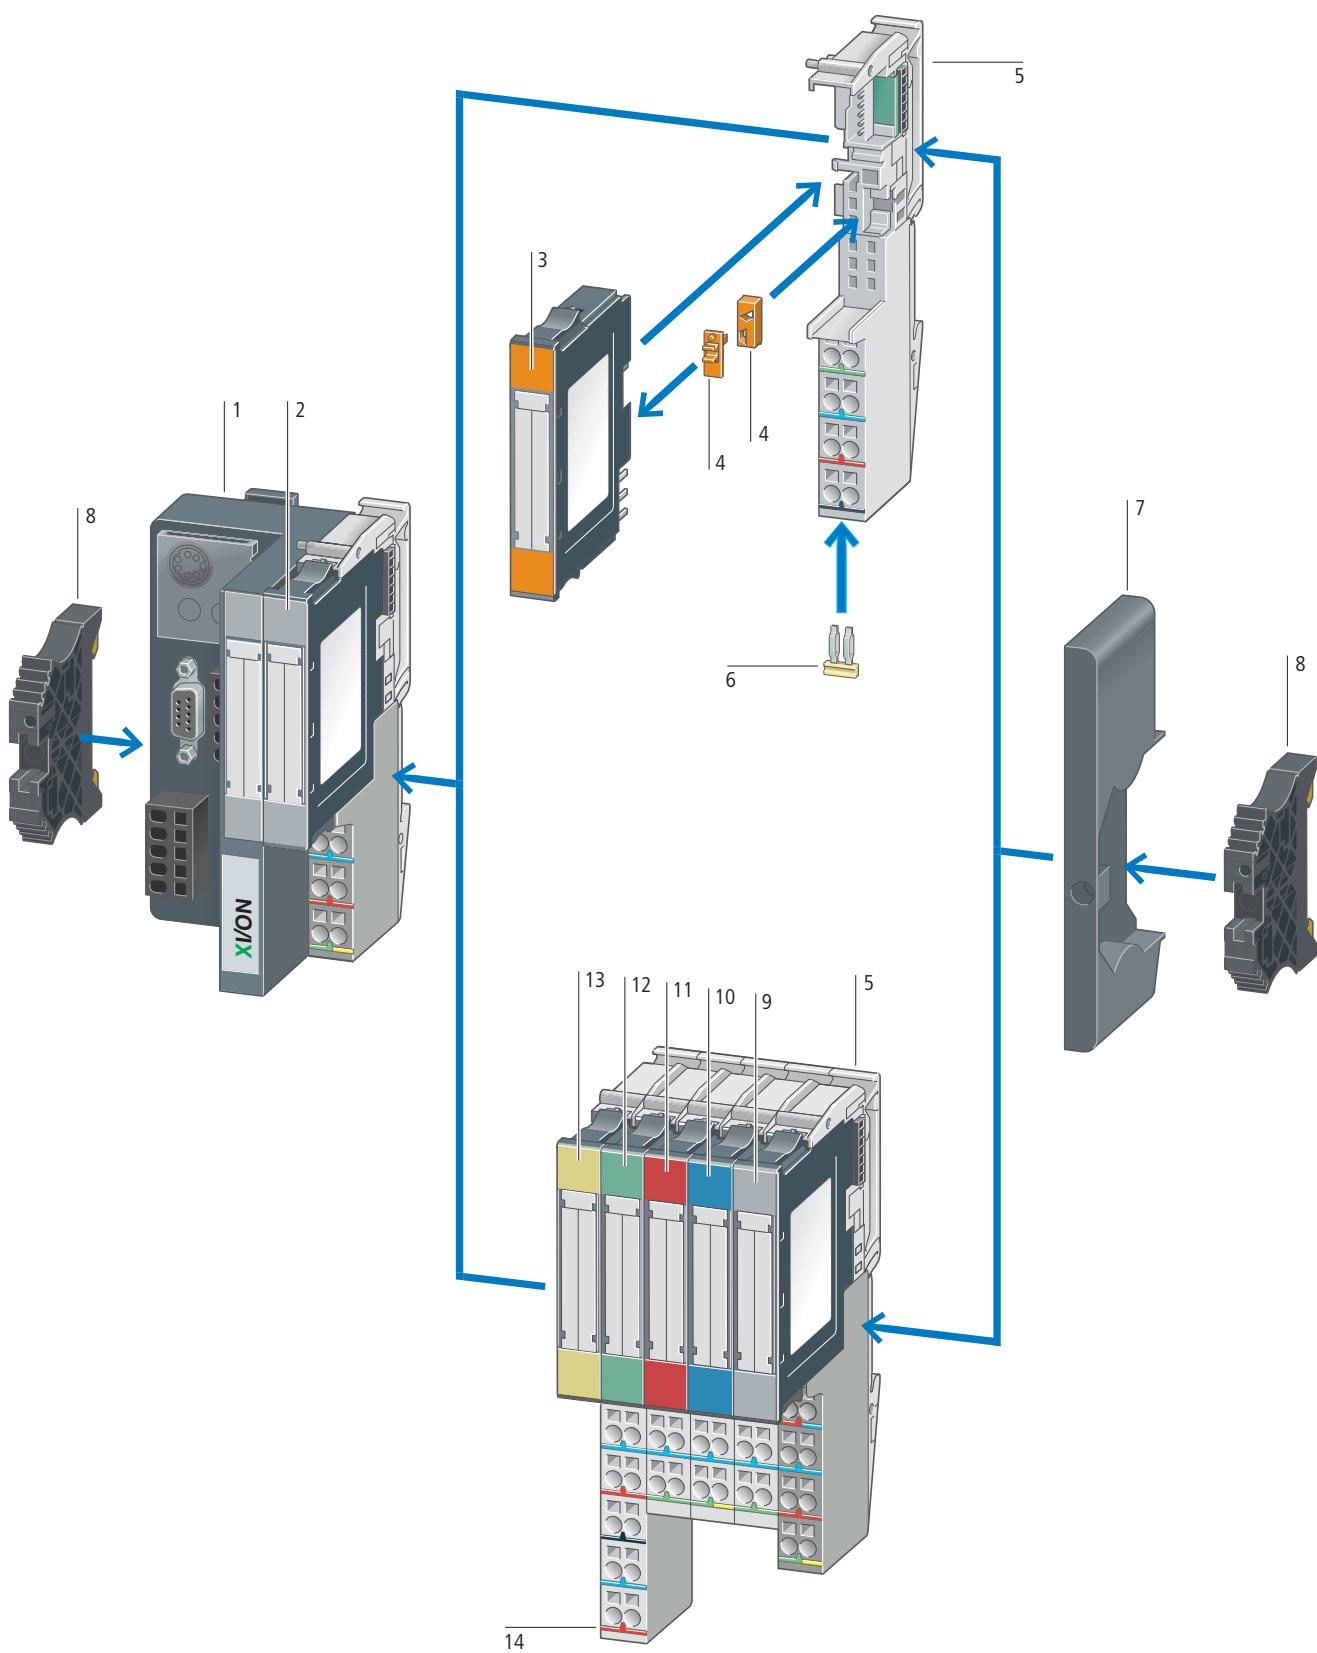


System overview

Gateways	1	Relay modules	3	Digital output modules	11	Technology modules	13
Gateways XNE:		XN electronics modules:		XNE electronics modules:		XNE electronics modules:	
XNE-GWBR-PBDP		XN-2DO-R-CO		XNE-8DO-24VDC-0.5A-P		XNE-2CNT-2PWM	
XNE-GWBR-CANOPEN		XN-2DO-R-NC		XNE-16DO-24VDC-0.5A-P		XNE-1SWIRE	
XNE-GWBR-2ETH-IP		XN-2DO-R-NO		XN electronics modules:		XN electronics modules:	
XN gateways:		→ Page 14/91		XN-2DO-24VDC-0.5A-P		XN-1CNT-24VDC	
XN-GWBR-PBDP				XN-2DO-24VDC-0.5A-N		XN-1RS232	
XN-GWBR-CANOPEN				XN-2DO-24VDC-2A-P		XN-1RS485/422	
XN-GWBR-DNET				XN-2DO-120/230VAC-0.5A		XN-1SSI	
XN-GWBR-MODBUS-TCP				XN-4DO-24VDC-0.5A-P		→ Page 14/93	
XN-PLC-CANOPEN				XN-16DO-24VDC-0.5A-P			
XN-GW-PBDP-1.5MB				XN-32DO-24VDC-0.5A-P			
XN-GW-PBDP-12MB				→ Page 14/91			
XN-GW-CANOPEN							
XN-GW-DNET							
→ Page 14/88							
Digital input modules	2	Supply modules	9	Analog output modules	12	Accessories	
XNE electronics modules:		XN electronics modules:		XNE electronics modules:		End cover	7
XNE-8DI-24VDC-P		XN-BR-24VDC-D		XNE-4AO-U/I		End bracket	8
XNE-16DI-24VDC-P		XN-PF-24VDC-D		XN electronics modules:		Relay jumpers	6
XN electronics modules:		XN-PF-120/230VAC-D		XN-1AO-I(0/4...20MA)		Marker	14
XN-2DI-24VDC-P		→ Page 14/90		XN-2AO-I(0/4...20MA)		Coding element	4
XN-2DI-24VDC-N				XN-2AO-U(-10/0...+10VDC)		Screw terminals	–
XN-2DI-120/230VAC				→ Page 14/92		→ Page 14/97	
XN-4DI-24VDC-P							
XN-4DI-24VDC-N							
XN-16DI-24VDC-P							
XN-32DI-24VDC-P							
→ Page 14/90							
Analog input modules	10						
XNE electronics modules:							
XNE-8AI-U/I-4Pt/Ni							
XN electronics modules:							
XN-1AI-I(0/4...20MA)							
XN-2AI-I(0/4...20MA)							
XN-1AI-U(-10/0...+10VDC)							
XN-2AI-U(-10/0...+10VDC)							
XN-2AI-Pt/Ni-2/3							
XN-2AI-THERMO-PI							
XN-4AI-U/I							
→ Page 14/92							



Description

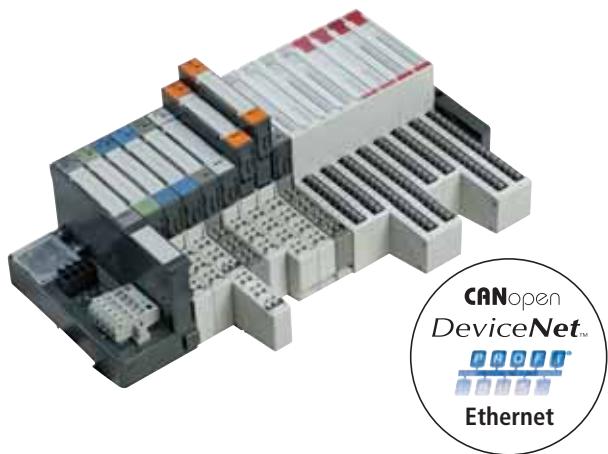

As much as necessary, as little as possible - is the design principle of the modular I/O system XI/ON, which provides a comprehensive range of digital and analog I/Os and technology modules. The gateway products are available for fieldbus systems CANopen, PROFIBUS-DP, DeviceNet and Ethernet.

XI/ON standard gateways and modules

In the standard version, the pluggable I/O modules are wired to base modules.


- Bus-independent modules
- Hot-swapping of modules
- Screw or spring-cage terminals
- Mechanical coding of modules prevents incorrect connection
- Serial interface modules allow connection of various peripherals, such as printers, scanners and bar code readers
- Programmable CANopen gateway for decentralizing automation tasks or reducing the burden on higher-level PLCs.



XI/ON ECO gateways and modules

XI/ON ECO adds cost- and space-optimized I/O modules and gateways to the XI/ON I/O system.

- High channel density: up to 16 DI/DO over 12.5 mm
- No base modules required
- Cost saving through electronics with built-in connection level
- Connection through "push-in" spring-cage terminal saves mounting time
- Can be combined with XI/ON standard
- Multi-function modules reduce the number of required slices
- ECO gateways with built-in bus termination resistors/auto-baud function.

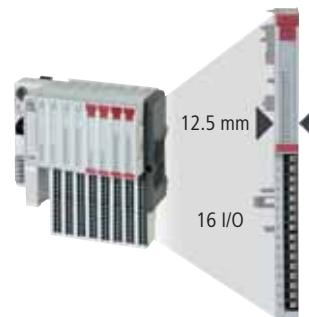

Configuration tool I/Oassistant

With the free software I/Oassistant XI/ON stations can be planned simply and conveniently.

- I/Oassistant automatically generates a complete parts list for your order. With the "Check surface mounting" function, you can easily check the configured station design.
- Commissioning the I/O level without connected controller possible; Servicing interface
- EPLAN support
- I/Oassistant can be integrated with XSOFT-CODESYS-2.



CANopen expansion modules

The EC4E modules can be connected to all control systems with CANopen master. The modules can be expanded with a digital or analog easy expansion module.



SWD I/O modules

SmartWire-Darwin station for the connecting digital I/O.



SWD gateways

Gateways for connecting to field busses PROFIBUS-DP and CANopen and for power supply of the SmartWire-Darwin nodes and switchgear.



Configuration tool SWD-Assistant


The software SWD-Assist helps you easily and quickly plan SmartWire-Darwin lines.

Free download at <http://downloadcenter.moeller.net>



	Basic modules																
Electronics modules	XN-S3...-SBB	XN-S3...-SBC	XN-S4...-SBBC	XN-S4...-SBS	XN-S4...-SBCS	XN-S4...-SBBSC	XN-S6...-SBBSSB	XN-S6...-SBCSBC	XN-B3...-SBB	XN-B3...-SBC	XN-B4...-SBBC	XN-B6...-SBBSSB	XN-B6...-SBCSBC	XN-P3...-SBB	XN-P4...-SBBC	XN-P4...-SBBBC-B	
Digital input modules																	
XN-2DI-24VDC-P	●																
XN-2DI-24VDC-N	●																
XN-2DI-120/230VAC	●			●													
XN-4DI-24VDC-P					●												
XN-4DI-24VDC-N					●												
XN-16DI-24VDC-P						●											
XN-32DI-24VDC-P							●										
XNE-8DI-24VDC-P ¹⁾								●									
XNE-16DI-24VDC-P ¹⁾									●								
Digital output modules																	
XN-2DO-24VDC-0.5A-P		●															
XN-2DO-24VDC-0.5A-N		●															
XN-2DO-24VDC-2A-P		●															
XN-2DO-120/230VAC-0.5A		●															
XN-4DO-24VDC-0.5A-P				●													
XN-16DO-24VDC-0.5A-P				●													
XN-32DO-24VDC-0.5A-P				●													
XNE-8DO-24VDC-0.5A-P ¹⁾					●												
XNE-16DO-24VDC-0.5A-P ¹⁾						●											
Relay modules																	
XN-2DO-R-NC																	
XN-2DO-R-N0																	
XN-2DO-R-C0																	
Analog input modules																	
XN-1AI-I(0/4...20MA)	●																
XN-2AI-I(0/4...20MA)	●																
XN-1AI-U(-10/0...+10VDC)	●																
XN-2AI-U(-10/0...+10VDC)	●																
XN-2AI-Pt/Ni-2/3	●																
XN-2AI-THERMO-PI																	
XN-4AI-U/I																	
XNE-8AI-U/I-4Pt/Ni ¹⁾																	
Analog output modules																	
XN-1AO-I(0/4...20MA)	●																
XN-2AO-I(0/4...20MA)	●																
XN-2AO-U(-10/0...+10VDC)	●																
XNE-4AO-U/I ¹⁾																	
Technology modules																	
XN-1CNT-24VDC																	
XN-1RS232																	
XN-1RS485/422																	
XN-1SSI																	
XNE-1SWIRE ¹⁾																	
XNE-2CNT-2PWM ¹⁾																	
Supply modules																	
XN-BR-24VDC-D															● ²⁾	● ³⁾	● ²⁾
XN-PF-24VDC-D															●	●	●
XN-PF-120/230VAC-D															●	●	●

¹⁾ No base modules required²⁾ Base module for gateway supply³⁾ Base module for bus refreshing within the station

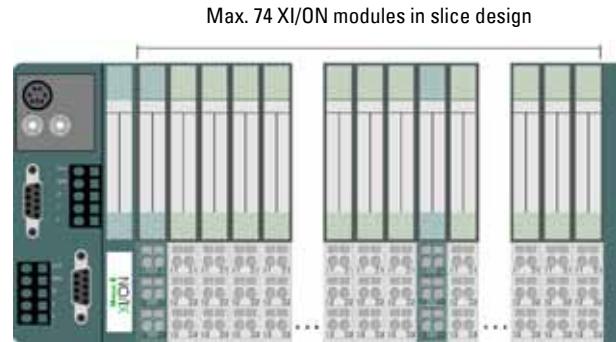

	Max. number/station	Part no. 140045 XNE-GWBR-PBDP		Part no. 140044 XNE-GWBR-CANOPEN		Part no. 140047 XNE-GWBR-2ETH-IP		Part no. 140154 XN-GWBR-PBDP		Part no. 140055 XN-GWBR-CANOPEN	
		Channels	Modules	Channels	Modules	Channels	Modules	Channels	Modules	Channels	Modules
Modules											
XN-4DI-24VDC-P		136	34	244	61	288	72	288	72	288	72
XN-4DI-24VDC-N		136	34	244	61	288	72	288	72	288	72
XN-16DI-24VDC-P		128	8	128	8	128	8	128	8	128	8
XN-32DI-24VDC-P		256	8	256	8	256	8	256	8	256	8
XNE-8DI-24VDC-P		384	48	512	64	512	64	592	74	512	64
XNE-16DI-24VDC-P		768	48	512	32	512	32	1184	74	512	32
XN-4DO-24VDC-0.5A-P		132	33	244	61	288	72	288	72	288	72
XN-16DO-24VDC-0.5A-P		128	8	128	8	128	8	128	8	128	8
XN-32DO-24VDC-0.5A-P		256	8	256	8	256	8	256	8	256	8
XNE-8DO-24VDC-0.5A-P		384	48	488	61	512	64	592	74	512	64
XNE-16DO-24VDC-0.5A-P		640	40	512	32	512	32	1168	73	512	32
XN-2DO-R...		70	35	122	61	144	72	144	72	144	72
XN-2AI-I(0/4...20MA)		56	28	100	50	126	63	78	39	144	72
XN-2AI-U(-10/0...+10VDC)		56	28	100	50	126	63	78	39	144	72
XN-2AI-Pt/Ni-2/3		44	22	98	49	126	63	46	23	144	72
XN-2AI-THERMO-PI		44	22	98	49	126	63	58 (76)	29 (38)	144	72
XN-4AI-U/I		64 (132)	16 (33)	108	27	124	31	112	28	144	36
XNE-8AI-U/I-4Pt/Ni		72 (120)	9 (15)	144	18	128	16	88	11	144	18
XN-2AO-I(0/4...20MA)		50	25	70	35	126	63	38	19	144	72
XN-2AO-U(-10/0...+10VDC)		46	23	70	35	126	63	38	19	144	72
XNE-4AO-U/I		64 (76)	16 (19)	108	27	64	16	36	9	144	36
XN-1CNT-24VDC		13	13	27	27	31	31	7	7	72	72
XN-1RS232		7	7	27	27	31	31	22	22	68	68
XN-1RS485/422		16	16	27	27	31	31	22	22	72	72
XN-1SSI		20	20	27	27	31	31	22	22	72	72



Notes

Numeric values in brackets: max. number when diagnostic alarm disabled.

The supply module XN-BR-24VDC-D must be mounted immediately next to the gateway XN-GW-... to provide power for the gateways.

Part no. 140156 XN-GWBR-DNET	Part no. 140162 XN-GWBR-MODBUS-TCP	Part no. 140049 XN-GW-PBDP-1.5MB		Part no. 140048 XN-GW-PBDP-12MB		Part no. 140050 XN-GW-CANOPEN		Part no. 140051 XN-GW-DNET	
		Channels	Modules	Channels	Modules	Channels	Modules	Channels	Modules
288	72	288	72	288	72	288	72	288	72
288	72	288	72	288	72	288	72	288	72
128	8	128	8	128	8	128	8	128	8
256	8	256	8	256	8	256	8	256	8
576	72	512	64						
1152	72	512	32						
128	32	288	72	288	72	288	72	288	72
128	8	128	8	128	8	128	8	128	8
256	8	256	8	256	8	256	8	256	8
256	32	512	64						
512	32	512	32						
64	32	144	72	144	72	144	72	144	72
32	16	144	72	78	39	78	39	144	72
32	16	144	72	78	39	78	39	144	72
32	16	144	72	46	23	46	23	142	71
32	16	144	72	58 (76)	29 (38)	58 (76)	29 (38)	142	71
64	16	144	36	112	28	112	28	144	36
128	16	144	18						
32	16	144	72	38	19	38	19	142	71
32	16	144	72	38	19	38	19	142	71
64	16	124	31						
16	16	72	72	7	7	7	7	71	31
8	8	68	68	22	22	22	22	67	31
8	8	72	72	22	22	22	22	70	31
8	8	72	72	22	22	22	22	71	31

Ordering

Fieldbus connection	Terminal capacity (field bus/supply voltage)	Servicing interface	Transfer rate	Part no. Article no.	Price See price list	Std. pack	
Gateway XNE with integrated supply							
	<ul style="list-style-type: none"> Supports up to 48 slice-type modules (XN, XNE) Address setting through DIP switch Address range: 1 – 125 (dec.) 	PROFIBUS-DP (DPV0/DPV1 protocol)	Push-in spring-cage terminals	PS/2 socket	9.6 kbit/s to 12 Mbit/s	XNE-GWBR-PBDP ¹⁾ 140045	1 off  
	<ul style="list-style-type: none"> Supports up to 62 disc type modules (XN, XNE) Address set with DIP switch Address range: 1 – 63 (dec.) 	CANopen	Push-in spring-cage terminals	PS/2 socket	1000 kbit/s 800 kbit/s 500 kbit/s 250 kbit/s 125 kbit/s 50 kbit/s 20 kbit/s	XNE-GWBR-CANOPEN ¹⁾ 140044	1 off  
	<ul style="list-style-type: none"> Supports up to 74 disc type modules (XN, XNE) 2 x RJ45 socket Address set with decimal rotary coding switches, BootP, DHCP or I/Oassistant Address range: 1 – 254 (dec.) 	Ethernet (Ethernet-IP protocol)	Push-in spring-cage terminals	Mini USB	10/100 MBit/s	XNE-GWBR-2ETH-IP ¹⁾ 140047	1 off  
XN-Gateway with integrated supply							
	<ul style="list-style-type: none"> Supports up to 74 disc type modules (XN, XNE) 1 x D-sub 9-pin socket Address set with two decimal rotary coding switches Address range: 1 – 99 (dec.) 	PROFIBUS-DP (DPV0 protocol)	Screw terminals	PS/2 socket	9.6 kbit/s to 12 Mbit/s	XN-GWBR-PBDP ¹⁾ 140154	1 off  
	<ul style="list-style-type: none"> Supports up to 74 disc type modules (XN, XNE) 1 x open-style connector Address set with two decimal rotary coding switches Address range: 1 – 99 (dec.) 	CANopen	Screw terminals	PS/2 socket	1000 kbit/s 800 kbit/s 500 kbit/s 250 kbit/s 125 kbit/s 50 kbit/s 20 kbit/s 10 kbit/s	XN-GWBR-CANOPEN ¹⁾ 140155	1 off  
	<ul style="list-style-type: none"> Supports up to 74 disc type modules (XN, XNE) 1 x open-style connector Address set with two decimal rotary coding switches Address range: 0 – 63 (dec.) 	DeviceNet	Screw terminals	PS/2 socket	500 kbit/s 250 kbit/s 125 kbit/s	XN-GWBR-DNET ¹⁾ 140156	1 off  

Notes

¹⁾ Bus refreshing modules is already integrated.

The following are included as standard with all gateways:
2 x end bracket XN-WEW-32/2-SW,
1 x end plate XN-ABPL

Information relevant for export to North America

²⁾ Product Standards
NA Certification
Degree of Protection

IEC/EN 6113-2; CE marking
Request filed for UL and CSA
IEC: IP20, UL/CSA Type: -

³⁾ Product Standards
NA Certification
Degree of Protection

IEC/EN 6113-2; CE marking
Planned for UL and CSA
IEC: IP20, UL/CSA Type: -






⁴⁾ Product Standards

UL 508; cUL

IEC/EN 6113-2; CE marking
E205091
NRAQ, NRAQ7
UL report applies to both US and Canada
-
NA Certification
Degree of Protection

IEC: IP20, UL/CSA Type: -
UL Recognized, certified by UL for use in Canada
IEC: IP20, UL/CSA Type: -

HPL14089EN

Fieldbus connection	Terminal capacity (field bus/supply voltage)	Servicing interface	Transfer rate	Part no. Article no.	Price See price list	Std. pack	
	<ul style="list-style-type: none"> Supports up to 74 disc type modules (XN, XNE) 1 x RJ45 socket Address set with decimal rotary coding switches, BootP, DHCP or I/Oassistant Address range: 1...254 (dec.) 	Ethernet (Modbus-TCP protocol) Screw terminals	PS/2 socket	10/100 MBit/s	XN-GWBR-MODBUS-TCP ¹⁾³⁾ 140162	1 off  	
XN-Gateway with integrated supply, programmable							
	<ul style="list-style-type: none"> Supports up to 74 disc type modules (XN, XNE to limited extent) 1 x open-style connector Operating mode and address setting with two hexadecimal rotary coding switches Address range: 1– 99 (dec.) 	CANopen Screw terminals	PS/2 socket	Adjustable up to 1 Mbit/s	XN-PLC-CANOPEN ¹⁾⁴⁾ 140157	1 off  	
XN gateway without integrated supply							
	<ul style="list-style-type: none"> Supports up to 74 disc type modules (XN) 2 x D-sub 9-pin sockets Address setting with two hexadecimal rotary coding switches Address range: 1– 125 (dec.) 	PROFIBUS-DP (DPV0 protocol)	2 x spring-cage terminal strips for direct wiring	PS/2 socket	9.6 Kbit/s to 1.5 Mbit/s	XN-GW-PBDP-1.5MB ²⁾⁴⁾ 140049	1 off  
	<ul style="list-style-type: none"> Supports up to 74 disc type modules (XN) 1 x D-sub 9-pin socket Address setting with two hexadecimal rotary coding switches Address range: 1– 125 (dec.) 	PROFIBUS-DP (DPV0 protocol)	–	PS/2 socket	9.6 kbit/s to 12 Mbit/s	XN-GW-PBDP-12MB ²⁾⁴⁾ 140048	1 off  
	<ul style="list-style-type: none"> Supports up to 74 disc type modules (XN) 1 x 9 pole SUB-D socket, 1 x D-sub 9-pin Address setting with two hexadecimal rotary coding switches Address range: 1– 127 (dec.) 	CANopen	2 x spring-cage terminals for direct wiring	PS/2 socket	1000 kbit/s 800 kbit/s 500 kbit/s 250 kbit/s 125 kbit/s 50 kbit/s 20 kbit/s 10 kbit/s	XN-GW-CANOPEN ²⁾⁴⁾ 140050	1 off  
	<ul style="list-style-type: none"> Supports up to 64 disc type modules (XN) 1 x open-style connector Address set with two decimal rotary coding switches Address range: 0...63 (dec) 	DeviceNet	–	PS/2 socket	500 kbit/s 250 kbit/s 125 kbit/s	XN-GW-DNET ²⁾⁴⁾ 140051	1 off  

Notes¹⁾ Bus refreshing modules is already integrated.²⁾ The supply module XN-BR-24VDC-D must be mounted immediately next to the gateway to provide the supply for the gateways.

The following are included as standard with all gateways:

2 x end bracket XN-WEW-32/2-SW,
1 x end plate XN-ABPL**Information relevant for export to North America**³⁾ Product Standards IEC/EN 6113-2; CE marking
Degree of Protection IEC: IP20, UL/CSA Type: -⁴⁾ Product Standards UL 508; cUL; IEC/EN 6113-2;
CE marking

UL File No.

UL CCN

CSA File No.

CSA Class No.

NA Certification

Degree of Protection UL report applies to both US and Canada

-

UL Recognized, certified by UL for use in Canada

IEC: IP20, UL/CSA Type: -

Description	For use with	Part no. Article no.	Price See price list	Std. pack
Bus refreshing modules				
Slice modules XN	Provides system and field power System power supply 24 V DC for generation of power for module bus and gateway (XN-GW-...) Field power supply at a rated voltage of 24 V DC	XN-P3T-SBB XN-P3S-SBB XN-P4T-SBBC XN-P4S-SBBC XN-P3T-SBB-B XN-P3S-SBB-B XN-P4T-SBBC-B XN-P4S-SBBC-B	XN-BR-24VDC-D 140071	1 off  
Power feeding modules				
Slice modules XN	Field power supply at a rated voltage of 24 V DC	XN-P3T-SBB XN-P3S-SBB XN-P4T-SBBC XN-P4S-SBBC	XN-PF-24VDC-D 140070	1 off  
	Field power supply at a rated voltage of 120/230 V AC nominal voltage	XN-P3T-SBB XN-P3S-SBB XN-P4T-SBBC XN-P4S-SBBC	XN-PF-120/230VAC-D 140072	
Digital input modules				
Slice modules XN	2 digital inputs, 24 V DC Positive switching	XN-S3T-SBB XN-S3S-SBB	XN-2DI-24VDC-P 140056	1 off  
	2 digital inputs, 24 V DC Negative switching	XN-S4T-SBBC XN-S4S-SBBC	XN-2DI-24VDC-N 140057	
	2 digital inputs, 120/230 V AC		XN-2DI-120/230VAC 140058	
	4 digital inputs, 24 V DC Positive switching	XN-S4T-SBBS XN-S4S-SBBS	XN-4DI-24VDC-P 140052	
	4 digital inputs, 24 V DC Negative switching	XN-S6T-SBBSBB XN-S6S-SBBSBB	XN-4DI-24VDC-N 140059	
Block modules XN	16 digital inputs, 24 V DC Positive switching	XN-B3T-SBB XN-B3S-SBB XN-B4T-SBBC XN-B4S-SBBC	XN-16DI-24VDC-P 140142	
	32 digital inputs, 24 V DC Positive switching	XN-B6T-SBBSBB XN-B6S-SBBSBB	XN-32DI-24VDC-P 140147	
Slice modules XNE	8 digital inputs, 24 V DC Positive switching	-	XNE-8DI-24VDC-P 140035	
	16 digital inputs, 24 V DC Positive switching	-	XNE-16DI-24VDC-P 140040	

Information relevant for export to North America



Product Standards	UL 508; cUL; IEC/EN 6113-2; CE marking
UL File No.	E205091
UL CCN	NRAQ, NRAQ7
CSA File No.	UL report applies to both US and Canada
CSA Class No.	-
NA Certification	UL Recognized, certified by UL for use in Canada
Degree of Protection	IEC: IP20, UL/CSA Type: -

HPL14091EN

Description		For use with	Part no. Article no.	Price See price list	Std. pack
Digital output modules					
Slice modules XN	2 digital outputs, 24 V DC/0.5 A Positive switching	XN-S3T-SBC XN-S3S-SBC XN-S4T-SBCS XN-S4S-SBCS	XN-2DO-24VDC-0.5A-P 140053		1 off 
	2 digital outputs, 24 V DC/0.5 A Negative switching		XN-2DO-24VDC-0.5A-N 140060		
	2 digital outputs, 24 V DC/2 A Positive switching		XN-2DO-24VDC-2A-P 140055		
	2 digital outputs, 120/230 V AC/0.5 A		XN-2DO-120/230VAC-0.5A 140150		
	4 digital outputs, 24 V DC/0.5 A Positive switching	XN-S4T-SBCS XN-S4S-SBCS XN-S6T-SBCSBC XN-S6S-SBCSBC	XN-4DO-24VDC-0.5A-P 140148		
Block modules XN	16 digital outputs, 24 V DC/0.5 A Positive switching	XN-B3T-SBC XN-B3S-SBC	XN-16DO-24VDC-0.5A-P 140141		
	32 digital outputs, 24 V DC/0.5 A Positive switching	XN-B6T-SBCSBC XN-B6S-SBCSBC	XN-32DO-24VDC-0.5A-P 140161		
Slice modules XNE	8 digital outputs, 24 V DC/0.5 A Positive switching	—	XNE-8DO-24VDC-0.5A-P 140036		
	16 digital outputs, 24 V DC/0.5 A Positive switching	—	XNE-16DO-24VDC-0.5A-P 140039		
Relay modules					
Slice modules XN	2 changeover contacts, isolated 230 V AC / 30 V DC	XN-S4T-SBBS XN-S4S-SBBS	XN-2DO-R-CO 140054		1 off 
	2 NC 230 V AC / 30 V DC	XN-S4T-SBBS XN-S4S-SBBS	XN-2DO-R-NC 140061		
	2 N/O 230 V AC / 30 V DC	XN-S4T-SBCS XN-S4S-SBCS	XN-2DO-R-NO 140062		

Information relevant for export to North America

Product Standards	UL 508; cUL; IEC/EN 6113-2; CE marking
UL File No.	E205091
UL CCN	NRAQ, NRAQ7
CSA File No.	UL report applies to both US and Canada
CSA Class No.	-
NA Certification	UL Recognized, certified by UL for use in Canada
Degree of Protection	IEC: IP20, UL/CSA Type: -



	Description	For use with	Part no. Article no.	Price See price list	Std. pack
Analog input modules					
Slice modules XN	1 analog input 0/4 to 20 mA	XN-S3T-SBB XN-S3S-SBB	XN-1AI-I(0/4...20MA) ¹⁾ 140063		1 off  
	2 analog inputs 0/4 to 20 mA	XN-S4T-SBBS XN-S4S-SBBS	XN-2AI-I(0/4...20MA) ¹⁾ 140144		
	1 analog input -10/0 to +10 V DC		XN-1AI-U(-10/0...+10VDC) ¹⁾ 140064		
	2 analog inputs -10/0 to +10 V DC		XN-2AI-U(-10/0...+10VDC) ¹⁾ 140145		
	2 analog inputs Reading of standardized signals for temperature measurement Connection of RTDs Pt100, Pt200, Pt500, Pt1000, Ni100, Ni1000, and Ni1000TK5000 in 2- or 3-wire circuit		XN-2AI-Pt/Ni-2/3 ¹⁾ 140067		
	2 analog inputs Acquisition of normalized signals for measuring temperatures or voltages up to ± 1 V Connection of thermocouples of types B, E, J, K, N, R, S, T	XN-S4T-SBBS-CJ XN-S4S-SBBS-CJ	XN-2AI-THERMO-PI ¹⁾ 140068		
	4 analog inputs -10/0 to +10 V DC, 0/4 to 20 mA Selectable for channel	XN-S6T-SBCSBC XN-S6S-SBCSBC	XN-4AI-U/I ¹⁾ 140158		
Slice modules XNE	8 analog inputs U/I or 4 analog inputs Pt/Ni -10/0 to +10 V DC, 0/4 to 20 mA Reading of standardized signals for temperature measurement Connection of RTDs Pt100, Pt200, Pt500, Pt1000, Ni100, Ni1000, and Ni1000TK5000, Ni1000TK5000 in 2- or 3-wire circuit Selectable for channel	-	XNE-8AI-U/I-4Pt/Ni ²⁾ 140037		
Analog output modules					
Slice modules XN	1 analog output 0/4 to 20 mA	XN-S3T-SBB XN-S3S-SBB	XN-1AO-I(0/4...20MA) ³⁾ 140065		1 off  
	2 analog outputs 0/4 to 20 mA		XN-2AO-I(0/4...20MA) ³⁾ 140146		
	2 analog outputs -10/0 to +10 V DC		XN-2AO-U(-10/0...+10VDC) ³⁾ 140066		
Slice modules XNE	4 analog outputs -10/0 to +10 V DC, 0/4 to 20 mA Selectable for channel	-	XNE-4AO-U/I ⁴⁾ 140034		

Information relevant for export to North America



1)

Product Standards	UL 508; cUL; IEC/EN 6113-2; CE marking
UL File No.	E205091
UL CCN	NRAQ, NRAQ7
CSA File No.	UL report applies to both US and Canada
CSA Class No.	-
NA Certification	UL Recognized, certified by UL for use in Canada
Degree of Protection	IEC: IP20, UL/CSA Type: -

2)

Product Standards	IEC/EN 6113-2; CE marking
NA Certification	Request filed for UL and CSA
Degree of Protection	IEC: IP20, UL/CSA Type: -


3)



Product Standards	UL 508; cUL; IEC/EN 6113-2; CE marking
UL File No.	E205091
UL CCN	NRAQ, NRAQ7
CSA File No.	UL report applies to both US and Canada
CSA Class No.	-
NA Certification	UL Recognized, certified by UL for use in Canada
Degree of Protection	IEC: IP20, UL/CSA Type: -

4)






Product Standards	IEC/EN 6113-2; CE marking
NA Certification	Request filed for UL and CSA
Degree of Protection	IEC: IP20, UL/CSA Type: -

HPL14093EN

Description		For use with	Part no. Article no.	Price See price list	Std. pack	Information relevant for export to North America	
Counter modules							
Slice modules XN 	1 digital input/24 V DC 1 digital output/24 V DC Counting modes: infinite, once only or periodic count Frequency, rotational speed or period duration count Reading signals from rotary encoders (track A/B)	XN-S4T-SBBS XN-S4S-SBBS	XN-1CNT-24VDC 140069		1 off  	Product Standards UL 508; cUL; IEC/EN 6113-2; CE marking E205091 UL File No. UL CCN CSA File No. CSA Class No. NA Certification	UL 508; cUL; IEC/EN 6113-2; CE marking E205091 NRAQ, NRAQ7 UL report applies to both US and Canada - UL Recognized, certified by UL for use in Canada IEC: IP20, UL/CSA Type: -
Serial interfaces							
Slice modules XN 	Data transfer rate adjustable up to 115200 bit/s Data transfer rate adjustable up to 115200 bit/s Connection of SSI encoders up to 32-bit. Data transfer rate adjustable up to 1 bit/s	XN-S4T-SBBS XN-S4S-SBBS	XN-1RS232 140151 XN-1RS485/422 140152 XN-1SSI 140153		1 off  	Product Standards UL 508; cUL; IEC/EN 6113-2; CE marking E205091 UL File No. UL CCN CSA File No. CSA Class No. NA Certification	UL 508; cUL; IEC/EN 6113-2; CE marking E205091 NRAQ, NRAQ7 UL report applies to both US and Canada - UL Recognized, certified by UL for use in Canada IEC: IP20, UL/CSA Type: -
SmartWire-Darwin Interface							
Slice modules XNE 	Connection of up to 16 motor starters (Eaton) Up to 3 XNE-1SWIRE for XI/ON node	-	XNE-1SWIRE 140043		1 off  	Product Standards NA Certification	IEC/EN 6113-2; CE marking Request filed for UL and CSA IEC: IP20, UL/CSA Type: -
Counter/PWM modules							
Slice modules XNE 	2 counter channels and 2 PWM channels Counting modes: infinite, once only or periodic count Frequency, rotational speed or period duration count Reading signals from rotary encoders (track A/B) Output of a defined digital signal Output of a defined number of pulses	-	XNE-2CNT-2PWM 140038		1 off  	Product Standards NA Certification Degree of Protection	IEC/EN 6113-2; CE marking Planned for UL and CSA IEC: IP20, UL/CSA Type: -



Description	For use with	Part no. Article no.	Price See price list	Std. pack	Information relevant for export to North America
Basic modules					
Spring-cage terminals					
• 3 connection levels					
Slice modules	 <ul style="list-style-type: none"> Base module for field power supply Base module for the gateway supply (with XN-BR-24VDC-D) Base module for bus refresh within the station – Connection to C rail – Connection to C rail 	XN-BR-24VDC-D XN-PF-24VDC-D XN-PF-120/230VAC-D XN-BR-24VDC-D XN-2DI-... XN-1AI-... XN-2AI-I(0/4...20MA) XN-2AI-U(-10/0...+10VDC) XN-2AI-Pt/Ni-2/3 XN-1AO-I(0/4...20MA) XN-2AO-...	XN-P3T-SBB 140074 XN-P3T-SBB-B 140073 XN-S3T-SBB 140077 XN-S3T-SBC 140079 XN-B3T-SBB 140133 XN-B3T-SBC 140134	1 off 	Product Standards UL 508; cUL; IEC/EN 6113-2; CE marking E205091 NRAQ, NRAQ7 UL report applies to both US and Canada CSA Class No. NA Certification Degree of Protection
Block modules	 <ul style="list-style-type: none"> – – – 	XN-2DO-24VDC-... XN-2DO-120/230VAC-0.5A XN-16DI-24VDC-P XN-16DO-24VDC-0.5-P			
• 4 connection levels					
Slice modules	 <ul style="list-style-type: none"> Base module for field power supply Base module for the gateway supply (with XN-BR-24VDC-D) Connection to C rail Base module for bus refresh within the station Connection to C rail Connection to C rail – Base module with temperature sensors for cold-junction compensation 	XN-BR-24VDC-D XN-PF-24VDC-D XN-PF-120/230VAC-D XN-BR-24VDC-D XN-2DI-24VDC-P XN-2DI-24VDC-N XN-2DI-120/230VAC XN-2DO-24VDC-... XN-2DO-120/230VAC-0.5A XN-4DO-24VDC-0.5A-P XN-2DO-R-NO XN-2DO-R-NC XN-4DI-... XN-2DO-R-... XN-1AI-... XN-2AI-I(0/4...20MA) XN-2AI-U(-10/0...+10VDC) XN-2AI-Pt/Ni-2/3 XN-1CNT-24VDC XN-1RS-...	XN-P4T-SBBC 140076 XN-P4T-SBBC-B 140075 XN-S4T-SBBC 140078 XN-S4T-SBCS 140080 XN-S4T-SBBS 140081 XN-S4T-SBBS-CJ 140084	1 off 	Product Standards UL 508; cUL; IEC/EN 6113-2; CE marking E205091 NRAQ, NRAQ7 UL report applies to both US and Canada CSA Class No. NA Certification Degree of Protection



HPL14095EN




Description		For use with	Part no. Article no.	Price See price list	Std. pack	Information relevant for export to North America
• 4 connection levels						
Block modules	Connection to C rail	XN-16DI-24VDC-P	XN-B4T-SBBC 140135		1 off	Product Standards UL 508; cUL; IEC/EN 6113-2; CE marking E205091 UL File No. UL CCN CSA File No. CSA Class No. NA Certification
						
Slice modules	–	XN-4DI-24VDC-P XN-4DI-24VDC-N	XN-S6T-SBBSBB 140082		1 off	UL Report applies to both US and Canada
		Connection to C rail	XN-4DO-24VDC-0.5A-P XN-4AI-U/I	XN-S6T-SBCSBC 140083		
Block modules	–	XN-32DI-24VDC-P	XN-B6T-SBBSBB 140136		1 off	UL Recognized, certified by UL for use in Canada
		Connection to C rail	XN-32DO-24VDC-0.5A-P	XN-B6T-SBCSBC 140159		IEC: IP20, UL/CSA Type: -
• 3 connection levels						
Slice modules	Base module for field power supply Base module for the gateway supply (with XN-BR-24VDC-D)	XN-BR-24VDC-D XN-PF-24VDC-D XN-PF-120/230VAC-D	XN-P3S-SBB 140085		1 off	Product Standards UL 508; cUL; IEC/EN 6113-2; CE marking E205091 UL File No. UL CCN CSA File No.
		–	XN-2DI-24VDC-P XN-2DI-24VDC-N XN-2DI-120/230VAC XN-1AI-... XN-2AI-I(0/4...20MA) XN-2AI-U(-10/0...+10VDC) XN-2AI-Pt/Ni-2/3 XN-1AO-I(0/4...20MA) XN-2AO-...	XN-S3S-SBB 140088		UL report applies to both US and Canada
		Connection to C rail	XN-2DO-24VDC-... XN-2DO-120/230VAC-0.5A	XN-S3S-SBC 140090		
Block modules	–	XN-16DI-24VDC-P	XN-B3S-SBB 140137		1 off	CSA Class No. NA Certification
		Connection to C rail	XN-16DO-24VDC-0.5A-P	XN-B3S-SBC 140138		UL Recognized, certified by UL for use in Canada
• 4 connection levels						
Slice modules	Base module for field power supply Base module for the gateway supply (with XN-BR-24VDC-D) Connection to C rail	XN-BR-24VDC-D XN-PF-24VDC-D XN-PF-120/230VAC-D	XN-P4S-SBBC 140087		1 off	Degree of Protection IEC: IP20, UL/CSA Type: -
						

	Description	For use with	Part no. Article no.	Price See price list	Std. pack	Information relevant for export to North America
Screw terminals • 4 connection levels						
Slice modules	Base module for bus refresh within the station Connection to C rail	XN-BR-24VDC-D	XN-P4S-SBBC-B 140086		1 off	Product Standards UL 508; cUL; IEC/EN 6113-2; CE marking E205091 NRAQ, NRAQ7 UL File No. UL CCN CSA File No. CSA Class No. NA Certification Degree of Protection
	Connection to C rail	XN-2DI-24VDC-P XN-2DI-24VDC-N XN-2DI-120/230VAC	XN-S4S-SBBC 140089			UL report applies to both US and Canada
	Connection to C rail	XN-2DO-24VDC-... XN-2DO-120/230VAC-0.5A XN-4DO-24VDC-0.5A-P XN-2DO-R-NO XN-2DO-R-NC	XN-S4S-SBCS 140091			-
	-	XN-4DI-... XN-2DO-R-... XN-1AI-... XN-2AI-I(0/4...20MA) XN-2AI-U(-10/0...+10VDC) XN-2AI-Pt/Ni-2/3 XN-1CNT-24VDC XN-1RS... XN-1SSI	XN-S4S-SBBS 140092			UL Recognized, certified by UL for use in Canada IEC: IP20, UL/CSA Type: -
	Base module with temperature sensors for cold-junction compensation	XN-2AI-THERMO-PI	XN-S4S-SBBS-CJ 140095			
Block modules	Connection to C rail	XN-16DI-24VDC-P	XN-B4S-SBBC 140139			
• 6 connection levels						
Slice modules	-	XN-4DI-24VDC-P XN-4DI-24VDC-N	XN-S6S-SBBSBB 140093		1 off	
	Connection to C rail	XN-4DO-24VDC-0.5A-P XN-4AI-U/I	XN-S6S-SBCSBC 140094			
Block modules	-	XN-32DI-24VDC-P	XN-B6S-SBBSBB 140140			
	Connection to C rail	XN-32DO-24VDC-0.5A-P	XN-B6S-SBCSBC 140160			


HPL14097EN

Inputs							Outputs		Supply voltage connection	Part no. Article no.	Price See price list	Std. pack	Information relevant for export to North America												
Digital	Analog	Of which usable as digital	Relay 10 A (UL)	Transistor	Analog								 												
I/O expansion modules																									
Can be used through CANopen for: XC100/200, EC4P, MFD4																									
	6	-	-	4	-	-	24 V DC	EC4E-221-6D4R1 114296		1 off	 	NA Certification	Requestfiled for UL and CSA												
	6	-	-	-	4	-	24 V DC	EC4E-221-6D4T1 114297		1 off	 	Degree of Protection	IEC: IP20, UL/CSA Type: -												
Notes	Technical data for the EASY...expansion units → Chapter 12																								
SWD gateways																									
Gateway for connecting to the fieldbus and for supplying the SmartWire-Darwin (SWD) slaves and switchgear.																									
	Connection to PROFIBUS-DP as slave. Automatic baud rate detection from 9.6 kbit/s to 12 Mbit/s. Address range 1 - 126. D-sub 9-pin socket. Connection of up to 58 SWD slaves.					EU5C-SWD-DP 116308		1 off	 	NA Certification	Requestfiled for UL and CSA														
	Connection to CANopen as slave. Automatic baud rate detection from 10 kbit/s to 1 Mbit/s. Address range 1 - 32. D-sub 9-pin plug. Connection of up to 99 SWD slaves.					EU5C-SWD-CAN 116307																			
SWD I/O modules																									
SmartWire-Darwin slaves for the connecting digital I/O.																									
	Digital module with 8 digital inputs 24 V DC					EU5E-SWD-8DX 116381		1 off	 	NA Certification	Requestfiled for UL and CSA														
	Digital module with 4 digital inputs 24 V DC and 4 transistor outputs 24 V DC/0.5 A					EU5E-SWD-4D4D 116382																			
	Digital module with 4 digital inputs 24 V DC and 2 relay outputs 250 V AC					EU5E-SWD-4D2R 116383																			
Coding elements																									
	Included as standard with every electronics module. Prevents incorrect connection of the electronics modules.					For use with XN-...DI-24VDC... XN-2DI-120/230VAC XN-xDO-24VDC... XN-2DO-R-NO XN-2DO-R-NC XN-2DO-R-CO XN-1AI-I(0/4...20MA) XN-2AI-I(0/4...20MA) XN-1AI-U(-10/0...+10VDC) XN-2AI-U(-10/0...+10VDC) XN-2AI-Pt/Ni-2/3 XN-2AI-THERMO-PI XN-4AI-U/I XN-1AO-I(0/4...20MA) XN-2AO-I(0/4...20MA) XN-2AO-U(-10/0...+10VDC) XN-1CNT-24VDC XN-1RS232 XN-1RS485/422 XN-1SSI XN-BR-24VDC-D XN-PF-24VDC-D XN-PF-120/230VAC-D	XN-KO/2 140114 XN-KO/5 140117 XN-KO/6 140118 XN-KO/8 140119 XN-KO/9 140120 XN-KO/10 140121 XN-KO/11 140122 XN-KO/12 140123 XN-KO/13 140124 XN-KO/14 140125 XN-KO/15 140126 XN-KO/16 140127 XN-KO/17 140128	1 off	 	UL/CSA certification not required															


Description	For use with	Part no. Article no.	Price See price list	Std. pack	Information relevant for export to North America
Relay jumpers					
	1-grid	—	XN-QV/1 140097	1 off	UL/CSA certification not required
	2-grid	—	XN-QV/2 140098		
	3-grid	—	XN-QV/3 140099		
	4-grid	—	XN-QV/4 140100		
	5-grid	—	XN-QV/5 140101		
	6-grid	—	XN-QV/6 140102		
	7-grid	—	XN-QV/7 140103		
	8-grid	—	XN-QV/8 140104		
End bracket					
	For fixing the XI/ON station on the top-hat rail. 2 end brackets are supplied as standard with the gateways.	—	XN-WEW-35/2- SW 140130	1 off	UL/CSA certification not required
End cover					
	For covering an XI/ON station. An end cover is supplied with the gateway as standard	—	XN-ABPL 140129	1 off	UL/CSA certification not required
Connection level labels					
	Blue	—	XN-ANBZ-BL 140105	1 off	UL/CSA certification not required
	Red	—	XN-ANBZ-RT 140106		
	Green	—	XN-ANBZ-GN 140107		
	Black	—	XN-ANBZ-SW 140108		
	Brown	—	XN-ANBZ-BR 140109		
	Red/blue	—	XN-ANBZ-RT/ BL-BED 140110		
	Yellow/green	—	XN-ANBZ-GN/ GE-BED 140111		
	White	—	XN-ANBZ-WS 140112		
Shield connection for gateway					
—	Shield connection for direct bus connection. Can be used only for XI/ON gateways XN-GW-PBDP-1.5MB and XN-GW-CANOPEN.	—	SCH-1- WINBLOC 140236	1 off	UL/CSA certification not required
Servicing cable					
—	Establishes the connection between I/O assistant and the service interface at the gateway.	—	XN-PS2-CABLE 140096	1 off	UL/CSA certification not required
Labels					
—	A5 sheet, perforated, 1 x 57 labels	—	XN-LABEL/ SCHEIBE 140131	1 off	UL/CSA certification not required
—	A5 sheet, perforated, 1 x 6 labels	—	XN-LABEL/ BLOCK 140132		

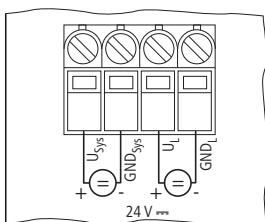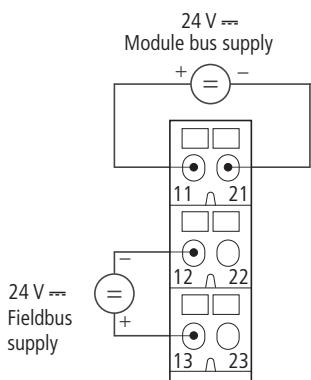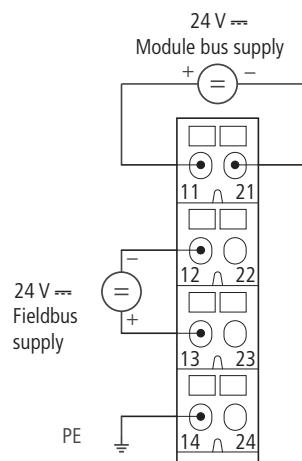Engineering**Gateway XN...GWBR...**24 V supply from gateway (U_L) and system bus (U_{sys})**Bus refreshing modules**XN-P3x-SBB with gateway power supply
XN-P3...-SBB-B without gateway power supplyXN-P4...-SBBC with gateway power supply
XN-P4...-SBBC-B without gateway power supply**Power feeding modules**


XN-P3...-SBB for XN-PF-24VDC-D

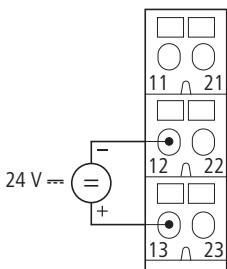


XN-P4...-SBBC for XN-PF-24VDC-D

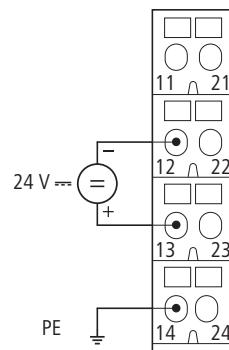

XN-P3...-SBB for XN-PF-120/230VAC-D

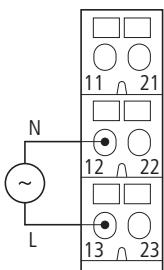


XN-P4...-SBB for XN-PF-120/230VAC-D

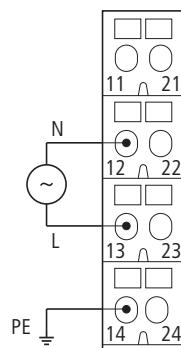


Digital input modules


XN-S3...-SBB for XN-2DI-24VDC-P

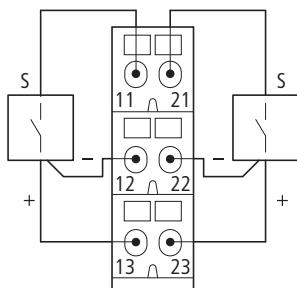


XN-S4...-SBBC for XN-2DI-24VDC-P

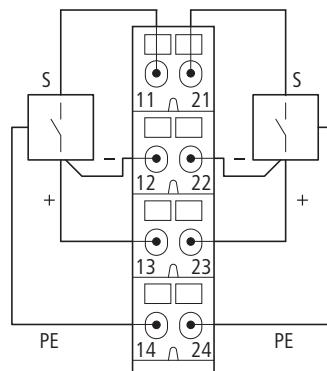


XN-S3...-SBB for XN-2DI-24VDC-N

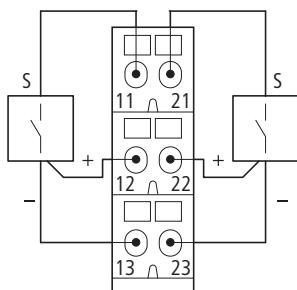


XN-S4...-SBBC for XN-2DI-24VDC-N

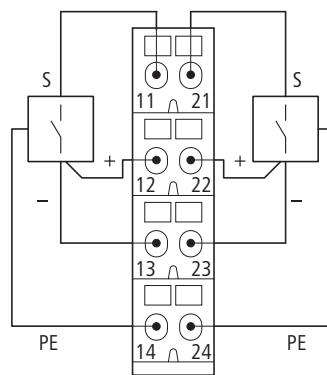

XN-S3...-SBB for XN-2DI-120/230VAC

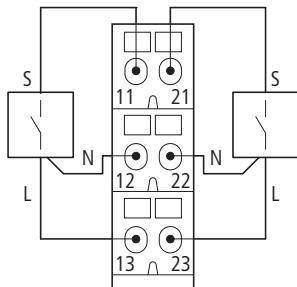


XN-S4...-SBBC for XN-2DI-120/230VAC

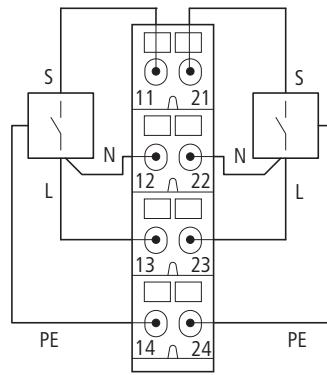


Digital input modules


XN-S4...-SBBS for XN-4DI-24VDC-P

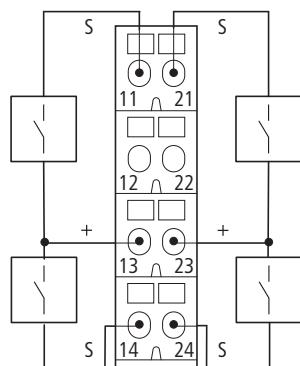


XN-S6...-SBBSSBB for XN-4DI-24VDC-P

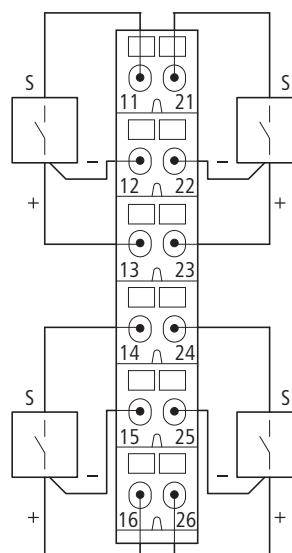


XN-S4...-SBBS for XN-4DI-24VDC-N

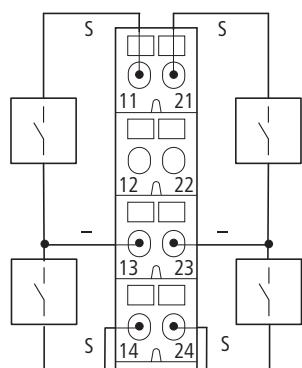


XN-S6...-SBBSSBB for XN-4DI-24VDC-N

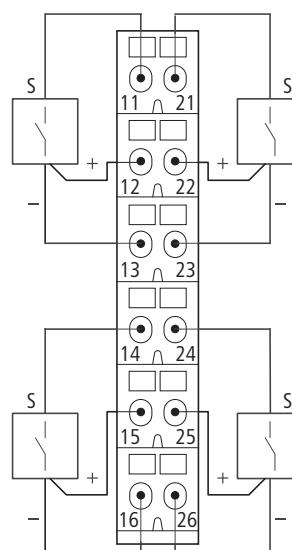

XN-B3...-SBB for XN-16DI-24VDC-P

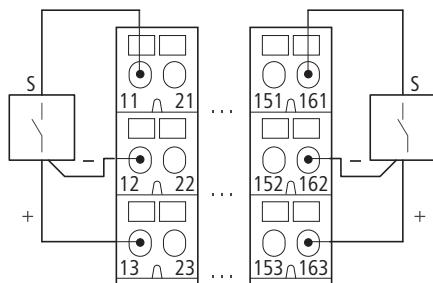


XN-B4...-SBBC for XN-16DI-24VDC-P

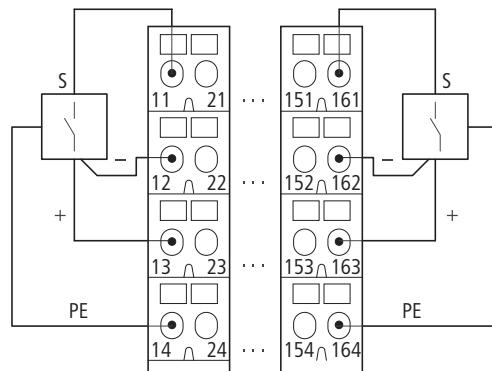


Digital input modules


XN-B6...-SBBB for XN-32DI-24VDC-P

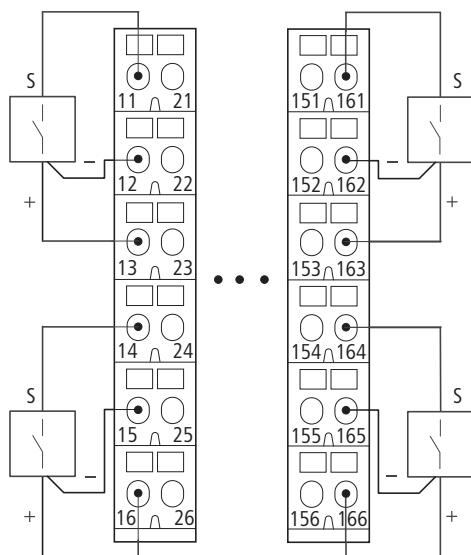

XNE-8DI-24VDC-P

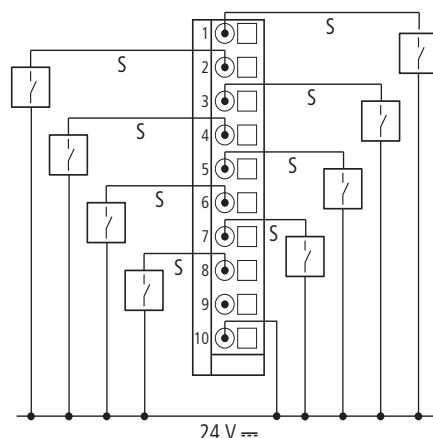


XNE-16DI-24VDC-P

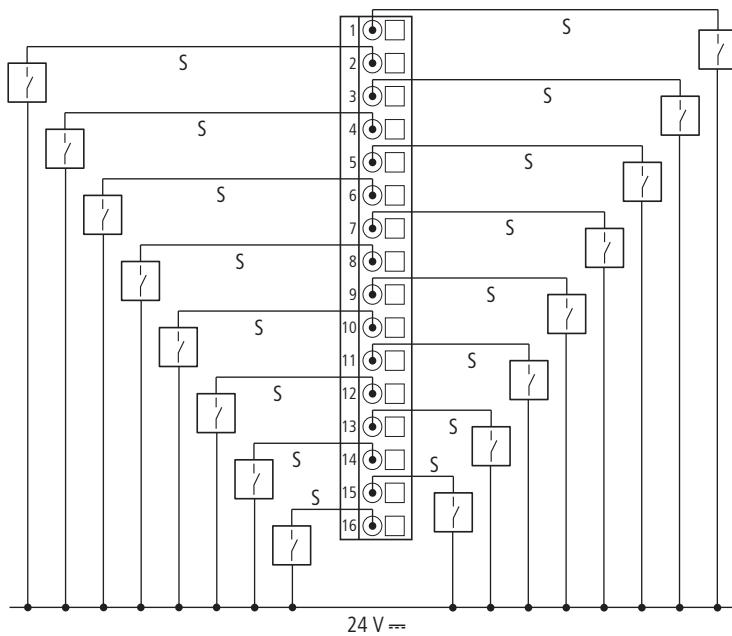


Digital output modules


XN-S3...-SBC for
XN-2DO-24VDC-0.5A-P
XN-2DO-24VDC-2A-P

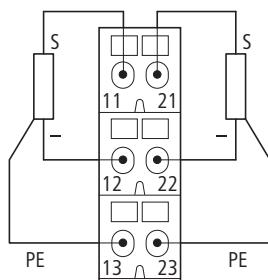


XN-S3...-SBC for XN-2DO-24VDC-0.5A-N

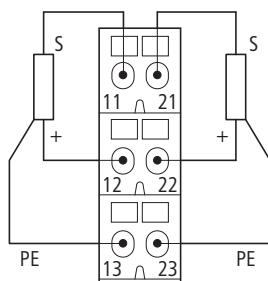


XN-S3...-SBC for XN-2DO-120/230VAC-0.5A

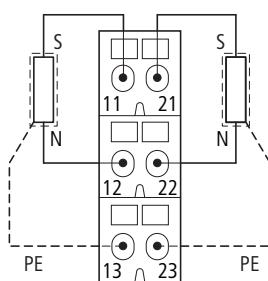


XN-S4...-SBC for XN-4DO-24VDC-0.5A-P

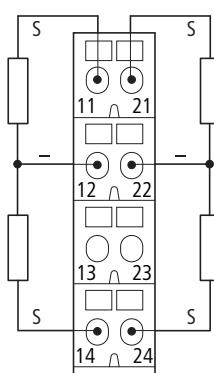


XN-S4...-SBCS for
XN-2DO-24VDC-0.5A-P
XN-2DO-24VDC-2A-P

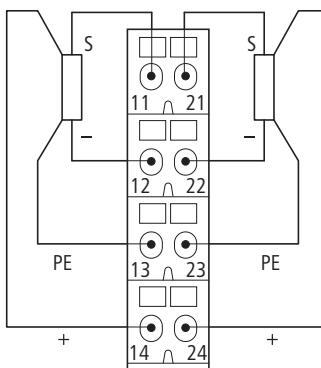


XN-S4...-SBCS for XN-2DO-24VDC-0.5A-N

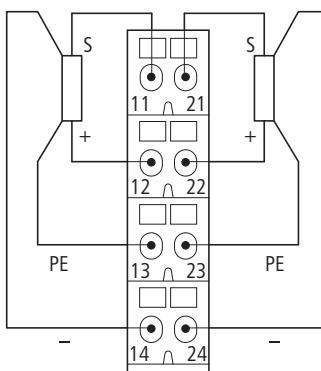

XN-S4...-SBCS for XN-2DO-120/230VAC-0.5A

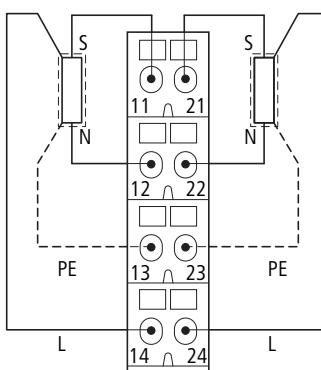


XN-B3...-SBC for XN-16DO-24VDC-0.5A-P

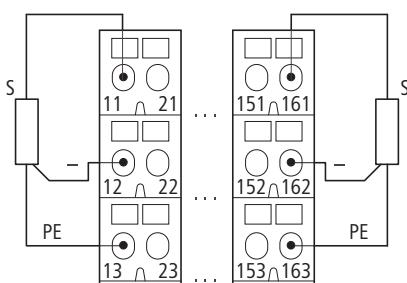


Digital output modules


XN-S6...-SBCSBC for XN-4DO-24VDC-0.5A-P

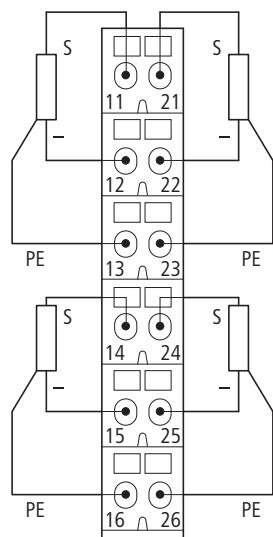


XNE-8DO-24VDC-0.5A-P

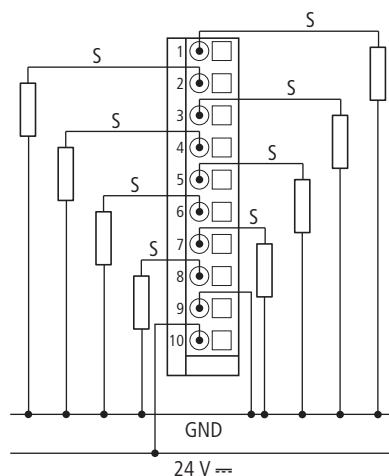

XN-B6...-SBCSBC for XN-32DO-24VDC-0.5A-P

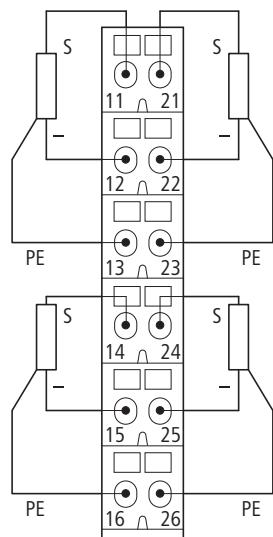


XNE-16DO-24VDC-0.5A-P

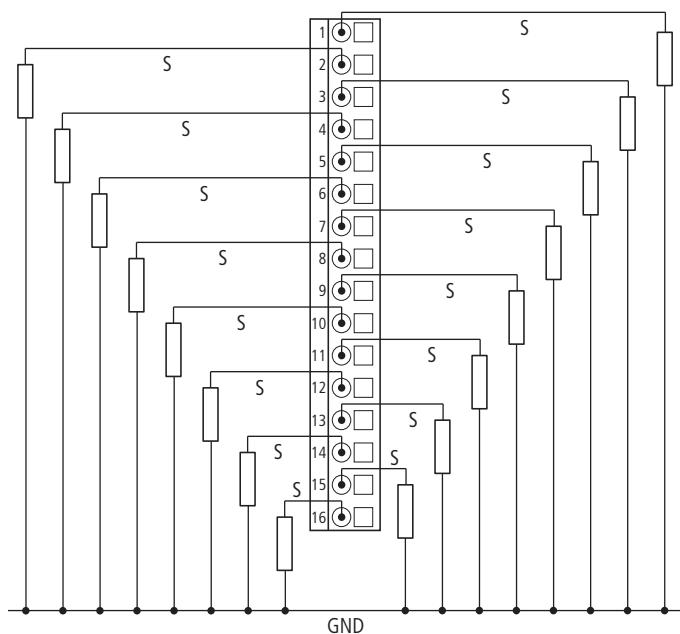


Analog input modules


XN-S3...-SBB for XN-1AI-I(0/4...20MA)
 XN-S3...-SBB for XN-1AI-U(-10/0...+10VDC)
 Analog sensor/transmitter, without transmitter supply

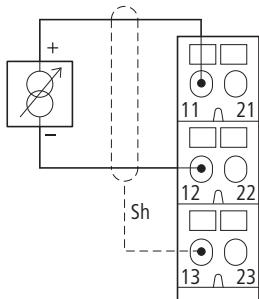


XN-S3...-SBB for XN-2AI-I(0/4...20MA), XN-2AI-U(-10/0...+10VDC)
 Analog sensor/transmitter, without transmitter supply

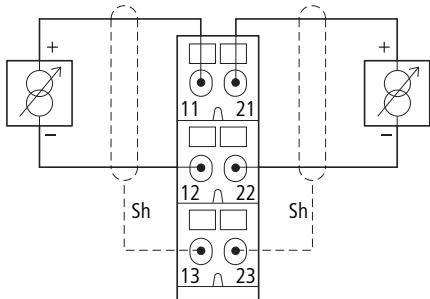


XN-S4...-SBBS for XN-2AI-I(0/4...20MA)
 Two-conductor connection without external transmitter supply

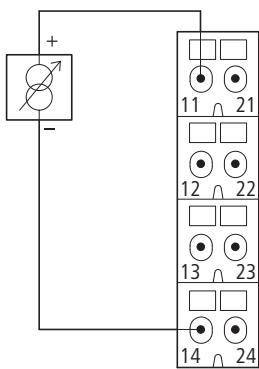

XN-S4...-SBBS for XN-1AI-I(0/4...20MA)
 XN-S4...-SBBS for XN-1AI-U(-10/0...+10VDC)
 Analog transmitter with non-isolated transmitter supply

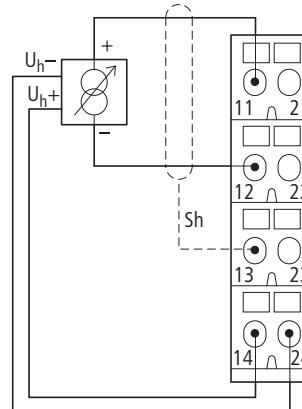


XN-S4...-SBBS for XN-2AI-I(0/4...20MA), XN-2AI-U(-10/0...+10VDC),
 Analog transmitter with non-isolated transmitter supply

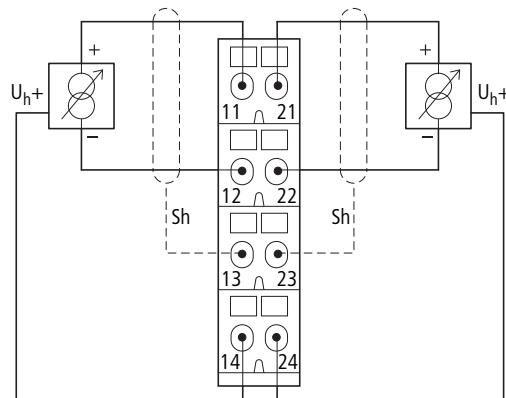


Analog input modules


XN-S6...-SBCSBC for XN-4AI-U/I
Analog sensor/transmitter, without transmitter supply

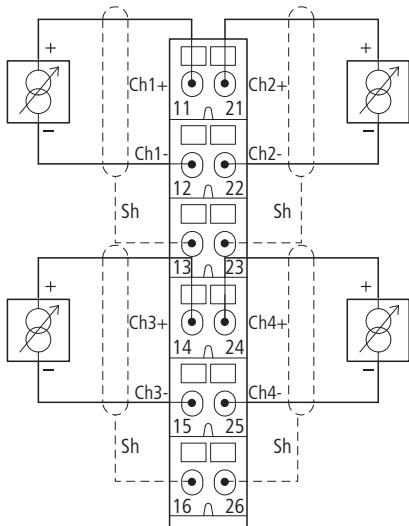


XN-S3...-SBB for XN-2AI-Pt/Ni-2/3
2-conductor connection

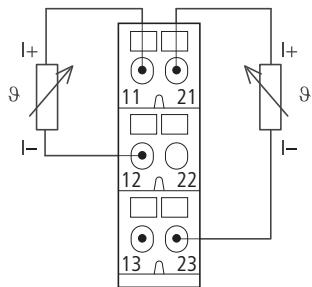


XN-S3...-SSB for XN-AI-U/I
2-conductor connection without external transmitter supply

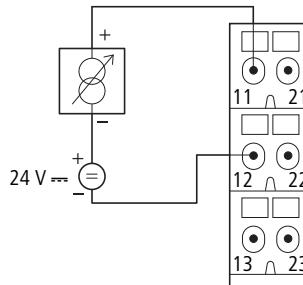

XN-S4...-SBBS for XN-2AI-Pt/Ni-2/3
3-conductor connection

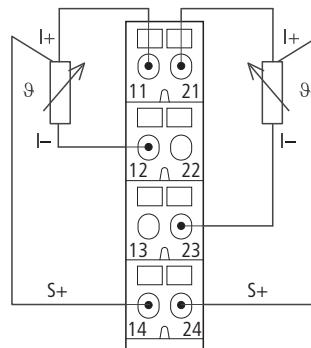


XN-S4...-SBBS-CJ for XN-2AI-THERMO-PI

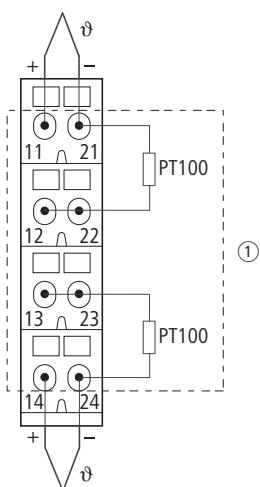


① Cold-junction compensation in base module

XNE-8AI-U/I-4Pt/Ni

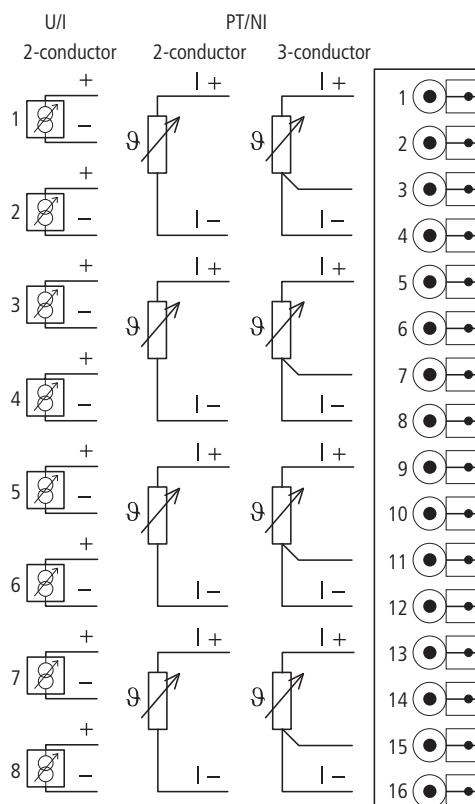


Analog output modules


XN-S3...-SSB for XN-1AO-I(0/4...20MA)

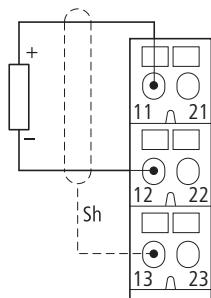


XN-S3...-SSB for XN-2AO-I(0/4...20MA)

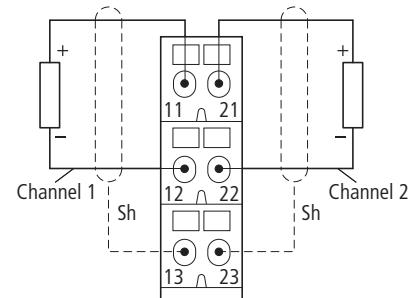

XN-S3...-SSB for XN-2AO-U(-10/0...+10VDC)

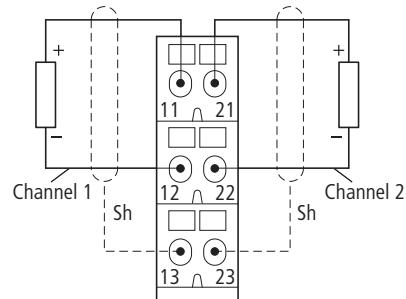


XNE-4AO-U/I

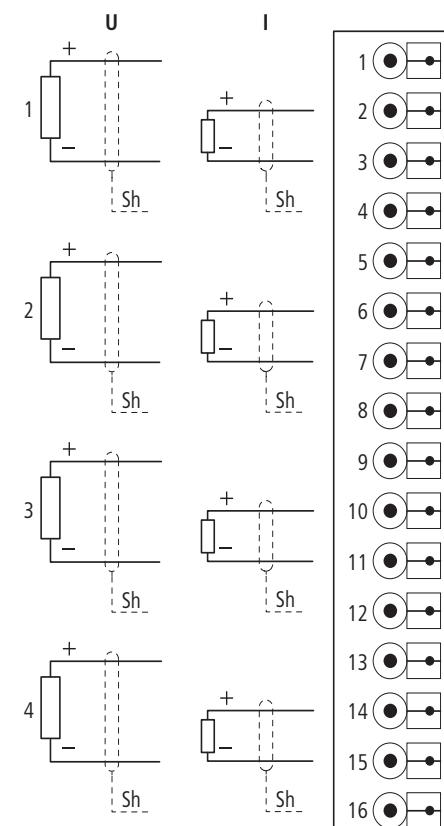


Relay modules

XN-S4x...-SBBS with externally applied supply and common potential link for XN-2DO-R-NC

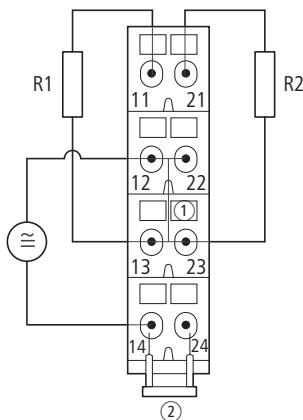


Module circuit XN-S4x...-SBBS for XN-2DO-R-NC

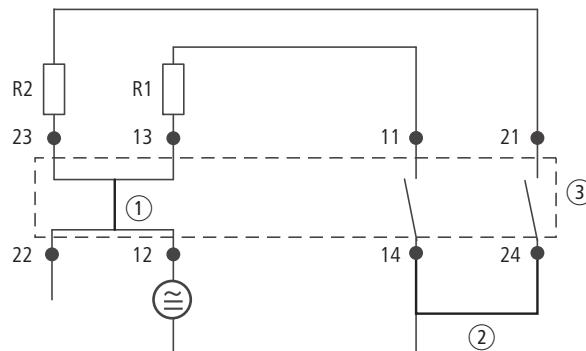


- (1) Linked in the electronics
- (2) Cross-link via QVR in the base module
- (3) Electronics module

XN-S4x...-SBCS supply via C-rail and common potential link for XN-2DO-R-NC

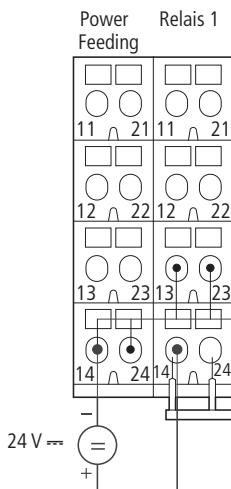


- (1) Supply via C-rail
- (2) Max. 8 relay modules

Module circuit XN-S4x...-SBCS for XN-2DO-R-NC

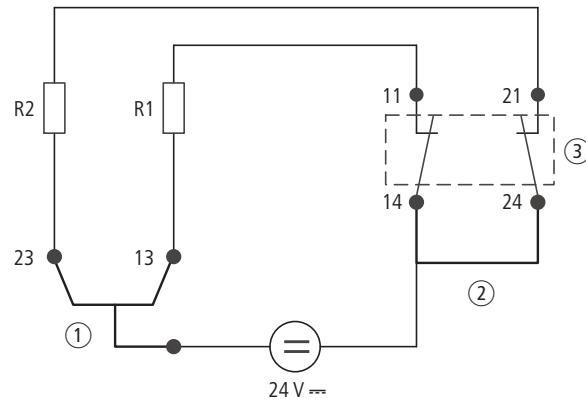


- (1) Linked in the electronics
- (2) Cross-link via QVR in the base module
- (3) Electronics module

XN-S4x...-SBBS with externally applied supply and common potential link for XN-2DO-R-NO

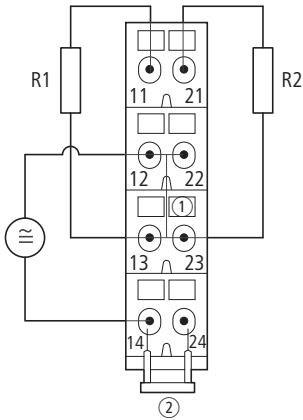


Module circuit XN-S4x...-SBBS for XN-2DO-R-NO

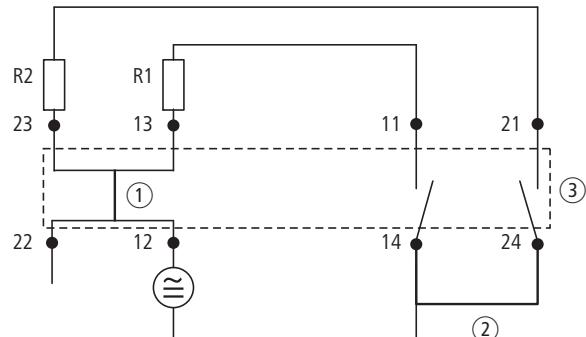

- (1) Linked in the electronics
- (2) Cross-link via QVR in the base module
- (3) Electronics module


Relay modules

XN-S4x...-SBCS supply via C-rail and common potential link for XN-2DO-R-NO

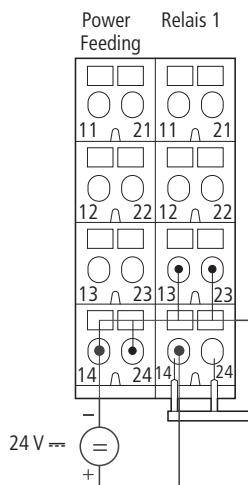


- ① Supply via C-rail
- ② Max. 8 relay modules

Module circuit XN-S4x...-SBCS for XN-2DO-R-NO

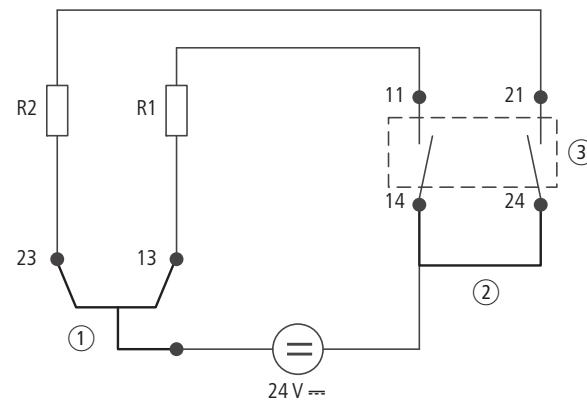


- ① Top-hat rail
- ② Cross-link via QVR in the base module
- ③ Electronics module

XN-S4x...-SBBS for XN-2DO-R-CO

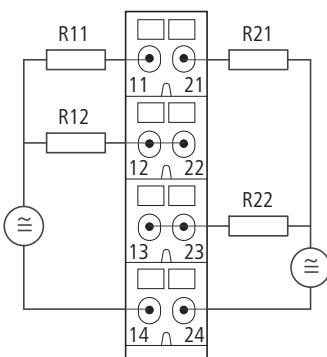


Module circuit XN-S4x...-SBBS for XN-2DO-R-CO

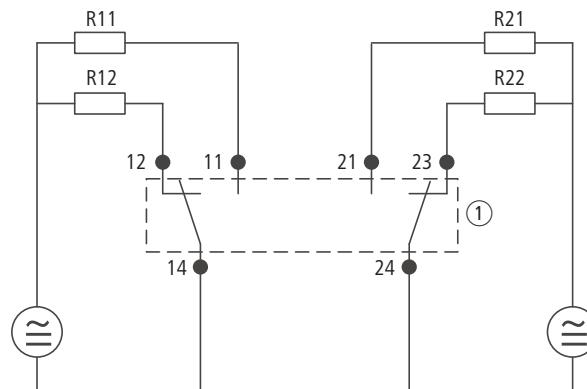

- ① Electronics module


Definition

At 1000 operations, no arc with a duration > 10 ms must occur.

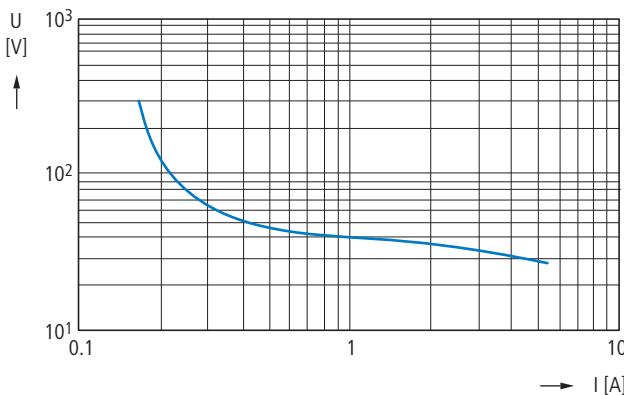
Load limit curve

Serial interfaces


XN-S4x...-SBBS for XN-1RS232 and D-Sub plug

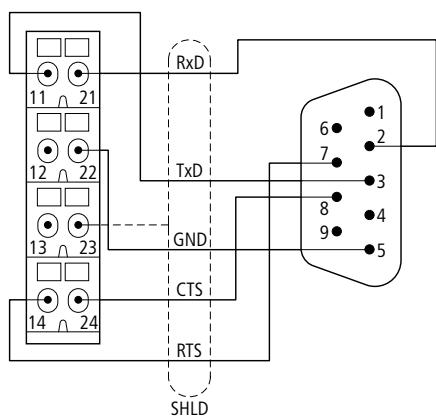


XN-S4x...-SBBS for XN-1RS485/422 in RS422 mode

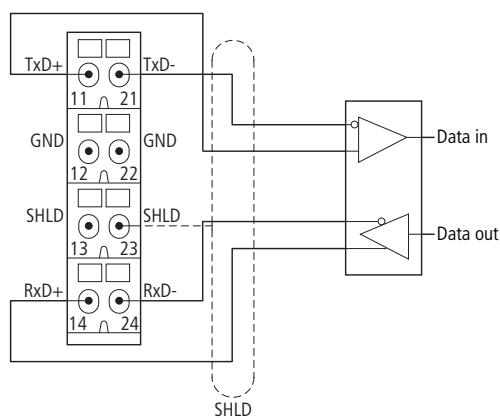

XN-S4x...-SBBS for XN-1SSI on an SSI rotary encoder

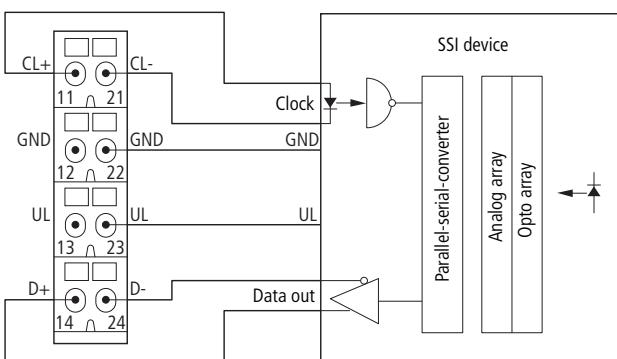


XN-S4...-SBBS for XN-1RS485/422 in RS485 mode

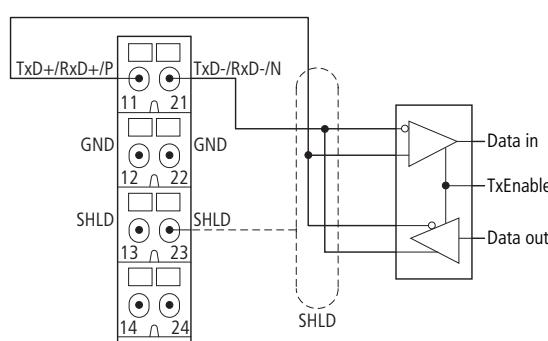


Technology modules / counter


XN-S4...-SBBS for XN-1CNT-24VDC

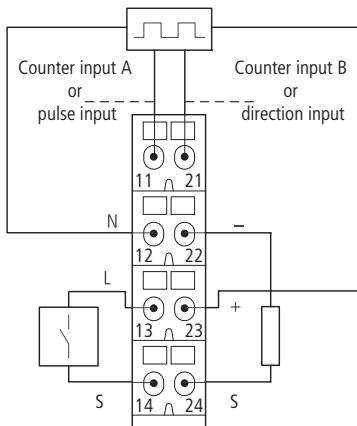

XNE-1SWIRE

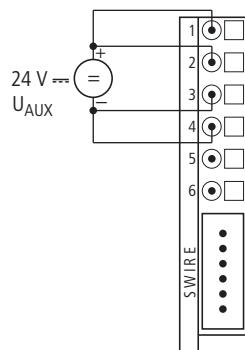

XNE-2CNT-2PWM

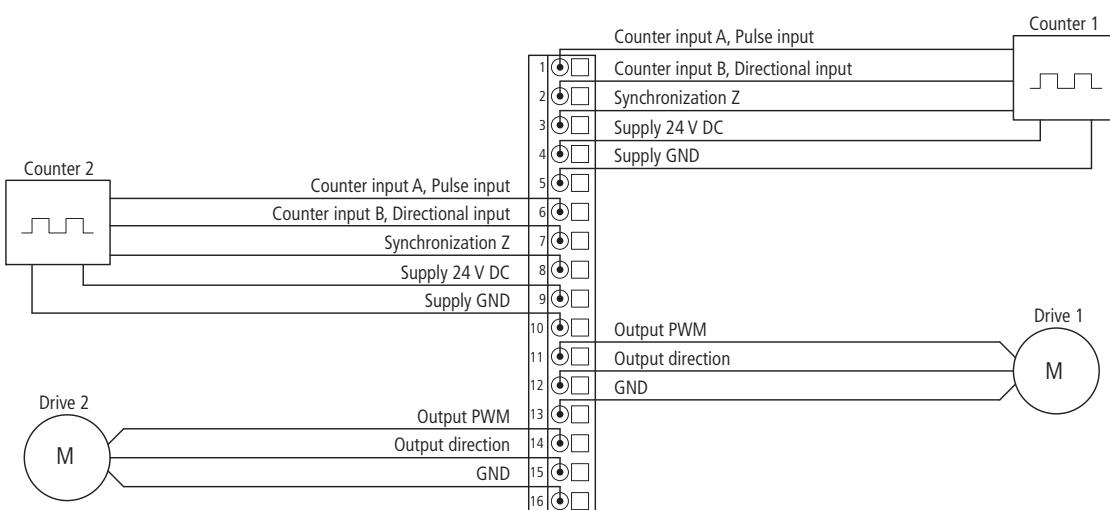

Technical data

General	
Standards	EN 61000-6-2, EN 61000-6-4, EN 61131-2
Supported fieldbus systems	PROFIBUS-DP, CANopen, DeviceNet, Ethernet (depending on gateway)
Potential isolation	Yes, through optocoupler
Ambient temperature	°C
Ambient temperature, storage	°C
Relative humidity	%
Harmful gases	
SO ₂	ppm
H ₂ S	ppm
Vibration resistance, operating conditions	10 (rel. humidity < 75%, non-condensing)
Mechanical shock resistance	According to IEC 60068-2-6
Repetitive shock resistance	According to IEC 60068-2-27
Drop and free fall	According to IEC 60068-2-29
Drop and free fall	According to IEC 60068-2-31, free fall to IEC 60068-2-32
Protection type	IP20
Electromagnetic compatibility (EMC)	
ESD	EN 61000-4-2
Electromagnetic fields	EN 61000-4-3
Burst	EN 61000-4-4
Surge	EN 61000-4-5
HF, asymmetric	EN 61000-4-6
Radiated interference (RFI)	EN 55016-2-3
Voltage fluctuations	EN 61131-2
Type test	To EN 61131-2
Approvals	CE, cUL (may be in preparation)

	Gateways XN, basic modules	Gateways XNE, electronics modules XNE
Terminals		
Dimensional data	To VDE 0611 Part 1/8.92 / IEC/EN 60947-7-1	To VDE 0611 Part 1/8.92 / IEC/EN 60947-7-1
Connection from above	Spring-loaded/screw terminals	Push-in spring-cage terminals
Cable stripped length	mm	8
Max. terminal capacity	mm ²	0.5 - 2.5
Connectable conductors		
"e" solid H07V-U	mm ²	0.5 - 2.5
"t" flexible H 07V-K	mm ²	0.5 - 1.5
"t" with ferrule without plastic collar to DIN 46228-1 (ferrules gas-tight)	mm ²	0.5 - 1.5
"t" with ferrule with plastic collar to DIN 46228-1 (ferrules gas-tight)	mm ²	0.5 - 0.75
Gage pin IEC/EN 60947-1		A1



	XNE-GWBR-PBDP	XNE-GWBR-CANOPEN	XNE-GWBR-2ETH-IP
Gateways XNE			
Fieldbus		PROFIBUS-DP	CANopen
Protocol		PROFIBUS-DPV0 and PROFIBUS-DPV1	CANopen
Maximum number of stations		48 modules (XN, XNE) of slice design or max. length of station: 1 m	62 modules (XN, XNE) of slice design or max. length of station: 1 m
System supply	U _{SYS}	V DC	24 V DC/5 V DC
Permissible range, 5 V DC	U _{SYS}	V DC	4.7 - 5.3
Permissible range, 24 V DC	U _{SYS}	V DC	18 - 30
Field voltage	U _L	V DC	24
Permissible range	U _L	V DC	18 - 30
Ripple		%	< 5 (to EN 61131-2)
Servicing interface			PS/2 socket
Fieldbus terminals			Push-in spring-cage terminals
Transfer rate		kBit/s	9.6 - 12000
Data transfer rate setting			Automatic
Address assignment			Through DIP switch
Fieldbus termination			Through DIP switch
Number of parameter bytes			2
Number of diagnosis bytes			2
Address range			1 - 125 decimal
			1 - 63 decimal
			1 - 254 decimal

	XN-GWBR-PBDP	XN-GWBR-CANOPEN	XN-GWBR-DNET	XN-GWBR-MODBUS-TCP	XN-PLC-CANOPEN
Gateways XN with built-in supply module					
Fieldbus		PROFIBUS-DP	CANopen	DeviceNet	Ethernet
Protocol		PROFIBUS-DPV0	CANopen	DeviceNet	Modbus-TCP
Maximum number of stations		74 modules (XN, XNE) of slice design or max. length of station: 1 m	74 modules (XN, XNE) of slice design or max. length of station: 1 m	74 modules (XN, XNE) of slice design or max. length of station: 1 m	74 modules (XN, XNE with limitations) of slice design or max. length of station: 1 m
System supply	U _{SYS}	V DC	24 V DC/5 V DC	24 V DC/5 V DC	24 V DC/5 V DC
Permissible range, 5 V DC	U _{SYS}	V DC	4.7 - 5.3	4.7 - 5.3	4.7 - 5.3
Permissible range, 24 V DC	U _{SYS}	V DC	18 - 30	18 - 30	18 - 30
Field voltage	U _L	V DC	24	24	24
Permissible range	U _L	V DC	18 - 30	18 - 30	18 - 30
Ripple		%	< 5 (to EN 61131-2)		
Servicing interface			PS/2 socket	PS/2 socket	PS/2 socket
Fieldbus terminals			1x D-sub 9-pin socket	Open style connector	RJ45 bus
Transfer rate		kBit/s	9.6 - 12000	10, 20, 50, 125, 250, 500, 800, 1000	125, 250, 500
Data transfer rate setting				10000, 100000	10, 20, 50, 125, 250, 500, 800, 1000
Address assignment			2 decimal rotary coding switches	Through DIP switch	Automatic
Fieldbus termination			External	External	Decimal rotary coding switch, BootP, DHCP or I/Oassistant
Number of parameter bytes			5		
Number of diagnosis bytes			3		
Address range			1 - 99 decimal	1 - 99 decimal	1 - 63 decimal
Program data		kByte	-	-	1 - 254 decimal
Program code		kByte	-	-	128
Cycle time for 1 k of instructions (bits, bytes)		ms	-	-	128
Real-time clock			-	-	0.5
			-	-	Yes



	XN-GW-PBDP-1.5MB	XN-GW-PBDP-12MB	XN-GW-CANOPEN	XN-GW-DNET
XN gateways without built-in supply module				
Fieldbus	PROFIBUS-DP	PROFIBUS-DP	CANopen	DeviceNet
Protocol	PROFIBUS-DPv0	PROFIBUS-DPv0	CANopen	DeviceNet
Maximum number of stations	74 modules (XN) of slice design or max. length of station: 1 m	74 modules (XN) of slice design or max. length of station: 1 m	74 modules (XN) of slice design or max. length of station: 1 m	74 modules (XN) of slice design or max. length of station: 1 m
Operating voltage	V DC	5 (from bus refreshing module)	5 (from bus refreshing module)	5 (from bus refreshing module)
Permissible range	V DC	4.7 - 5.3	4.7 - 5.3	4.7 - 5.3
Ripple	%	< 5 (to EN 61131-2)	< 5 (to EN 61131-2)	< 5 (to EN 61131-2)
Rated current drawn from module bus	I _{MB}	mA	≤ 430	≤ 350
Servicing interface		PS/2 socket	PS/2 socket	PS/2 socket
Fieldbus terminals		2 x D-sub 9-pin sockets; 2 x spring-loaded terminal strips for direct wiring	1x D-sub 9-pin socket	1x D-sub 9-pin socket; 1x D-sub 9-pin plug; 2 x spring-loaded terminal strips for direct wiring, 5-pin
Transfer rate	kBit/s	9.6 - 1500	9.6 - 12000	10, 20, 50, 125, 250, 500, 800, 1000
Data transfer rate setting		-	-	Through DIP switch
Address assignment		Through two hex rotary coding switches	Through two hex rotary coding switches	Through two decimal rotary coding switches
Fieldbus termination		Through D-sub plug	Through D-sub plug	Through D-sub plug
Number of parameter bytes		5	5	-
Number of diagnosis bytes		3	3	-
Address range		1 - 125 decimal	1 - 127 decimal	0 - 63 decimal

	XN-BR-24VDC-D	XN-PF-24VDC-D	XN-PF-120/230VAC-D
Supply modules			
Operating voltage		24 V DC	24 V DC
System supply	U _{SYS}	V DC	24
Permissible range, 24 V DC	U _{SYS}	V DC	18 - 30 ¹⁾
Permissible range, 5 V DC	U _{MB} (built into system)	V DC	4.7 - 5.3
Field voltage	U _L	24 V DC	24 V DC
Permissible range	U _L	18 - 30 V DC	18 - 30 V DC ²⁾
Rated current drawn from module bus	I _{MB}	mA	-
Insulation test	U _I	V AC	500
Ripple		%	< 5 (to EN 61131-2)
Maximum operating current	I _L	A	10
Maximum system supply current	I _{MB}	A	1.5
Number of diagnostic bits		4	4
Base module without gateway power supply			
Without C connection		XN-P3...-SBB XN-P3...-SBB-B	XN-P3...-SBB
With C connection		XN-P4...-SBBC XN-P4...-SBBC-B	XN-P4...-SBBC

Notes

- ¹⁾ Permissible range for system supply:
for U_{SYS} = 24 V DC: 18 to 30 V DC (to EN 61131-2)
- ²⁾ Permissible range for field voltage U_L: to EN 61131-2 (18 to 30 V DC)
- ³⁾ Permissible range for rated voltage and field voltage U_L: to EN 61131-2



Remote I/O XI/ON

	XN-2DI-24VDC-P	XN-2DI-24VDC-N	XN-2DI-120/230VAC
Digital input modules			
Channels	Number	2	2
Rated voltage at supply terminal	U _L	24 V DC	24 V DC
Rated current drawn from supply terminal ^{1), 2)}	I _L	≤ 20 mA	≤ 20 mA
Rated current drawn from module bus ²⁾	I _{MB}	≤ 28 mA	≤ 28 mA
Insulation test	U _i	500 V AC	500 V AC
Heat dissipation	W	0.7	0.7
Input voltage			
Input voltage, rated value		24 V DC	24 V DC
Low level		-30 V - +5 V	30 V - (U _L - 11 V)
High level		11 - 30 V	0 - 5 V
Frequency range	Hz	-	48 - 63
Input current			
Low level/active level		0 mA - 1.5 mA	0 mA - 1.7 mA
High level/active level		2 mA - 10 mA	1.8 mA - 10 mA
Input delay			
t _{rising edge}	μs	< 200	< 200
t _{falling edge}	μs	< 200	< 200
Basic modules			
Without C connection		XN-S3...-SBB 2-conductor proximity switches (Bero®) can be connected, with a permissible quiescent current of up 1.5 mA.	XN-S3...-SBB 2-conductor proximity switches (Bero®) can be connected, with a permissible quiescent current of up 1.5 mA.
With C connection		XN-S4...-SBBC	XN-S4...-SBBC

¹⁾ The supply terminal (U_L) provides power for the module electronics and for the sensors at the inputs. The total current required for each module consists of the sum of all partial currents.

²⁾ Part of the XI/ON module's electronics is supplied with module bus voltage (5 V DC), the other part through the supply terminal (U_L).

³⁾ Max. permissible capacity: 141 nF at 79 V AC/50 Hz; 23 nF at 265 V AC/50 Hz

Remote I/O XI/ON

XN-4DI-24VDC-P	XN-4DI-24VDC-N	XN-16DI-24VDC-P	XN-32DI-24VDC-P	XNE-8DI-24VDC-P	XNE-16DI-24VDC-P
4	4	16	32	8	16
24 V DC	24 V DC	24 V DC	24 V DC	24 V DC	24 V DC
≤ 40	≤ 40	≤ 40	≤ 30	≤ 1.5	≤ 3
≤ 29	≤ 28	≤ 45	≤ 30	≤ 15	≤ 15
500	500	500	500	500	500
1	1	2.5	4.2	< 1.5	< 2.5
24 V DC	24 V DC	24 V DC	24 V DC	24 V DC	24 V DC
-30 V - +5 V	30 V - (U _L - 11 V)	-30 V - +5 V	-30 V - +5 V	-U _L - +5 V	-U _L - +5 V
15 V - 30 V	0 - 5 V	15 V - 30 V	15 V - 30 V	11 V - U _L	11 V - U _L
0 mA - 1.5 mA	0 mA - 1.2 mA	0 mA - 1.5 mA	0 mA - 1.5 mA	-1 mA - 1.5 mA	-1 mA - 1.5 mA
2 mA - 10 mA	1.3 mA - 6 mA	2 mA - 10 mA	2 mA - 10 mA	2 mA - 5 mA	2 mA - 5 mA
< 200	< 200	< 200	< 200	< 100	< 150
< 200	< 200	< 200	< 200	< 200	< 300
XN-S4...-SBBS XN-S6...-SBBSSBB	XN-S4...-SBBS XN-S6...-SBBSSBB	XN-B3...-SBB	XN-B6...-SBBSSBB	Already built in	Already built in
		XN-B4...-SBBC			

Remote I/O XI/ON

	XN-2DO-24VDC-0.5A-P	XN-2DO-24VDC-0.5A-N	XN-2DO-120/230VAC-0.5A
Digital output modules			
Channels	Number	2	2
Rated voltage at supply terminal	U_L	24 V DC	24 V DC
Rated current drawn from supply terminal (for 0 mA load current) ¹⁾	I_L	mA	≤ 20
Rated current drawn from module bus ²⁾	I_{MB}	mA	≤ 32
Insulation test	U_i	V AC	500
Heat dissipation	W	Normally 1	Normally 1
Output voltage			
High level		$> U_L - 1 \text{ V DC}$	$< GND_L + 1 \text{ V DC}$
			$> U_L - 2 \text{ V AC, (zero-point switching triac)}$
Output current	A		
High level (rated)	A	0.5	0.5 ³⁾
High level (permissible range)	A	< 0.6	0.02 - 0.5
Low level	mA		< 1.5
Back-up fuse			500 mA FF
Surge current	I_s	A	8 (1 period at 60 Hz)
Number of parallel-switchable outputs	max.		
Total module current	A	1	1
Delay for signal changeover, resistive load			
From Low to High level	μs	< 100	$< T/2 + 1 \text{ ms}$
From High to Low level	μs	< 100	$< T/2 + 1 \text{ ms}$
Load resistance range		$> 48 \Omega$	At 120 V AC: 240 Ω - 6 k Ω At 230 V AC: 460 Ω - 11.5 k Ω
Utilization factor	%	g	100
The following can be connected:			100 (observe derating)
		Resistive loads	Resistive loads
		Inductive loads	Inductive loads
		Lamp loads	Lamp loads
Resistive load	Ω	> 48	> 48
Inductive load	H	< 1.2	< 1.2
Lamp load	R_{LL}	W	< 3
			< 12
Switching frequency			
For resistive load	f	Hz	$< 5000 (R_{LO} < 1 \text{ k}\Omega)$
For inductive load		Hz	< 2
			< 2
For lamps		Hz	< 10
Number of diagnostic bits		2	2
Diagnostics		Yes	Yes
Outputs to EN 61131-1		Protected	Protected
Retriggering after elimination of short circuit	I_i	Self-acting	Self-acting
Basic modules			
With C connection		XN-S3...-SBC XN-S4...-SBCS	XN-S3...-SBC XN-S4...-SBCS
		XN-S3...-SBC XN-S4...-SBCS	XN-S3...-SBC XN-S4...-SBCS

Notes

- ¹⁾ The supply terminal (U_L) provides power for the module electronics and for the consumers at the outputs. The total current required for each module consists of the sum of all partial currents.
- ²⁾ Part of the XI/ON module's electronics is supplied with module bus voltage (5 V DC), the other part through the supply terminal (U_L).
- ³⁾ To increase the maximum output current to up to 1 A, two outputs can be connected in parallel.

Remote I/O XI/ON

XN-2DO-24VDC-2A-P	XN-4DO-24VDC-0.5A-P	XN-16DO-24VDC-0.5A-P	XN-32DO-24VDC-0.5A-P	XNE-8DO-24VDC-0.5A-P	XNE-16DO-24VDC-0.5A-P
2	4	16	32	8	16
24 V DC	24 V DC	24 V DC	24 V DC	24 V DC	24 V DC
≤ 50	≤ 25	≤ 30	≤ 50	$\leq 3 \text{ mA (all outputs OFF)}$	$\leq 3 \text{ mA (all outputs OFF)}$
≤ 33	≤ 30	≤ 120	≤ 30	$\leq 15 \text{ mA}$	$\leq 25 \text{ mA}$
500	500	500	500	500	500
Normally 1	Normally 1	Normally 4	Normally 5	Normally 1.5	Normally 2.5
$> U_L - 1 \text{ V DC}$	$> U_L - 1 \text{ V DC}$	$> U_L - 1 \text{ V DC}$	$> U_L - 1 \text{ V DC}$	$> U_L - 1 \text{ V DC}$	$> U_L - 1 \text{ V DC}$
2	0.5	0.5	0.5	0.5 ³⁾	0.5 ³⁾
< 2.4	< 0.6	< 0.6	< 1.0	< 1.0	< 1.0
4	2	8	10		
< 100	< 250	< 100	< 300	< 300	< 300
< 100	< 250	< 100	< 300	< 300	< 300
$< 12 \Omega$	$> 48 \Omega$	$> 48 \Omega$	$> 48 \Omega$		
100	100	100	See total module current	100	50%, max. 4 A
Resistive loads	Resistive loads	Resistive loads	Resistive loads	Resistive loads	Resistive loads
Inductive loads	Inductive loads	Inductive loads	Inductive loads	Inductive loads	Inductive loads
Lamp loads	Lamp loads	Lamp loads	Lamp loads	Lamp loads	Lamp loads
> 12	> 48	> 48	> 48	> 48	> 48
< 1.2	< 1.2	< 1.2	< 1.2	As for DC13 to IEC 60947-5-1	As for DC13 to IEC 60947-5-1
< 6	< 6	< 3	< 6	< 6	< 6
$< 5000 (R_{LO} < 1 \text{ k}\Omega)$	$< 1000 (R_{LO} < 1 \text{ k}\Omega)$	$< 100 (R_{LO} < 1 \text{ k}\Omega)$	$< 100 (R_{LO} < 1 \text{ k}\Omega)$	< 100	< 100
< 2	< 2			As for DC13 to IEC 60947-5-1	As for DC13 to IEC 60947-5-1
< 10	< 10			< 10	< 10
2	1	4	8		
Yes	Yes	Yes	Yes		
Protected	Short-circuit proof	Short-circuit proof	Short-circuit proof	Short-circuit proof	Short-circuit proof
Self-acting	Self-acting	Self-acting	Self-acting	Self-acting	Self-acting
XN-S3...-SBC XN-S4...-SBCS	XN-S3...-SBCS XN-S4...-SBCS	XN-B3...-SBC	XN-B6...-SBCSBC	Already built in	Already built in

Remote I/O XI/ON

Notes

¹⁾ The supply terminal (U_L) provides power for the module electronics and for the analog transmitters at the inputs. The total current required for each module consists of the sum of all partial currents.

²⁾ Part of the XI/ON module's electronics is supplied with module bus voltage (5 V DC), the other part through the supply terminal (U_L).

	XN-1AI-I(0/4...20MA)	XN-2AI-I(0/4...20MA)	XN-1AI-U(-10/0...+10VDC)
Analog input modules			
Measured variables	Current	Current	Voltage
Channels	Number	1	2
Rated voltage at supply terminal	U_L	24 V DC	24 V DC
Rated current drawn from supply terminal ^{1), 2)}	I_L	≤ 50 mA	≤ 12 mA
Rated current drawn from module bus ²⁾	I_{MB}	mA	≤ 41 mA
Heat dissipation	W	< 1	< 1
Sensor/transmitter supply		Bridged with U_L and GND _L of incoming unit; not protected	Bridged with U_L and GND _L of incoming unit; not protected
Voltage measurement			
Measurement ranges	-	-	-10 - 10 V DC/0 - 10 V DC
Value representation	-	-	Standard, 16 bit/12 bit left-aligned
The following can be connected:		-	2/3-/4-conductor + shield
Maximum input voltage	$U_{max.}$	V DC	-
Input resistance	R_L	kΩ	-
Limiting frequency	f_G	Hz	-
Basic error limit at 23 °C	%	-	< 0.2
Temperature coefficient		-	≤ 300 ppm/°C of full-scale value
Current measurement			
Measurement ranges	mA	0 - 20 mA/4 - 20 mA	0 - 20 mA/4 - 20 mA
Value representation		Standard, 16 bit/12 bit left-aligned	Standard, 16 bit/12 bit left-aligned
The following can be connected:		2/3-/4-conductor + shield	2/3-conductor + shield
Maximum input current	$I_{max.}$	mA	50
Input resistance	R_L	Ω	< 125 Ω
Limiting frequency	f_G	Hz	200
Basic error limit at 23 °C	%	< 0.2	< 0.2
Temperature coefficient		-	≤ 300 ppm/°C of full-scale value
Temperature measurement			
Connectable sensors		-	-
Measurement ranges	-	-	-
Value representation	-	-	-
The following can be connected:	-	-	-
Measuring current	$I_{mess.}$	-	-
Destruction limit	$U_{max.}$	V DC	-
Basic error limit at 23 °C	%	-	-
Temperature coefficient		-	-
R (resistance measurement)			
Measurement ranges	-	-	-
Value representation	-	-	-
The following can be connected:	-	-	-
Destruction limit	$U_{max.}$	V DC	-
Limiting frequency	f_G	Hz	-
Basic error limit at 23 °C	%	-	-
Temperature coefficient		-	-
Basic modules			
Without C connection	XN-S3...-SBB	XN-S3...-SBB	XN-S3...-SBB
Without C connection, for sensor supply	XN-S4...-SBBS	XN-S4...-SBBS	XN-S4...-SBBS

Remote I/O XI/ON

Notes

¹⁾ The supply terminal (U_L) provides power for the module electronics and for the analog transmitters at the inputs. The total current required for each module consists of the sum of all partial currents.

²⁾ Part of the XI/ON module's electronics is supplied with module bus voltage (5 V DC), the other part through the supply terminal (U_L).

XN-2AI-U(-10/0...+10VDC)	XN-4AI-U/I	XN-2AI-THERMO-PI	XN-2AI-Pt/Ni-2/3	XNE-8AI-U/I-4Pt/Ni
Voltage	Voltage, current	Temperature (thermo-couples)	Temperature Pt, Ni resistance R	Voltage, current, temperature Pt, Ni resistance R
2	4	2	2	8 (U/I)/4 (Pt/Ni/R)
24 V DC	24 V DC	24 V DC	24 V DC	24 V DC
≤ 12	≤ 20	≤ 30	≤ 30	Normally 35
≤ 35	≤ 50	≤ 45	≤ 45	≤ 30
< 1	< 1	< 1	< 1	< 1.5
≤ 250 mA; bridged with U_L and GND _L of incoming unit; not protected	-	-	-	-
-10 - 10 V DC/0 - 10 V DC				
Standard, 16 bit/12 bit left-aligned	Standard, 16 bit/12 bit left-aligned	Standard, 16 bit/12 bit left-aligned	Standard, 16-bit/12-bit (left-aligned)	Standard, 16-bit/12-bit (left-aligned)
2/3-/4-conductor + shield	2-conductor + shield	2-conductor	2-conductor	2-conductor
35	30	10	-	±20
≥ 98.5 kΩ	≥ 98.5 kΩ	-	-	≥ 200 kΩ
200	20	-	-	1.5
< 0.2	< 0.3	< 0.2 (normally)	-	< 0.2
≤ 300 ppm/°C of full-scale value	≤ 300 ppm/°C of full-scale value	≤ 300 ppm/°C of full-scale value	≤ 200 ppm/°C of full-scale value	≤ 200 ppm/°C of full-scale value
0 - 20 mA/4 - 20 mA				
Standard, 16 bit/12 bit left-aligned	Standard, 16 bit/12 bit left-aligned	Standard, 16 bit/12 bit left-aligned	Standard, 16-bit/12-bit (left-aligned)	Standard, 16-bit/12-bit (left-aligned)
2/3-conductor + shield	2-conductor	-	-	2-conductor
50	50	-	-	40 (Max. input voltage: < 17 V)
< 125 Ω	< 125 Ω	-	-	< 52 Ω
200	50	-	-	1.5
< 0.2	< 0.3	-	-	< 0.2
≤ 300 ppm/°C of full-scale value	≤ 300 ppm/°C of full-scale value	≤ 300 ppm/°C of full-scale value	≤ 200 ppm/°C of full-scale value	≤ 200 ppm/°C of full-scale value
Thermocouple type B, E, J, K, N, R, S, T to IEC 584, Class 1, 2, 3				
Type B: 100 - 1820 °C	Type B: 100 - 1820 °C	Pt100 RTD, Pt200, Pt500, Pt100 RTDO (EN 60751) Ni100, Ni1000 (DIN 43760)	Pt100 RTD, Pt200, Pt500, Pt100 RTDO (all: EN 60751) Ni100, Ni1000 (DIN 43760), Ni1000TK5000	Pt100 RTD, Pt200, Pt500, Pt100 RTDO (all: EN 60751) Ni100, Ni1000 (DIN 43760), Ni1000TK5000
Type E: -270 - 1000 °C	Type E: -270 - 1000 °C	Platinum RTDs: -200 - 850 °C/-200 - 150 °C	Platinum RTDs: -200 - 850 °C/-200 - 150 °C	Platinum RTDs: -200 - 850 °C/-200 - 150 °C
Type J: -210 - 1200 °C	Type J: -210 - 1200 °C	Nickel RTDs: -60 - 250 °C/-60 - 150 °C	Nickel RTDs: -60 - 250 °C/-60 - 150 °C	Nickel RTDs: -60 - 250 °C/-60 - 150 °C
Type K: -270 - 1370 °C	Type K: -270 - 1370 °C			
Type N: -270 - 1300 °C	Type N: -270 - 1300 °C			
Type R: -50 - 1760 °C	Type R: -50 - 1760 °C			
Type S: -50 - 1540 °C	Type S: -50 - 1540 °C			
Type T: -270 - 400 °C	Type T: -270 - 400 °C			
Standard, 16 bit/12 bit left-aligned				
2-conductor (cold-junction compensation in base module)	2-conductor/3-conductor	2-conductor/3-conductor	2-conductor/3-conductor	2-conductor/3-conductor
< 1 mA	< 1 mA	< 0.5 mA	< 0.5 mA	> 30
> 30	> 30	> 30	> 30	1.5
< 0.2 (type T, -200 - 0 °C: 0.6%)	< 0.2 (type T, -200 - 0 °C: 0.6%)	< 0.2	< 0.2	Pt100 RTD, Ni100: 0.35%, Pt200, Pt500, Pt100 RTDO, Ni1000, Ni1000TK5000: 0.2%
≤ 300 ppm/°C of full-scale value	≤ 300 ppm/°C of full-scale value	≤ 300 ppm/°C of full-scale value	≤ 300 ppm/°C of full-scale value	≤ 200 ppm/°C of full-scale value
0 - 100 Ω, 0 - 200 Ω, 0 - 400 Ω, 0 - 1000 Ω				
Standard, 16 bit/12 bit left-aligned	Standard, 16 bit/12 bit left-aligned	Standard, 16 bit/12 bit left-aligned	Standard, 16 bit/12 bit left-aligned	0 - 250 Ω, 0 - 400 Ω, 0 - 800 Ω, 0 - 2000 Ω
2-conductor/3-conductor	2-conductor/3-conductor	2-conductor/3-conductor	2-conductor/3-conductor	> 30
> 30	> 30	> 30	> 30	1.5
< 0.2	< 0.2	< 0.2	< 0.2	< 0.2
≤ 300 ppm/°C of full-scale value	≤ 300 ppm/°C of full-scale value	≤ 300 ppm/°C of full-scale value	≤ 300 ppm/°C of full-scale value	≤ 200 ppm/°C of full-scale value
XN-S3...-SBB	XN-S6...-SBCSBC	-	XN-S3...-SBB	Already built in
XN-S4...-SBBS	-	With integrated cold-junction compensation XN-S4...-SBBS-CJ	XN-S4...-SBBS	-

Automation products
Analog input modules

		XN-1AO-I(0/4...20MA)	XN-2AO-I(0/4...20MA)	XN-2AO-U(-10/0...+10VDC)	XNE-4AO-U/I
Analog output modules					
Measured variables		Current	Current	Voltage	Voltage, current
Channels	Number	1	2	2	4
Rated voltage at supply terminal	U_L	24 V DC	24 V DC	24 V DC	24 V DC
Rated current drawn from supply terminal ¹⁾	I_L	mA	≤ 50	≤ 50	≤ 150
Rated current drawn from module bus ¹⁾	I_{MB}	mA	≤ 39	≤ 40	≤ 40
Heat dissipation	W	Normally 1	Normally 1	Normally 1	< 3
Output value, Voltage					
Output voltage	V DC	-	-	-10 - 10 V DC / 0 - 10 V DC	-10 - 10 V DC / 0 - 10 V DC
Value representation		-	-	Standard, 16 bit/12 bit left-aligned	Standard, 16-bit/12-bit (left-aligned) Extended range, 16-bit/12-bit (left-aligned) PA (NE43), 16-bit/12-bit (left-aligned)
The following can be connected:		-	-	2-conductor + shield	2-conductor
Load resistor		-	-		
Resistive load	Ω	-	-	> 1000	> 1000
Capacitive load	μF	-	-	< 1	< 1
Transfer frequency	Hz	-	-	< 100	< 20
Recovery time		-	-		
Resistive load	ms	-	-	< 0.1	< 1
Inductive load	ms	-	-	< 0.5	< 2
Capacitive load	ms	-	-	< 0.5	< 2
Short-circuit current	mA	-	-	≤ 40	≤ 40
Basic error limit at 23 °C	%	-	-	< 0.2	< 0.2
Temperature coefficient		-	-	$\leq 300 \text{ ppm}/\text{°C}$ of full-scale value	$\leq 200 \text{ ppm}/\text{°C}$ of full-scale value
Output value, current					
Output current	mA	0 - 20 mA/4 - 20 mA	0 - 20 mA/4 - 20 mA	-	0 - 20 mA/4 - 20 mA
Value representation		Standard, 16 bit/12 bit left-aligned	Standard, 16 bit/12 bit left-aligned	-	Standard, 16-bit/12-bit (left-aligned) Extended range, 16-bit/12-bit (left-aligned) PA (NE43), 16-bit/12-bit (left-aligned)
The following can be connected:		2-conductor + shield	2-conductor + shield	-	2-conductor
Load resistor					
Resistive load	Ω	< 550	< 450	-	< 450
Inductive load	μH	< 1	< 1	-	< 1
Transfer frequency	Hz	< 200	< 200	-	< 20
Recovery time					
Resistive load	ms	< 0.1	< 2	-	< 1
Inductive load	ms	< 0.5	< 2	-	< 2
Capacitive load	ms	< 0.5	-	-	< 2
Short-circuit current	mA				≤ 40
Basic error limit at 23 °C	%	< 0.2	< 0.2	-	< 0.2
Temperature coefficient		$\leq 300 \text{ ppm}/\text{°C}$ of full-scale value	$\leq 300 \text{ ppm}/\text{°C}$ of full-scale value		$\leq 200 \text{ ppm}/\text{°C}$ of full-scale value
Basic modules					
Without C connection		XN-S3...-SBB	XN-S3...-SBB	XN-S3...-SBB	Already built in

¹⁾ Part of the XI/ON module's electronics is supplied with module bus voltage (5 V DC), the other part through the supply terminal (U_L).

	XN-2DO-R-NC	XN-2DO-R-NO	XN-2DO-R-CO
Relay modules			
Contact type		2 NC	2 N/O
Rated voltage at supply terminal	U _L	24 V DC	24 V DC
Rated current drawn from supply terminal	I _L	mA	≤ 20
Rated current drawn from module bus	I _{MB}	mA	≤ 28
Insulation test	U _i	V AC	1500, 500
Heat dissipation		W	Normally 1
The following can be connected:			Resistive loads Inductive loads Lamp loads
Nominal load voltage			230 V AC, 30 V DC
Output current for channel / 230 V AC			
Maximum continuous current		A	2
Maximum continuous current, resistive load			5 A, load-dependent
Minimum load current		mA	100 mA at 12 V DC
Output current for DC voltage (resistive)			Load limit curve → Page 14/109
Utilization factor	g	%	100
Lifespan at 230 V AC			
At 5 A	Opera-tions	x 10 ⁶	> 0.1
At 0.5 A	Opera-tions	x 10 ⁶	> 1
Basic modules			
Without C connection			XN-S4...-SBBS
With C connection			XN-S4...-SBCS



		XN-1CNT-24VDC	XNE-2CNT-2PWM
Rated voltage at supply terminal	U_L	24 V DC	24 V DC
Rated current drawn from supply terminal	I_L	mA $\leq 50^{1)}$	≤ 20
Rated current drawn from module bus	I_{MB}	mA ≤ 40	≤ 50
Heat dissipation		W < 1.3	< 3
Power supply of encoders		Output voltage U_L (-0.8 V) Output current ≤ 0.5 A, short-circuit proof	Output voltage U_L , GND _L Output current 0.5 A, not protected ^{d)}
Digital inputs			
Input voltage			
Input voltage, rated value	V DC	24	24
Low level		-30 V DC - 5 V DC	-30 V DC - 5 V DC
High level		11 V DC - 30 V DC	11 V DC - 30 V DC
Input current			
Low level	mA	-8 mA - 1.5 mA	-1 mA - 1.5 mA
High level	mA	2 mA - 10 mA	2 mA - 10 mA
Minimum pulse width	μs	Filter on: > 25 μs (20 kHz) Filter off: < 2.5 μs (200 kHz)	Filter on: > 25 μs (20 kHz) Filter off: < 2.5 μs (200 kHz)
Counter modules			
Channels	Number	1	2
Resolution	bit	32	32
Measurement ranges			
Frequency		0.1 Hz - 200 kHz	0.01 Hz – 200 kHz (scaleable)
Rotational speed		1 rpm- 25000 rpm	Scaleable
Period duration		5 ms - 120 s	5 ms - 120 s (scaleable)
Counter modes			
Signal evaluation A, B		Pulse and direction, rotary encoder: single/double/quadruple	Pulse and direction, rotary encoder: single/double/quadruple
Operating Mode		Endless count, count once, count periodically	Endless count, count once, count periodically
Hysteresis		8 bit	32 bit
Pulse duration		8 bit / max. 0.51 s	32 bit / max. 120 s
Synchronization		Once/periodic	Once/periodic
Counter limits		Upper count limit: 0 - 7FFF FFFF Lower count limit: 8000 0000 - FFFF FFFF	Upper count limit: 0 - 7FFF FFFF Lower count limit: 8000 0000 - FFFF FFFF
Measurement modes			
Signal evaluation A, B		Pulse and direction, single rotary encoder	Pulse and direction, single rotary encoder
Digital outputs			
Output voltage			
Output voltage, nominal value	V DC	24	24
Low level		≤ 3 V DC	≤ 3 V DC
High level		$\geq U_L$ (-1 V)	$\geq U_L$ (-1 V)
Output current			
High level (permissible range)		5 mA - 2 A	5 mA - 0.6 A
High level (nominal)		≤ 0.5 A (55° C)	0.5 A (55° C)
Switching frequency			
For resistive load	Hz	100	20000 / 100
For inductive load	Hz	2	
For lamps	Hz	≤ 10	
Lamp load	R_{LL}	W ≤ 10	
Output delay		100 μs (resistive load)	25 μs (resistive load)
Short-circuit rating		Yes	Yes
PWM module			
Channels	Number	-	2
PWM		-	0.01Hz - 20 kHz
Period duration/duty cycle		-	32-bit at 41.6 ns/bit
Pulse duration		-	32-bit at 41.6 ns/bit
Pause time		-	32-bit at 41.6 ns/bit
Output, number of pulses		-	32-bit Counter
Pulse output modes		-	Once, endless
General data			
Diagnostics		1 bit	4 Byte
Parameters		15 bit	16 Byte
Basic modules			
No C-connection for sensor/transmitter supply		XN-S4...-SBBS	Already built in
Notes	1) The figures for rated operational current from the supply terminal apply for load current = 0 mA.		

	XN-1RS232	XN-1RS485/422	XN-1SSI
Interfaces			
Type	RS232	RS485/RS422	SSI
Rated voltage at supply terminal	U _L 24 V DC	24 V DC	24 V DC
Rated current drawn from supply terminal	I _L mA 0	≤ 25	≤ 25 ¹⁾
Rated current drawn from module bus	I _{MB} mA ≤ 140	≤ 60	≤ 50
Heat dissipation	W Normally 1	Normally 1	Normally 1
Transfer channels	RxD, TxD, RTS, CTS	RxD, TxD	CL, D
Data buffer			
Receive	Byte 128	128	-
Send	Byte 64	64	-
Connection type			
RS 232	Full-duplex	-	-
RS 485	-	2-wire, half-duplex	-
RS422	-	2-conductor, half-duplex or 4-conductor, full-duplex	4-conductor, full-duplex (clock output/signal input)
Bit transfer rate		Max. 115200 bits/s (parameterizable), Standard: 9600 bits/s, 7 data bits, odd parity and 2 stop bits	Max. 1 MHz (parameterizable), default settings: 500 kBit/s
Insulation test	U _i		
Between interface and module bus/system voltage	V _{eff} 500	500	500
Between interface and field voltage	V _{eff} 500	500	500
Common-mode range	V DC -7 - 12		
Cable impedance	Ω -	120	120
Bus termination	Ω -	120 (external)	internal
Cable length	m Max. 15	Max. 30	Max. 30
Number of diagnosis bytes	1	1	1
Number of parameter bytes	4	4	4
Basic modules			
No C-connection for sensor/transmitter supply	XN-S4...-SBBS	XN-S4...-SBBS	XN-S4...-SBBS

Notes

¹⁾ The figures for rated operational current from the supply terminal apply when there is no sensor/transmitter current.

	XNE-1SWIRE
Supply	
Rated voltage at supply terminal	U _L 24 V DC
Rated current drawn from supply terminal	I _L mA 0
Rated current drawn from module bus	I _{MB} mA 60
Supply voltage connection SWIRE	U _{SW} 24 V DC
Supply current SWIRE (LIN line at full load)	mA ≤ 600
Contactor supply	U _{AUX} 24 V DC
Contactor supply current	A 3
SWIRE connection	
SWIRE lines	Number 1
XNE-1SWIRE modules for XI/ON station	Number ≤ 3
SWIRE nodes for line	Number ≤ 16
Diagnostic bits	Number 4
Data for SWIRE node	max. 4I / 4Q
Supply of SWIRE nodes (short-circuit proof)	17 V DC
Supply current for all LIN nodes (short-circuit proof)	mA ≤ 500
Insulation	
Potential isolation (module bus ↔ U _{SW} / U _{AUX} ↔ U _L)	V _{rms} 500
Potential isolation (U _{SW} ↔ U _{AUX})	V _{rms} None
Climatic requirements	
Ambient temperature	°C 0 - 55
Storage temperature	°C -25 - 85
Humidity (non-condensing)	% 5 - 95
Protection type	IP20




Dimensions

Gateways

Gateways XN

XN-GWBR-PBDP	XN-GW-PDBP-1.5MB	XN-PLC-CANOPEN
XN-GWBR-CANOPEN	XN-GW-PDBP-12MB	
XN-GWBR-DNET	XN-GW-CANOPEN	
XN-GWBR-MODBUS-TCP	XN-GW-DNET	

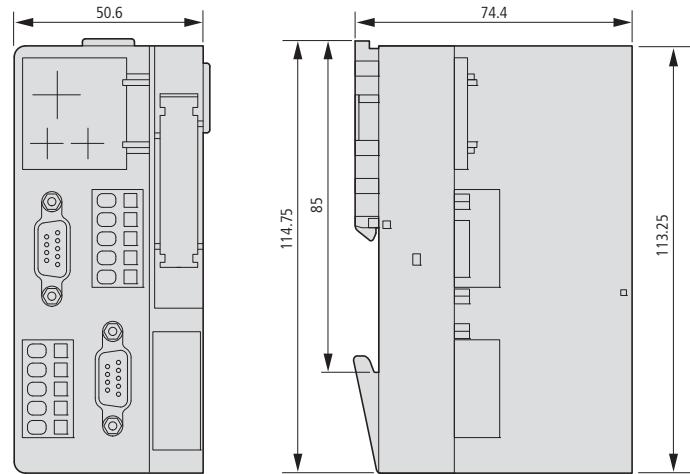


Note:

The plugs/connectors used depend on the version.

Gateways XNE

XNE-GWBR-PBDP
XNE-GWBR-CANOPEN
XNE-GWBR-2ETH-IP

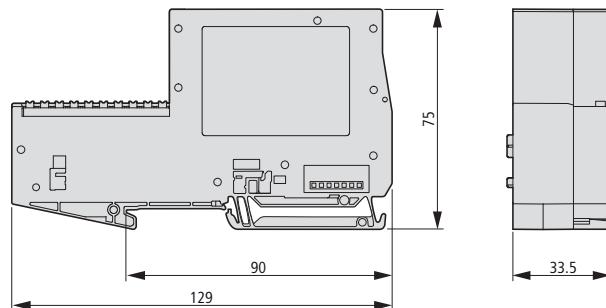

Electronics modules XNE

XNE-8DO-24VDC-0.5A-P

XNE-8DI-24VDC-P

XNE-1SWIRE



XNE-16DI-24VDC-P

XNE-16DO-24VDC-0.5A-P

XNE-8AI-U/I/4Pt/Ni


XNE-4AO-U/I

XNE-2CNT-2PWM

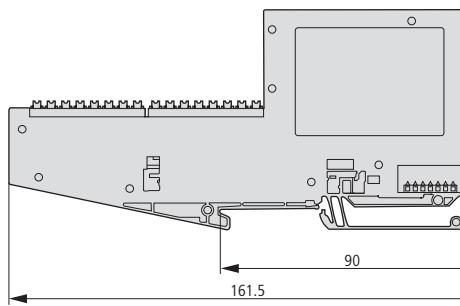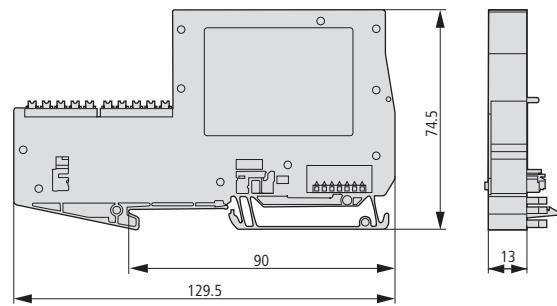


End cover

XN-ABPL

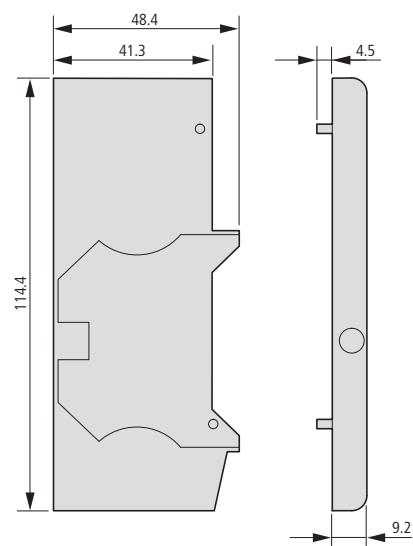


End bracket

XN-WEW-35/2-SW


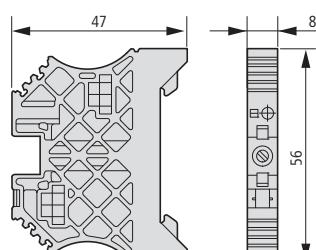


Electronics modules XN in slice design

XN-BR-24VDC-D	XN-2DI-24VDC-P	XN-1AI-I(0/4...20MA)	XN-1CNT-24VDC
XN-PF-24VDC-D	XN-2DI-24VDC-N	XN-2AI-I(0/4...20MA)	XN-1RS232
XN-PF-120/230VAC-D	XN-2DI-120/230VAC	XN-1AI-U(-10/0...+10VDC)	XN-1RS485/422
	XN-4DI-24VDC-P	XN-2AI-U(-10/0...+10VDC)	XN-1SSI
	XN-4DI-24VDC-N	XN-2AI-Pt/Ni-2/3	
	XN-2DO-24VDC-2A-P	XN-2AI-THERMO-PI	
	XN-2DO-24VDC-0.5A-P	XN-4AI-U/I	
	XN-2DO-24VDC-0.5A-N	XN-1AO-I(0/4...20MA)	
	XN-2DO-120/230VAC-0.5A	XN-2AO-I(0/4...20MA)	
	XN-4DO-24VDC-0.5A-P	XN-2AO-U(-10/0...+10VDC)	
	XN-2DO-R-CO		
	XN-2DO-R-NC		
	XN-2DO-R-NO		

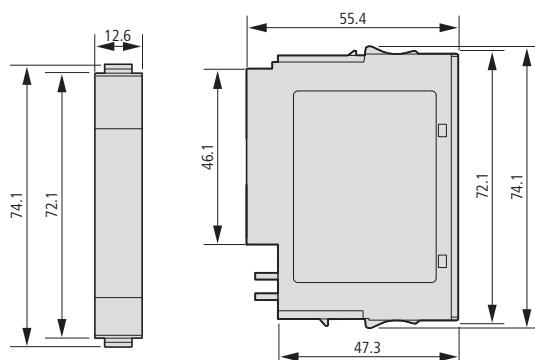
**Electronics modules XN in block design**

XN-16DI-24VDC-P
XN-32DI-24VDC-P
XN-16DO-24VDC-0.5A-P
XN-32DO-24VDC-0.5A-P

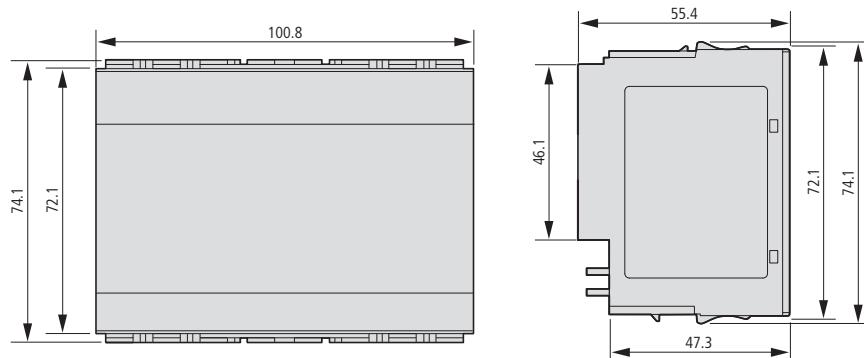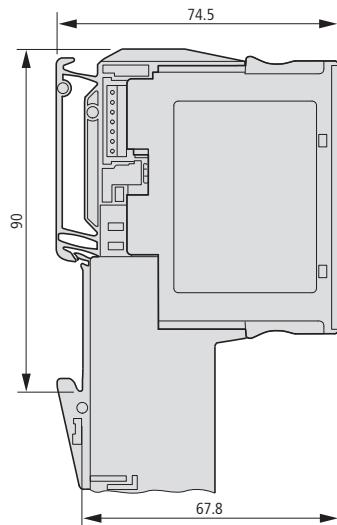**Electronics modules XN completed with base module**


Basic modules in slice design

Spring-cage terminals	3 connection levels	4 connection levels	6 connection levels
XN-S3T-SBB	XN-S4T-SBBC	XN-S6T-SBBSBB	
XN-S3T-SBC	XN-S4T-SBBS	XN-S6T-SBCSBC	
XN-P3T-SBB	XN-S4T-SBBS-CJ		
XN-P3T-SBB-B	XN-S4T-SBCS		
	XN-P4T-SBBC		
	XN-P4T-SBBC-B		

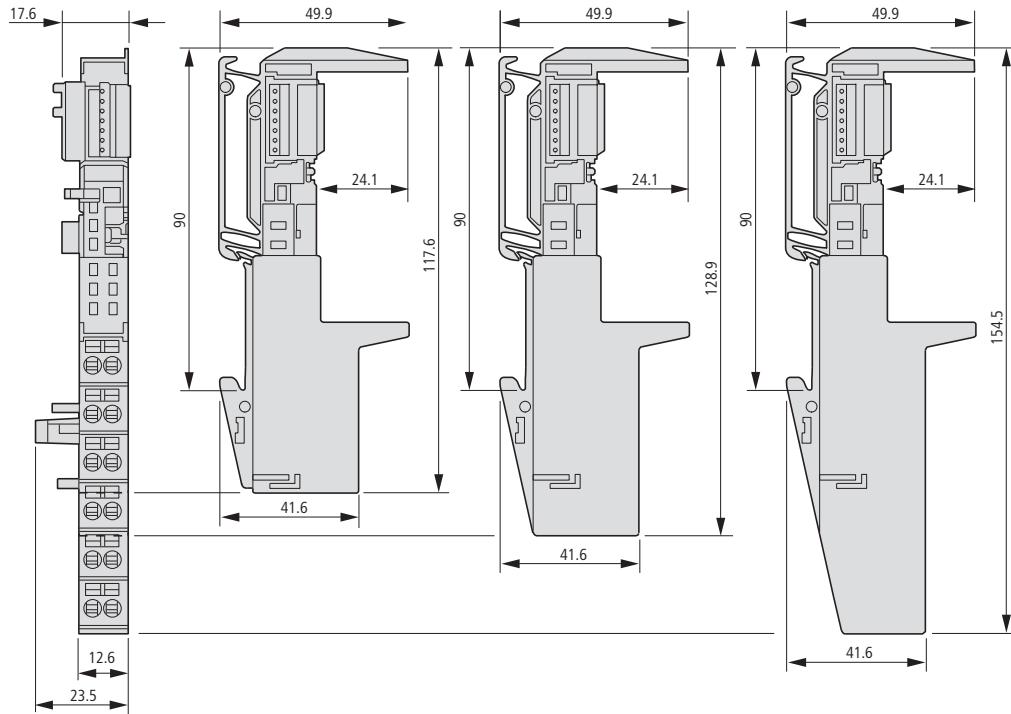


Screw terminals

	3 connection levels	4 connection levels	6 connection levels
XN-S3S-SBB	XN-S4S-SBBC	XN-S6S-SBBSBB	
XN-S3S-SBC	XN-S4S-SBBS	XN-S6S-SBCSBC	
XN-P3S-SBB	XN-S4S-SBBS-CJ		
XN-P3S-SBB-B	XN-S4S-SBCS		
	XN-P4S-SBBC		
	XN-P4S-SBBC-B		

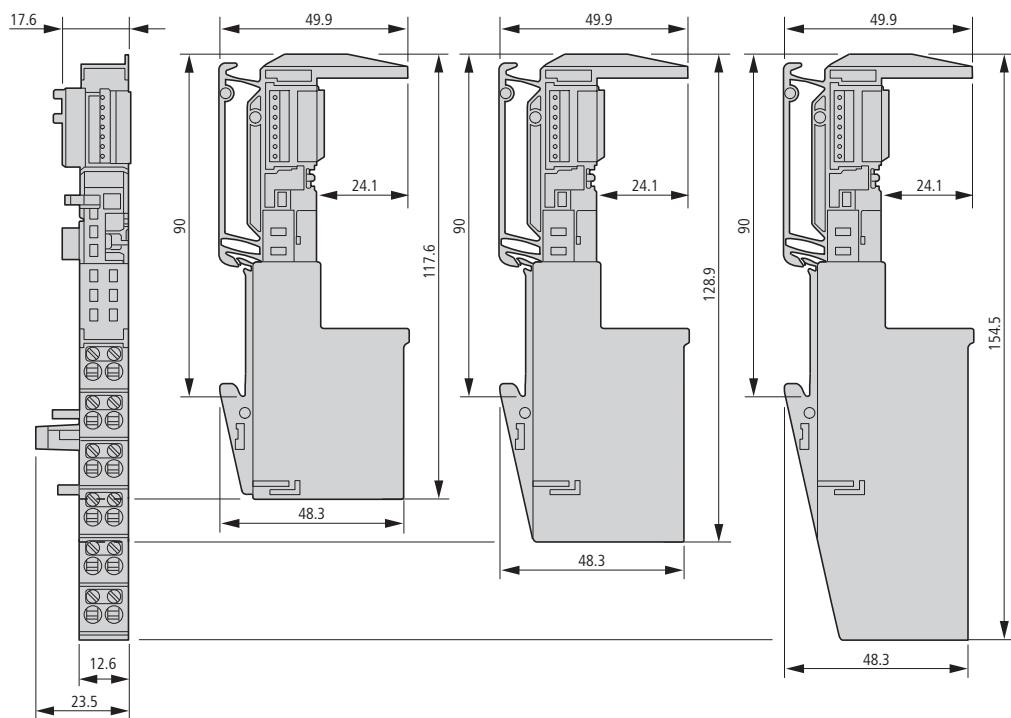


Basic modules in block design

Spring-cage terminals

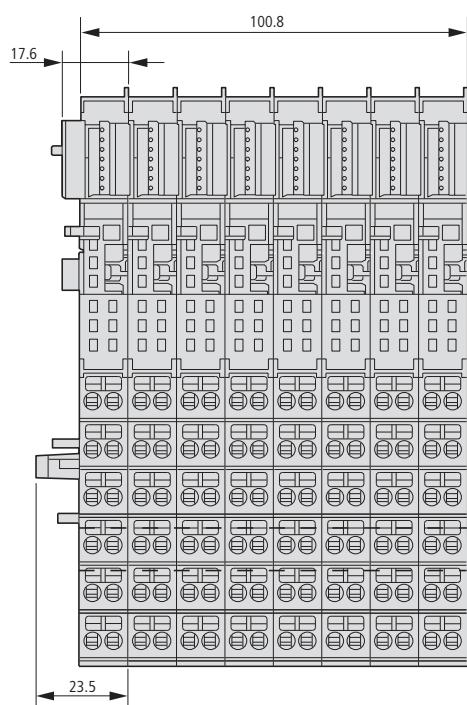


3 connection levels

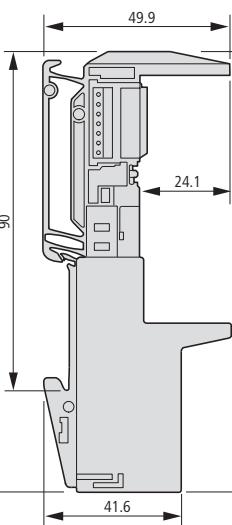
XN-B3T-SBB
XN-B3T-SBC

4 connection levels


XN-B4T-SBBC

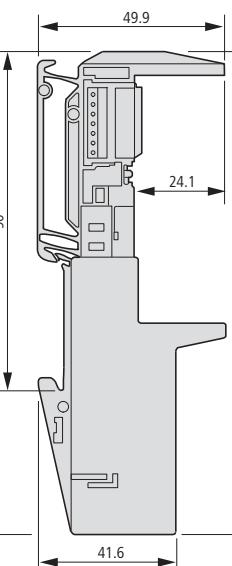


6 connection levels

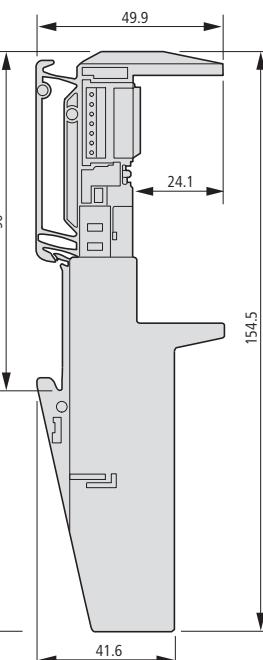XN-B6T-SBBSBB
XN-B6T-SBCSBC

Screw terminals

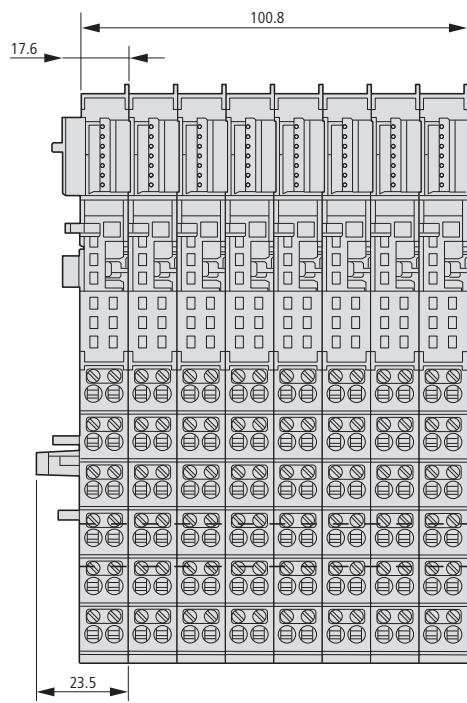


3 connection levels

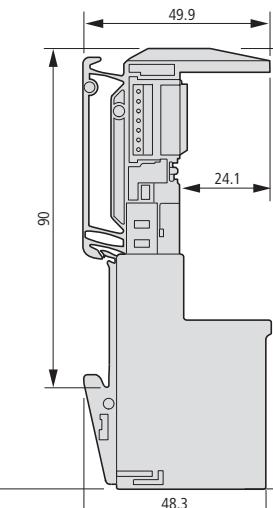
XN-B3S-SBB
XN-B3S-SBC

4 connection levels

XN-B4S-SBBC

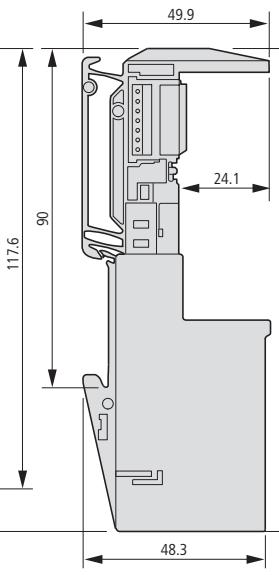

6 connection levels

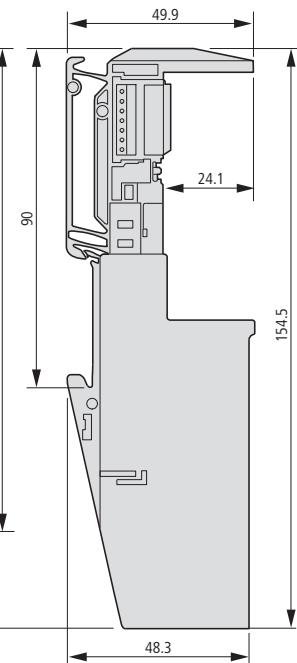XN-B6S-SBBSBB
XN-B6S-SBCSBC

Description



Visualization software Galileo

The powerful, comprehensive engineering platform Galileo is ideal for use in all machine- and process-related applications in plant and machine construction.

- Fast engineering with project simulation on development PC.
- Easy-to-learn, intuitive graphical user interface with project overview window.
- Range of interface styles.
- Object placement with drag & drop WYSIWYG (what you see is what you get).
- Easy object parameterization.
- Object properties table, simple and quick attribute assignment with copy & paste.
- Pointer object.
- Extended password handling with complex password and ageing.
- Comprehensive recipe handling.
- Alarm handling with time stamp, history and diagnostics support with image display.
- Convenient batch definition of texts and graphics for variables.
- Many graphical objects, such as bar graph, scroll bar, graph plotter, line graph, and camera.
- Object parameter list, any number of data objects for template.
- Dynamic measurement unit selection (e.g. °C <-> °F, inches <-> mm).
- Many specific objects and functions.
- Direct printing at panel (reports, forms).
- Brilliant image reproduction with up to 65536 colors.
- Import of 15 different graphic formats.
- Easy import of PLC variables.
- Online language selection.
- Unicode support (including Asian character sets).
- Text import/export in XML format, e.g. Excel.
- Full functionality always available; no performance grading.
- Dynamic objects.

Useful add-on tools

S7 PG router: Programming S7 PLCs connected to the panel through the Ethernet interface.


CE Telediag: Convenient remote maintenance through a modem connection with dial assistant and device call-back.

CAN monitor: Observing and tracing CAN messages with relative time stamp for COB-ID and data directly on the panel.

EPAM: visualization tool for Microsoft Office

Designed as an open visualization tool for OEM machine vendors, EPAM can be expanded with custom funtions programmed in Visual Basic at any time.

- The visualization is configured in Microsoft Excel.
- Every visualization created with EPAM is web-capable, allowing remote plant operation from any standard PC without having to install additional Software.

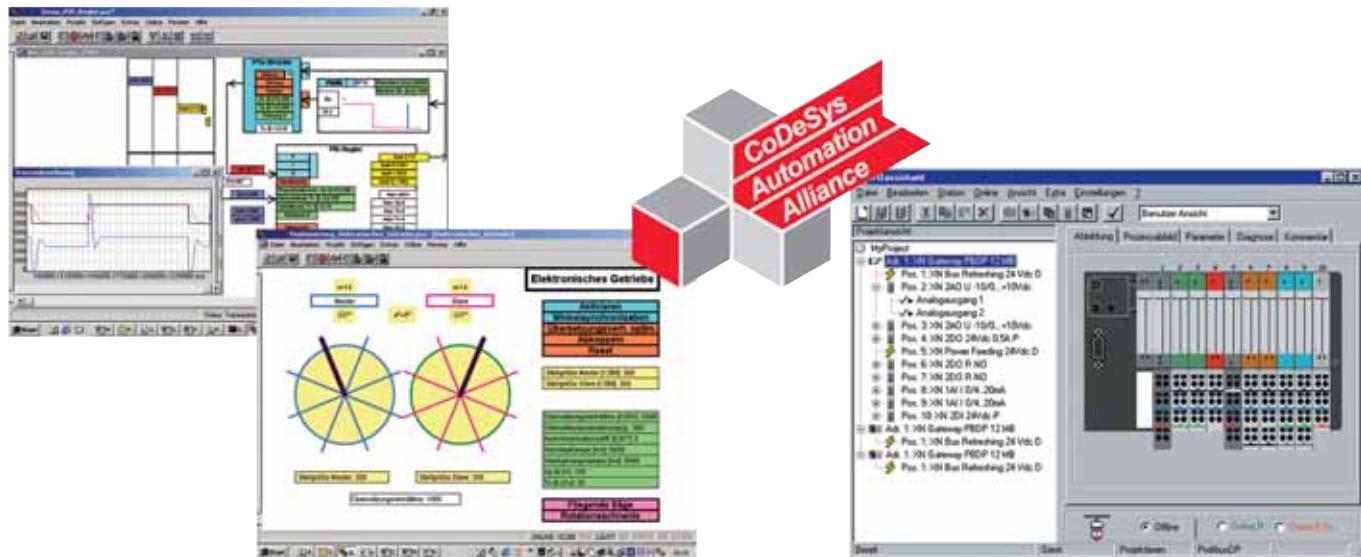

PLC programming with XSOFT-CODESYS-2

The CoDeSys-based software XSOFT-CODESYS-2 offers matured technical features and easy operation. CoDeSys is one of the most powerful IEC 61131-3 PLC programming tools. All five programming languages of the standard are supported.

- SMS/e-mail library for alarm message notifications.
- UDP/TCP library for powerful Ethernet communication with PC-based applications.
- FTP server/client.

Web visualization (XV100, XVS400 and XV400 only):

Optionally XSOFT-CODESYS-2 can generate an XML description from the visualization information, which is saved to the PLC together with a Java applet and can be displayed in a web browser through TCP/IP to make the visualization data available online on a wide range of platforms.

Target visualization (XV100, XVS400 and XV400 only):

The programming system can convert visualization information into IEC 61131-3 code and translate it for the respective target system with the code generator.

Closed-loop control toolbox:

The closed-loop control toolbox contains about 120 function blocks. The standard function blocks provide leverage of the implemented closed-loop control know-how. Being combinable and cascadable, the function blocks allow the creation of special application solutions.

Motion control toolbox:

The motion control toolbox contains about 40 function blocks that can be individually incorporated and optimally adapted to the automation task.

I/O configuration tool I/Oassistant for XI/ON

The free software I/Oassistant is a universal tool that provides interactive support in planning and implementing your XI/ON system. Just select the gateways, electronics, base modules and accessories, and the program configures your stations either online or offline. Once designed, the system can go into operation. Integrated in XSOFT-CODESYS-2, the I/Oassistant engineering tool for XI/ON is also available within the PLC programming software. Without having to quit XSOFT-CODESYS-2, you have access to the full functionality of I/Oassistant to interactively plan and implement your remote XI/ON station.

- I/Oassistant automatically generates a full parts list for your order.
- With the [Check station design] function, you can easily check the configured station design.
- Commissioning the I/O level without connected controller possible; servicing interface
- EPLAN support.

Planning and ordering help (SWD?Assist)



Planning a SmartWire-Darwin line is quick and easy with the SWD-Assist software. Generate applications easily and quickly with the system SmartWire-Darwin.

- Built-in function for generating ordering lists.
- Built-in validity check.

Free download from

<http://downloadcenter.moeller.net>

Ordering

Description		Part no. Article no.	Price See price list	Std. pack	Information relevant for export to North America
Visualization software					
GALILEO	Microsoft Windows™-based, intelligent and interactive visualization tool. For creating projects to operate and visualize machines, plants and buildings. Comprehensive help and documentation.	SW-GALILEO 140379		1 off 	UL/CSA certification not required
GALILEO OPEN	For continuous, unrestricted operation of the GALILEO runtime systems on a standard PC. The runtime system software is part of the development software GALILEO.	LIC-GALILEO-OPEN-PC 140385			
EPAM	Open visualization system Easy Page Machine (EPAM) An add-in for Microsoft Excel.	SW-EPAM 140380			
PLC programming software					
XSOFT-CODESYS-2	Programming to IEC 61131-1 with IL, ST, LAD, FBD, AS, CFC Supports XV, XC, XN, EC4P Bus configuration CAN, PROFIBUS-DP, XI/ON. Menu selection in 5 languages Operating systems: Win NT 4.0 SP6, Win 2000 SP3, Win XP SP2, Windows Vista OPC configurator Comprehensive help and documentation.	SW-XSOFT-CODESYS-2-S¹⁾ 142582		1 off 	UL/CSA certification not required
XSOFT-CODESYS-2	Single-user license	SW-XSOFT-CODESYS-2-M²⁾ 142583		1 off	
Add-on software					
S7-PG router	For programming S7 PLCs through the panel's Ethernet interface. Suitable for XV100, XV200, and XVS400 devices with on-board PROFIBUS and Ethernet Interface. 80 license points required on the device → Page 14/14. Including software with documentation and license product certificate with 80 points for licensing one device.	SW-S7-PG-ROUTER 140381		1 off 	UL/CSA certification not required
CE Telediag	For remote maintenance through a modem connection with dial assistant and device call-back. Suitable for XV100, XV200, XVS400, XV400 and XVH300 devices on-board RS232 interface 40 license points required on the device → Page 14/14. Including software with documentation and license product certificate with 40 points for licensing one device.	SW-CE-TELEDIAG 140383			
CAN monitor	For observing and tracing CAN messages with relative time stamp, COB-ID and data. Error frames are not detected. Suitable for XV100, XV200, XV400 and XVH300 devices with on-board CAN interface. No licence points required. Includes software with documentation.	SW-CAN-MONITOR 140382			
Domain server	Connection of a Micro Panel with GALILEO project to the central user management of a Windows 2003 Server domain.	SW-DOMAIN-SERVER 140384			

Notes¹⁾ Replaces ECP-Soft²⁾ Replaces MXPRO

Ordering

	Rated input voltage 50/60 Hz V AC	Rated output voltage (residual ripple) V DC	Input voltage range V	Rated output current A	Part no. Article no.	Price See price list	Std. pack
Power supply units GW4, GD4							
Unregulated, smoothed							
Single-phase	230	24 ($\pm 5\%$)	—	3	GW4-030-BA3 200016		1 off
	230	24 ($\pm 5\%$)	—	5	GW4-050-BA3 200017		
	230	24 ($\pm 5\%$)	—	8	GW4-080-BA3 200018		
	230	24 ($\pm 5\%$)	—	10	GW4-100-BA3 200019		
Three-phase	400 ($\pm 5\%$)	24 ($\pm 3\%$)	—	5	GD4-050-BD3 200007		
	400 ($\pm 5\%$)	24 ($\pm 3\%$)	—	10	GD4-100-BD3 200009		
	400 ($\pm 5\%$)	24 ($\pm 3\%$)	—	15	GD4-150-BD3 200011		
	400 ($\pm 5\%$)	24 ($\pm 3\%$)	—	20	GD4-200-BD3 200012		
	400 ($\pm 5\%$)	24 ($\pm 3\%$)	—	30	GD4-300-BD3 200014		
Switched-mode power supply units SN3							
Primary switched-mode power supply unit, power reserve of up to 50 %, Up to 5 devices can be connected in parallel increase power and for redundancy							
	110 - 240 AC	24 V DC (fixed) (20 MHz normally < 50 mV _{ss})	85 - 264 AC 100 - 350 DC ¹⁾	5	SN3-050-BU8 100640		1 off
	110 - 120 AC 220 - 240 AC	24 V DC (fixed) (20 MHz normally < 50 mV _{ss})	85 - 132 AC 184 - 264 AC 220 - 350 DC ¹⁾	10	SN3-100-BV8 100641		
	110 - 120 AC 220 - 240 AC	24 V DC (fixed) (20 MHz normally < 50 mV _{ss})	85 - 132 AC 184 - 264 AC 220 - 350 DC ¹⁾	20	SN3-200-BV8 100642		
	110 - 240 AC/DC	22 - 28 V DC (adjustable) (20 MHz normally < 50 mV _{ss})	85 - 264 AC 100 - 350 DC ¹⁾	5	SN3-050-EU8 100643		
	110 - 240 AC/DC	22 - 28 V DC (adjustable) (20 MHz normally < 50 mV _{ss})	85 - 264 AC 100 - 350 DC ¹⁾	10	SN3-100-EU8 100644		
	110 - 240 AC/DC	22 - 28 V DC (adjustable) (20 MHz normally < 50 mV _{ss})	85 - 264 AC 100 - 350 DC ¹⁾	20	SN3-200-EU8 100645		
Switched-mode power supply units easyPOW							
Primary-switched mode, regulated							
	100 - 240	24/12	—	0.35 0.02	EASY200-POW 229424		1 off
	100 - 240	24 ($\pm 3\%$)	—	1.25	EASY400-POW 212319		
	100 - 240	24 ($\pm 3\%$)	—	1.25	EASY430-POW 110940		
	100 - 240	24 ($\pm 3\%$)	—	2.5	EASY500-POW 110941		
	100 - 240	24 ($\pm 3\%$)	—	4.2	EASY600-POW 262399		
Signal module for power supply units SN3-...-EU8							
	LED display: Input OK LED display: Output OK LED display: Remote off Relay output 1 changeover: Input OK Relay output 1 changeover: Output OK Remote On/Off function for external switching		For use with SN3-50-EU8 SN3-100-EU8 SN3-200-EU8		SN3-000-MMEU8 100646		1 off



¹⁾ At U \geq 264 V DC, use suitable external fuse in addition²⁾ For UL/CSA information, technical data and dimensions see Chapter 12.**Notes**

	Power supply units GD4				
	GD4-050-BD3	GD4-100-BD3	GD4-150-BD3	GD4-200-BD3	GD4-300-BD3
General					
Protection class	1				
Potential isolation	Yes, VDE 0551, IEC/EN 60742, SELV				
Mains frequency					
Rated value	50/60				
Range	50...60				
Electromagnetic compatibility (EMC)					
Emitted interference	Class B (EN 55011, 22)				
ESD	6 kV contact (Level 3), 8 kV air (Level 3), IEC/EN 61000-4-2				
RFI	10 V/m, modulated, IEC/EN 61000 4-2				
Burst	2 kV (Level 3) IEC/EN 61000-4-4				
Surge	2 kV (Inst. Class 3), IEC/EN 61000-4-5				
Impulse voltage	4.9 kV, IEC EN 60947				
Environmental data					
Ambient temperature	-25 - 55				
Ambient temperature, storage	-25 - 85				
Pollution degree	2, EN 50178				
Vibration	0.075 mm (10 - 57 Hz), 10 cycles, IEC 60068-2-6				
Shock resistance, shock duration 11 ms	15, IEC 60068-2-27 (3 shocks)				
Installation altitude	Max. 2000 m a.m.s.l., observe derating above this ¹⁾				
Protection type	IP20				
Fixing	Screw-on				
Mounted position	Any				
Input voltage					
Rated value	V AC	400	400	400	400
Range	V AC	Taps ± 5% 380, 400, 420			
Rated input current for phase	A	0.24	0.46	0.65	0.9
No-load losses	W	5	14.2	13.9	25.5
Short-circuit losses	W	19.6	28.6	44.2	59
Output voltage					
Rated value	V DC	24	24	24	24
Tolerance					
Tolerance		See current/voltage characteristic			
Ripple	%	—	—	—	—
Output current (rated value)	A	5	10	15	20
Output current range at 55 °C	A	0 - 5	0 - 10	0 - 15	0 - 20
Terminal capacity					
Solid	mm ²	0.5 - 4	0.5 - 4	0.5 - 4	0.5 - 4
Flexible with ferrule	mm ²	0.5 - 2.5	0.5 - 2.5	0.5 - 2.5	0.5 - 2.5
Connections		Screw terminals	Screw terminals	Screw terminals	Screw terminals
Dimensions					
Width	mm	125	155	155	190
Height	mm	73	82	97	105
Depth	mm	140	170	170	225
Weight	kg	2.4	4.4	5.8	7.6
Protection					
Input voltage	u ₁ V	3 x 400	3 x 400	3 x 400	3 x 400
Input current	I ₁ A	0.24	0.46	0.65	0.9
Circuit-breaker					
PKZ		PKZM0-0,25	PKZM0-0,63	PKZM0-1	PKZM0-1
Current setting	A	0.24	0.46	0.65	0.9
Miniature circuit-breaker (MCB)					
FAZ		FAZ-S1/1	FAZ-S1/1	FAZ-S1/1	FAZ-S2/1
Short-circuit protection only		●	●	—	—

Notes¹⁾ DeratingFrom +44 to +55 °C: linear derating
from 100 % to 93 %

	Power supply units GW4				Notes
	GW4-030-BA3	GW4-050-BA3	GW4-080-BA3	GW4-100-BA3	
Current-voltage characteristic					
1					At 230 V or 3 x 400 V AC (primary side) and a load current of I = 0 A up to the rated operational current 1x I _q
Yes, VDE 0551, IEC/EN 60742, SELV					
50/60					
Class B (EN 55011, 22)					
6 kV contact (Level 3), 8 kV air (Level 3), IEC/EN 61000-4-2					
10 V/m, modulated, IEC/EN 61000 4-2					
2 kV (Level 3) IEC/EN 61000-4-4					
2 kV (Inst. Class 3), IEC/EN 61000-4-5					
4.9 kV, IEC EN 60947					
-25 - 55					
-25 - 85					
2, EN 50178					
0.075 mm (10 - 57 Hz), 10 cycles, IEC 60068-2-6					
15, IEC 60068-2-27 (3 shocks)					
Max. 2000 m a.m.s.l., observe derating above this ¹⁾					
IP20					
Screw-on					
Any					
230	230	230	230	230	
230	230	230	230	230	
0.45	0.8	1.2	1.4		
7.6	9	12.8	10.2		
15.5	29.7	32.7	35		
24	24	24	24	24	
See current/voltage characteristic					
—	—	—	—	—	
≤ 5	≤ 5	≤ 5	≤ 5	≤ 5	
3	5	8	10		
0 - 3	0 - 5	0 - 8	0 - 10		
0.5 - 4	0.5 - 4	0.5 - 4	0.5 - 4	0.5 - 4	
0.5 - 2.5	0.5 - 2.5	0.5 - 2.5	0.5 - 2.5	0.5 - 2.5	
Screw terminals	Screw terminals	Screw terminals	Screw terminals	Screw terminals	
85	85	106	121		
90	98	100	105		
122	135	151	169		
2	2.5	3.65	4.45		
230	230	230	230		
0.45	0.8	1.2	1.4		
PKZM0-0,63	PKZM0-1	PKZM0-1,6	PKZM0-1,6		
0.45	0.8	1.2	1.4		
FAZ-S1/1	FAZ-S1/1	FAZ-S2/1	FAZ-S2/1		
●	—	—	—		

GD4.. with transformer
At 230 V or 3 x 400 V AC (primary side) and a load current of I = 0 A up to the rated operational current 1x I_q

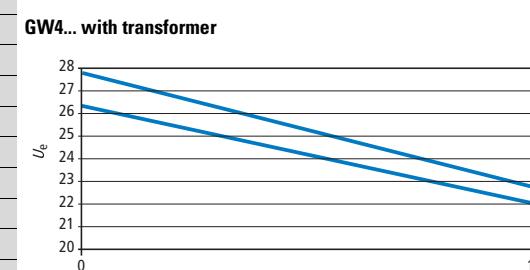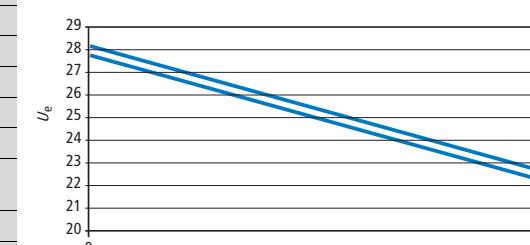

	SN3-050-BU8	SN3-100-BV8	SN3-200-BV8	SN3-050-EU8	SN3-100-EU8	SN3-200-EU8					
General											
Standards	EN 61204, 73/23/EWG, 89/336/EWG, EN 50178, EN 60950, UL 60950, UL 508, SELV (EN 60950)										
Protection type											
Enclosure	IP20	IP20	IP20	IP20	IP20	IP20					
Terminals	IP20	IP20	IP20	IP20	IP20	IP20					
Protection class	According to EN 61140, Class 1										
Mounting	DIN rail (IEC/EN 60715), snap fixing										
Mounted position	Horizontal	Horizontal	Horizontal	Horizontal	Horizontal	Horizontal					
Heat dissipation	W	Normally ≤ 15	Normally ≤ 29	Normally ≤ 58	Normally ≤ 15	Normally ≤ 29					
Efficiency	%	≥ 88	≥ 88	≥ 88	≥ 88	≥ 88					
Dimensions											
Width	mm	57	90	200	57	90					
Height	mm	130	130	130	130	130					
Depth	mm	130	130	130	130	130					
Weight	kg	0.96	1.07	2.83	0.96	1.07					
Minimum distance to adjacent devices		Horizontal 10, vertical 80									
Terminal capacity											
Input circuit	Only operate plug-in terminals off load.										
Flexible with ferrule	mm ²	0.2...2.5 (22...14 AWG)	2.5 ... 10 (14 ... 8 AWG)	0.2...2.5 (22...14 AWG)	2.5 ... 10 (14 ... 8 AWG)	0.5 ... 10 (20 ... 8 AWG)					
Flexible without ferrule	mm ²	0.2...2.5 (22...14 AWG)	0.5 ... 10 (20 ... 8 AWG)	0.2...2.5 (22...14 AWG)	0.5 ... 10 (20 ... 8 AWG)	0.5 ... 16 (22 ... 6 AWG)					
Solid	mm ²	0.2...2.5 (22...14 AWG)	0.5 ... 16 (22 ... 6 AWG)	0.2...2.5 (22...14 AWG)	0.5 ... 16 (22 ... 6 AWG)	0.5 ... 16 (22 ... 6 AWG)					
Output circuit											
Flexible with ferrule	mm ²	0.12...2.5 (26...14 AWG)	2.5 ... 10 (14 ... 8 AWG)	0.12...2.5 (26...14 AWG)	2.5 ... 10 (14 ... 8 AWG)	0.5 ... 10 (20 ... 8 AWG)					
Flexible without ferrule	mm ²	0.12...2.5 (26...14 AWG)	0.5 ... 10 (20 ... 8 AWG)	0.12...2.5 (26...14 AWG)	0.5 ... 10 (20 ... 8 AWG)	0.5 ... 16 (22 ... 6 AWG)					
Solid	mm ²	0.12...2.5 (26...14 AWG)	0.5 ... 16 (22 ... 6 AWG)	0.12...2.5 (26...14 AWG)	0.5 ... 16 (22 ... 6 AWG)	0.5 ... 16 (22 ... 6 AWG)					
Environmental data											
Ambient temperature, operation	°C	-25 - +70	-25 - +70	-25 - +70	-25 - +70	-25 - +70					
Ambient temperature, full load	°C	0 - +60 (without derating)									
Ambient temperature, storage	°C	-40 - +85	-40 - +85	-40 - +85	-40 - +85	-40 - +85					
Climatic proofing	According to IEC 60068-2-3, 93% at +40 °C, non-condensing										
Pollution degree	According to EN 50178; 2										
Climate class (IEC)	According to EN 60721; 3K3										
Vibration resistance (IEC/EN 60068-2-6)	1...57 Hz, amplitude ±0.075 mm; 57...100 Hz, 5 g										
Shock resistance (IEC 60068-2-27)	30 g all directions										
Insulation voltage											
Inputs/outputs	3 kV AC (type test), 1.2 kV AC (routine test)										
Input	1.5 kV AC (type test), 1.2 kV AC (routine test)										
Output	350 V AC (routine test)										
Electromagnetic compatibility (EMC)											
Interference immunity	EN 61000-6-2										
ESD	According to EN 61000-4-2, Level 4-8 kV/15 kV										
RFI	According to EN 61000-4-3, Level 3-10 V/m										
Burst	According to EN 61000-4-4, Level 4-4 kV										
Surge	According to EN 61000-4-5, Level 4-2 kV symmetrical, level 3-3 kV asymmetrical										
Conducted HF	According to EN 61000-4-6, Level 3-10 V										
Emitted interference	EN 61000-6-3										
Electromagnetic fields	According to EN 55022, Class B										
Conducted HF	According to EN 55022, Class B										



		SN3-050-BU8	SN3-100-BV8	SN3-200-BV8	SN3-050-EU8	SN3-100-EU8	SN3-200-EU8
Input circuit							
Rated input voltage	V	110 ... 240 AC	–	–	110 ... 240 AC	110 ... 240 AC	110 ... 240 AC
Switch position 110	V	–	110 ... 120 AC	110 ... 120 AC	–	–	–
Switch position 230	V	–	220 ... 240 AC	220 ... 240 AC	–	–	–
Primary voltage range	V	85 ... 264 AC	–	–	85 ... 264 AC	85 ... 264 AC	85 ... 264 AC
Input voltage range ¹⁾	V	100 ... 350 DC	–	–	100 ... 350 DC	100 ... 350 DC	100 ... 350 DC
Switch position 110 V AC	V	–	85 ... 132 AC	85 ... 132 AC	–	–	–
Switch position 230 V AC	V	–	184 ... 264 AC	184 ... 264 AC	–	–	–
Switch position 230 V DC	V	–	220 ... 350 DC	220 ... 350 DC	–	–	–
Mains frequency							
Rated value	Hz	50/60	50/60	50/60	50/60	50/60	50/60
Range	Hz	47...63	47...63	47...63	47...63	47...63	47...63
Current consumption							
At 110 ... 240 V AC	A	Approx. 2.2 ... 1.2	–	–	Approx. 2.2 ... 1.2	Approx. 3.5 ... 1.6	Approx. 5.5 ... 2.5
At switch position 110 V AC	A	–	Approx. 4.2 ... 4.0	Approx. 9.0 ... 8.0	–	–	–
At switch position 230 V AC	A	–	Approx. 2.4 ... 2.2	Approx. 4.4 ... 4.0	–	–	–
Input power	W	Normally 135	Normally 269	Normally 538	Normally 135	Normally 269	Normally 538
Inrush current limiter/i ² t (cold start)		≤ 23 A / ca. 0.9 A ² s	≤ 40 A / ca. 1.8 A ² s	≤ 70 A / ca. 8 A ² s	≤ 23 A / ca. 0.9 A ² s	≤ 33 A / ca. 0.2 A ² s	≤ 40 A / ca. 1.9 A ² s
Mains failure bridging duration	ms	Normally ≥ 100	Normally ≥ 50	Normally ≥ 50	Normally ≥ 100	Normally ≥ 40	Normally ≥ 40
Start-up after mains voltage applied	ms	Normally ≥ 100	Normally ≥ 10	Normally ≥ 20	Normally ≥ 100	Normally ≥ 5	Normally ≥ 370
Transient overvoltage protection		Varistors	Varistors	Varistors	Varistors	Varistors	Varistors
Internal input fuse (device protection, not accessible)		4 AT	6.3 AT	12 AF	4 AT	6.3 AT	12 AF
Leakage current to PE	mA	< 3.5 mA	< 3.5 mA	< 3.5 mA	< 3.5 mA	< 3.5 mA	< 3.5 mA
Output circuit							
L+, L+, L-, L-		Proof against short-circuit, no-load and overload					
Rated output voltage	V	24 DC	24 DC	24 DC	24 DC	24 DC	24 DC
Tolerance		-1...+5 %	-1...+5 %	-1...+5 %	-1...+5 %	-1...+5 %	-1...+5 %
Output voltage setting range		Fixed 24 V DC			22...28 V DC; default setting 24 V ±0.5%		
Rated output power	W	120	240	480	120	240	480
Rated output current T _u ≤ 60 °C	A	5	10	20	5	10	20
Peak output current (power reserves) T _u ≤ 40 °C	A	Normally ≤ 7.25	Normally ≤ 12.25	Normally ≤ 22.5	Normally ≤ 7.25	Normally ≤ 12.25	Normally ≤ 22.5
Derating 60 °C ≤ T _u ≤ 70 °C		2.5 % for Kelvin temperature increase					
Control deviation at							
Load change 10...90 %, static	Normally	±0.1 %	±0.1 %	±0.1 %	±0.05 %	±0.05 %	±0.05 %
Load change 10...90 %, dynamic	Normally	±3 %	±3 %	±3 %	±3 %	±3 %	±3 %
Controller acting time	ms	Normally 1	Normally 1	Normally 1	Normally 1	Normally 1	Normally 1
Input voltage deviation ±10 %		Normally ±0.05 %	Normally ±0.05 %	Normally ±0.05 %	Normally ±0.05 %	Normally ±0.05 %	Normally ±0.05 %
Rise time 10...90 %	ms	Normally ≤ 30	Normally ≤ 5	Normally ≤ 15	Normally ≤ 30	Normally ≤ 4	Normally ≤ 12
Residual ripple and switching peaks		20 MHz normally < 50 mV _{ss}					
Parallel connection capability		Yes, up to 5 devices for redundancy and for power increase, non symmetrical current					
Series connection capability		Yes, for voltage increase (max. 2 off)					
Resistance to reverse feed		Yes, limited to Approx. 35 V AC					
Power factor correction (PFC)		No		Yes			
Status indication		OUTPUT OK: LED green					
Overload characteristics		Thermal protection			Thermal protection		
Response to short-circuit		Continuously with current limitation					
Current limitation at short-circuit	A	Approx. 11	Approx. 19	Approx. 25	Approx. 11	Approx. 19	Approx. 25
Short-circuit protection		Proof against sustained short circuit					
Overload protection		Thermal protection					
Capacitive load starting		Not restricted					

Notes¹⁾ At ≥ 264 V DC, use suitable external fuse in addition


			SN3-000-MMEU8
General			
Standards			IEC 61204 73/23/EEC 89/336/EEC EN 50178, EN 60950, UL 60950, UL 508
Duty factor		%	100
Dimensions (W x H x D)		mm	56.25 x 54 x 24 (in fitted state)
Weight		kg	0.065
Terminal capacity			
Flexible with ferrule		mm ²	0.2...2.5 (22...14 AWG)
Flexible without ferrule		mm ²	0.2...2.5 (22...14 AWG)
Solid		mm ²	0.2...4 (22...14 AWG)
Protection type			
Enclosure			IP20
Terminals			IP20
Protection class			2
Mounting			Snap-fitted to power supply unit
Fixing			Snap-fitting, tool-less
Vibration resistance (IEC/EN 60068-2-6)			1...57 Hz, amplitude ±0.075 mm, 57...100 Hz, 5 g
Shock resistance (IEC 60068-2-27)			5 g all directions
Environmental data			
Ambient temperature			
Operation		°C	-25...+70
Storage		°C	-40...+85
Climatic proofing			93% at +40°C According to IEC 60068-2-3, non-condensing
Climate class (IEC)			3K3 According to EN 60721
Insulation voltage			
Rated insulation voltage	U _i	V AC	250 According to IEC 60974-1, EN 50178, VDE 0160
Power supply/measuring circuit/relay outputs			Safe isolation According to EN 50178, EN 60950
Rated impulse withstand voltage between all insulated circuits	U _{imp}	kV	4 According to IEC 664, VDE 0110
Test voltage between all circuits		kV	2.5 AC (routine test)
Overvoltage category/pollution degree			According to EN 60950, Class 2
Input circuit			
Rated input voltage		V	110...240 AC / 100...350 DC (supplied from the input circuit of the power supply)
Primary voltage range		V	70...264 AC
Primary voltage range		V	80...350 DC
Input power		VA	2.5
Input power		W	1.5
REMOTE-OFF input			
Switching off			Floating
Switching on			R ≤ 1 kΩ
Input current		mA	R ≥ 10 kΩ
Cable length		m	Normally 1 (200 mA for 200 µs)
			25
Measuring circuits			
INPUT			
Monitoring function			Undervoltage monitoring
Threshold values			85 V AC / 90 V DC
Accuracy/tolerance		%	-5 % for AC and DC
Hysteresis relative to the threshold value			Normally -8 % for AC and -30 % for DC
Measuring cycle, max.		ms	Normally ≤ 50
OUTPUT			
Monitoring function			Undervoltage monitoring
Threshold values			20 V DC
Accuracy/tolerance		%	±1
Hysteresis relative to the threshold value		%	Normally 5
Measuring cycle, max.		ms	Normally ≤ 10




SN3-000-MMEU8		
Output circuit		
Contacts	Number	11-12/14, 21-22/24
Operating principle		2 x 1 relay (changeover contact)
Contact material		Quiescent current principle
Rated voltage	V	AgNi
Minimum switching voltage	V	250 According to VDE 0110, IEC 60947-1
Maximum switching voltage	V	24
Minimum switching voltage	mA	250
Maximum switching current	A	10
Rated operational current		1
AC-12 (resistive) 230 V		1 A
AC-15 (inductive) 230 V		1 A
DC-12 (resistive) 24 V		1 A
DC-13 (inductive) 24 V		1 A
Durability		
Mechanical		30×10^6 operations
Electrical		0.1×10^6 operations
Short-circuit rating		
NC contacts	A	gL
N/O contacts	A	gL
Operating state display		
Input OK		LED lit green when relay "Input OK" picked up
Output OK		LED lit green when relay "Output OK" picked up
Remote OFF		LED lit green when relay "Remote OFF" input R $\leq 1\text{k}\Omega$
Notes	Data at $T_u = 25^\circ\text{C}$, $U_{IN} = 230\text{ V AC}$ and nominal values, when no others are given	

Dimensions

GW4...

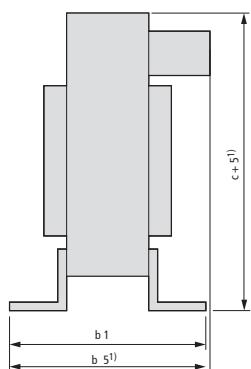


GD4...

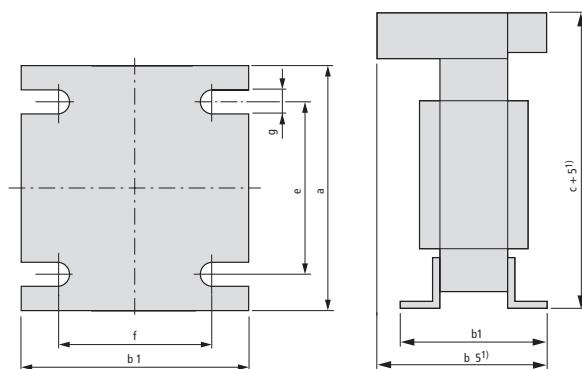

SN3-050

SN3-100

SN3-200

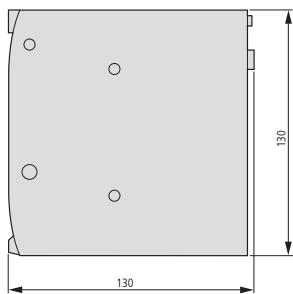

SN3-000-MMEU8

